
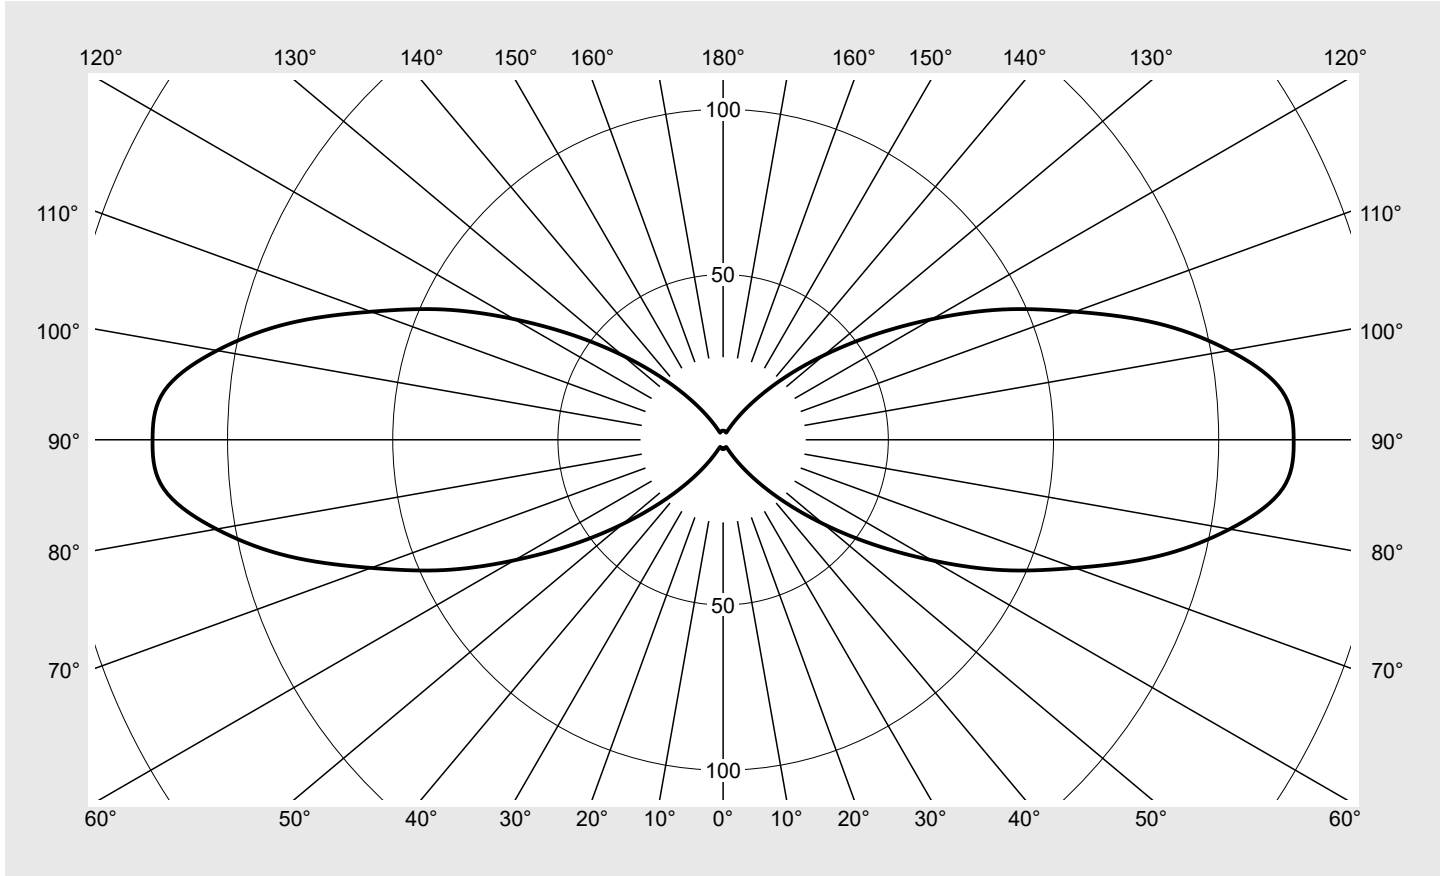


# Photometric test report

<b>Family</b> <b>Silica® 21 Ring</b>	<b>Order number: 5PJBO3D3004A</b> <b>EAN: 4058352959053</b>	<b>LP number</b> <b>59505_19</b>
	<b>Version</b> suspended luminaire incl. Pendant, white, outer ring side luminous, cover opal, polycarbonate, frosted, diffuse beam  <b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG-DALI <b>Rated values</b> Net luminous flux = 7210 lm Power consumption = 105.0 W Luminous efficacy = 68.7 lm/W	<b>serial documentation</b> <b>08.11.2023</b>  

**Luminous intensity in cd/klm** C180-0 **Imax: 173 cd/klm**



Classifications	
DIN 5040	C 1 1
CIE	N1=2 N2=16 N3=49 N4=50 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	50.0%
$\phi_o$	50.0%

**Measurement conditions**  
 DIN EN 13032 and DIN 5032

## Photometric test report

Family <b>Silica® 21 Ring</b>	Order number: <b>5PJBO3D3004A</b> EAN: <b>4058352959053</b>	LP number <b>59505_19</b>
----------------------------------	--	------------------------------

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>	<b>sITeco</b>
---	-----------------------------------	---------------

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	2.4	0.0	0.0
5°	2.8	0.1	0.1
10°	2.7	0.3	0.4
15°	2.6	0.4	0.8
20°	2.4	0.4	1.2
25°	2.7	0.6	1.8
30°	5.1	1.4	3.2
35°	10.0	3.1	6.4
40°	17.4	6.1	12.5
45°	27.2	10.5	23.0
50°	39.7	16.7	39.7
55°	55.0	24.7	64.4
60°	72.9	34.6	99.0
65°	93.3	46.4	145.4
70°	113.4	58.4	203.8
75°	136.2	72.1	275.9
80°	155.7	84.0	360.0
85°	170.0	92.8	452.8
90°	172.7	94.7	547.4
95°	169.8	92.7	640.2
100°	155.5	84.0	724.1
105°	136.1	72.1	796.2
110°	113.4	58.4	854.6
115°	93.3	46.4	901.0
120°	73.0	34.7	935.6
125°	55.0	24.7	960.3
130°	39.7	16.7	977.0
135°	27.2	10.5	987.5
140°	17.3	6.1	993.6
145°	10.0	3.1	996.8
150°	5.2	1.4	998.2
155°	2.7	0.6	998.8
160°	2.4	0.4	999.2
165°	2.6	0.4	999.6
170°	2.7	0.3	999.9
175°	2.8	0.1	1000.0
180°	2.6	0.0	1000.0

## Photometric test report

Family <b>Silica® 21 Ring</b>	Order number: <b>5PJBO3D3004A</b> EAN: <b>4058352959053</b>	LP number <b>59505_19</b>
----------------------------------	--	------------------------------

UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	25.2	26.7	25.9	27.5	28.4	25.2	26.7	25.9	27.5	28.4
	3H	30.0	31.3	30.7	32.1	33.1	30.0	31.3	30.7	32.1	33.1
	4H	32.4	33.7	33.1	34.5	35.5	32.4	33.7	33.1	34.5	35.5
	6H	34.7	35.9	35.5	36.7	37.8	34.7	35.9	35.5	36.7	37.8
	8H	35.7	36.8	36.5	37.7	38.8	35.7	36.8	36.5	37.7	38.8
	12H	36.7	37.8	37.6	38.7	39.8	36.7	37.8	37.6	38.7	39.8
4H	2H	26.8	28.1	27.5	28.9	29.9	26.8	28.1	27.5	28.9	29.9
	3H	31.3	32.4	32.1	33.3	34.4	31.3	32.4	32.1	33.3	34.4
	4H	33.7	34.8	34.6	35.7	36.8	33.7	34.8	34.6	35.7	36.8
	6H	36.1	37.0	36.9	37.9	39.1	36.1	37.0	36.9	37.9	39.1
	8H	37.2	38.1	38.1	39.0	40.2	37.2	38.1	38.1	39.0	40.2
	12H	38.3	39.1	39.2	40.0	41.2	38.3	39.1	39.2	40.0	41.2
8H	4H	34.5	35.4	35.4	36.3	37.5	34.5	35.4	35.4	36.3	37.5
	6H	37.0	37.8	37.9	38.7	39.9	37.0	37.8	37.9	38.7	39.9
	8H	38.3	39.0	39.2	39.9	41.2	38.3	39.0	39.2	39.9	41.2
	12H	39.5	40.1	40.4	41.1	42.4	39.5	40.1	40.4	41.1	42.4
12H	4H	34.7	35.5	35.6	36.4	37.7	34.7	35.5	35.6	36.4	37.7
	6H	37.3	38.0	38.2	39.0	40.2	37.3	38.0	38.2	39.0	40.2
	8H	38.6	39.3	39.6	40.2	41.5	38.6	39.3	39.6	40.2	41.5

<b>Luminance table</b>	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 66	H(C0) = 48 H(C90) = 48	H(C180) = 48 H(C270) = 48
------------------------	---------------------------------	--------------------------------------	---------------------------	------------------------------

C-planes	0°
$\gamma$	Luminance in cd/m <sup>2</sup>
45°	42081.5
50°	61882.9
55°	86982.5
60°	118078.4
65°	155881.1
70°	197153.2
75°	248860.9
80°	302258.7
85°	354822.2

**Photometric test report**

<b>Family</b> Silica® 21 Ring	<b>Order number: 5PJBO3D3004A</b> <b>EAN: 4058352959053</b>	<b>LP number</b> 59505_19
----------------------------------	--	------------------------------

**Luminance values in cd/m<sup>2</sup>**        $\gamma$  65°      $\gamma$  70°      $\gamma$  75°      $\gamma$  80°      $\gamma$  85°

**siteco**

