


Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2A11F08GE EAN: 4058352990995	LP number 58293_406
	Version post-top or side-entry mounting Optic asymmetric, wide distribution (ST1.2a) Cover transparent, PMMA Lamps LED 1800 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 2320 lm Power consumption = 23.2 W Luminous efficacy = 100 lm/W	serial documentation 28.11.2023





Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 652 cd/klm**

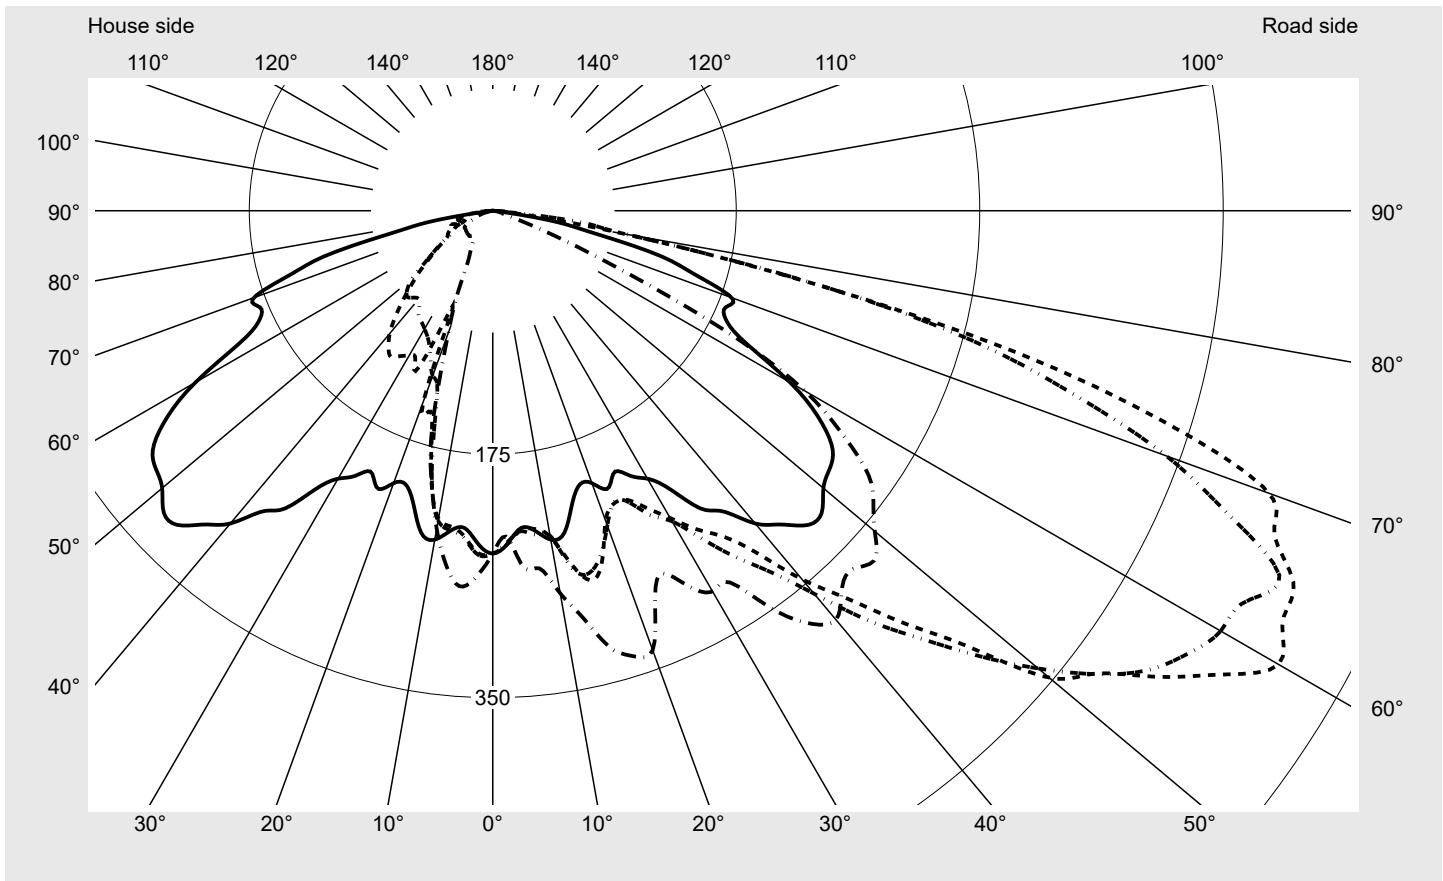

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	593.9
Imax 80°	98.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2A11F08GE EAN: 4058352990995	LP number 58293_406
--	--	--------------------------------------

Envelope curve in cd/klm **KMK 60°** **KMK 57.5°** **KMK 55°** **KMK 52.5°** **siteco**

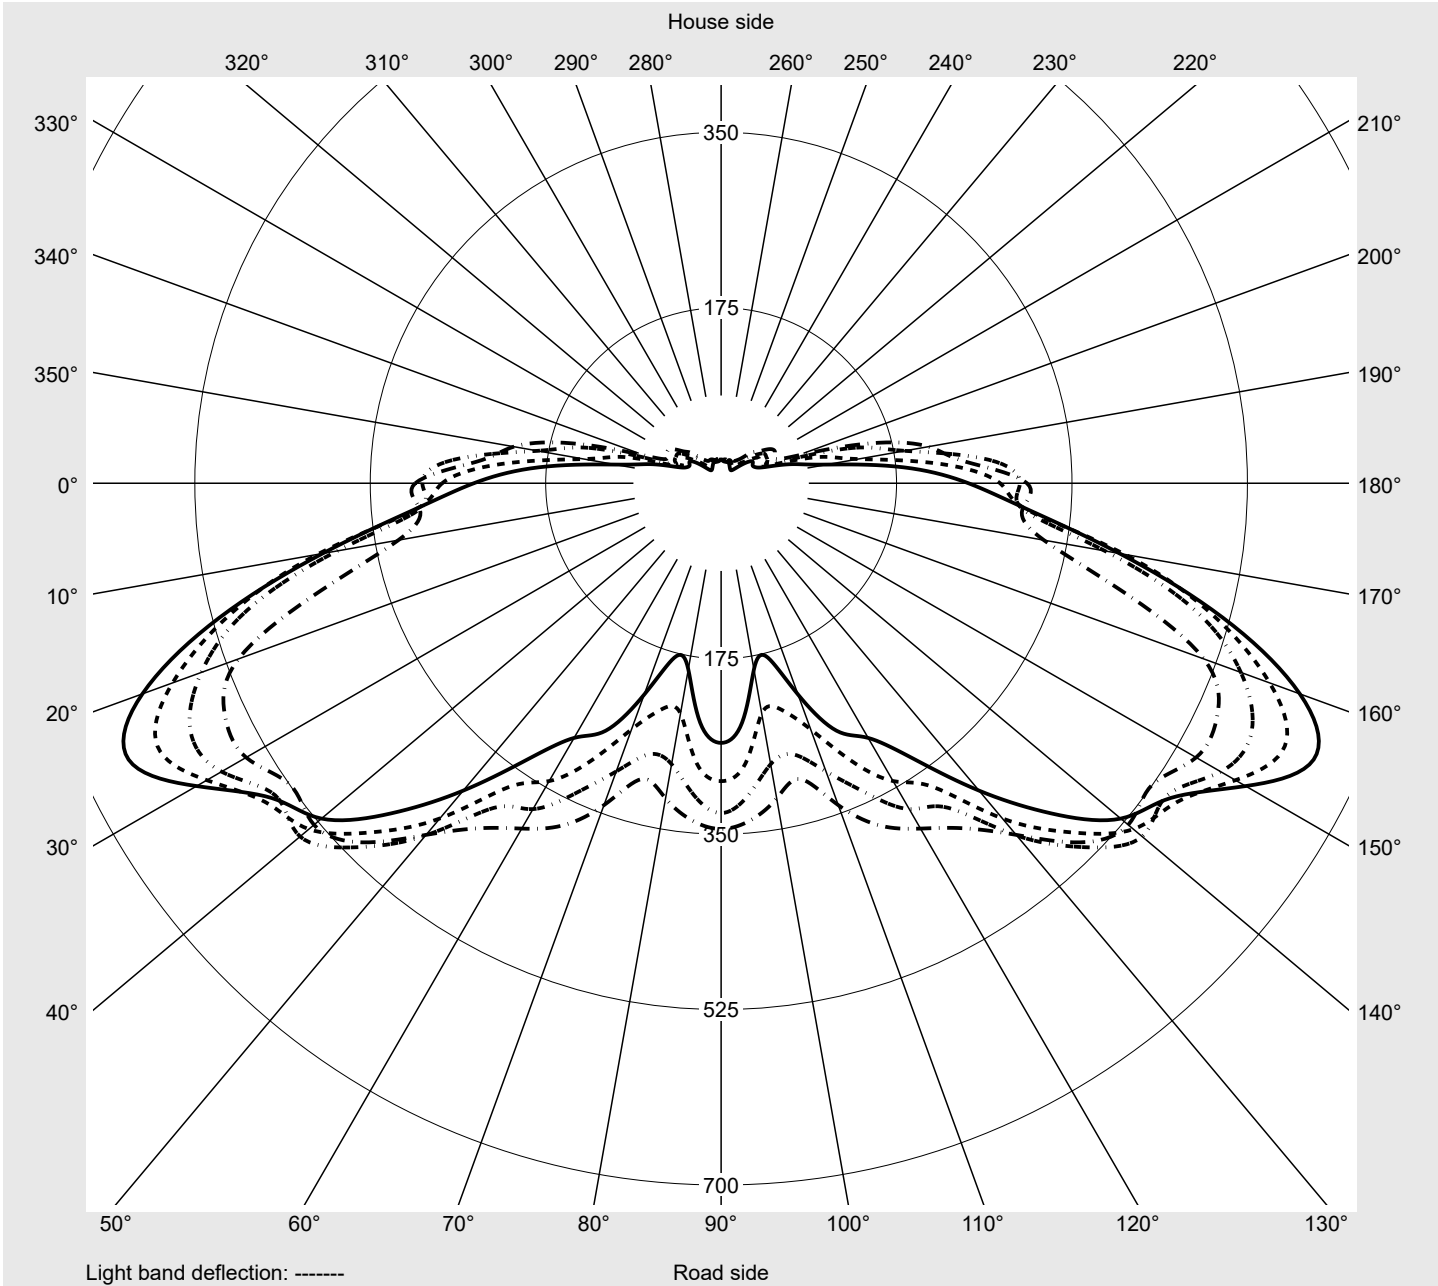

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2A11F08GE EAN: 4058352990995	LP number 58293_406
Table of values for luminous intensities		Maximum luminous intensity
		sitEco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4
2,5°	239.8	240.0	240.1	239.7	240.0	239.8	238.6	237.2	236.7	236.5	235.6	235.3	234.4
5,0°	229.1	228.4	228.7	229.6	230.3	230.5	231.2	232.4	235.4	238.5	239.7	241.9	242.5
7,5°	231.9	232.6	231.2	229.7	229.3	230.7	234.7	239.7	244.4	248.4	250.9	254.0	255.3
10,0°	240.0	245.5	244.0	240.9	238.8	237.8	236.9	240.2	245.1	251.2	258.7	264.9	272.0
12,5°	237.3	248.6	259.0	262.1	260.8	259.9	262.9	262.2	260.3	267.2	276.2	282.6	282.7
15,0°	219.3	225.4	240.1	256.9	269.9	275.0	269.3	265.6	263.3	261.3	264.6	271.9	281.1
17,5°	206.8	214.9	231.6	247.1	254.2	262.3	258.8	252.0	246.2	242.9	244.5	247.3	257.3
20,0°	208.4	221.3	226.4	230.6	233.9	237.1	240.8	248.5	251.5	245.3	240.1	242.0	254.3
22,5°	216.1	219.3	220.3	223.1	226.9	227.7	227.1	227.7	235.4	240.6	242.8	248.2	253.0
25,0°	207.1	214.4	224.2	232.5	232.6	229.4	231.1	234.6	239.8	243.8	257.3	260.7	268.7
27,5°	215.0	225.1	225.5	231.9	237.3	241.3	246.8	251.6	257.6	266.8	281.0	288.8	303.3
30,0°	222.4	233.4	237.1	242.8	250.8	255.0	257.8	266.5	281.3	295.2	308.3	320.8	334.8
32,5°	237.4	244.8	245.8	249.4	262.0	271.1	279.1	290.5	312.4	328.5	340.2	345.4	356.7
35,0°	261.6	267.3	267.7	267.3	274.5	285.1	303.6	321.6	334.8	353.0	362.6	378.3	388.1
37,5°	272.5	277.6	279.9	285.7	293.6	308.5	326.9	345.0	359.7	372.7	387.7	420.5	413.3
40,0°	293.4	297.1	299.4	309.9	319.5	345.9	359.3	367.5	382.1	408.4	414.9	433.9	441.4
42,5°	305.8	310.7	318.2	336.2	353.8	378.6	399.4	400.4	400.5	427.8	436.5	449.4	450.6
45,0°	319.6	313.1	321.5	373.8	392.3	420.0	434.8	431.2	434.8	457.0	452.4	447.1	446.6
47,5°	320.8	309.8	325.1	385.4	419.7	463.8	473.6	464.3	469.8	469.4	456.5	443.9	445.2
50,0°	310.2	307.2	315.4	392.2	452.4	522.3	511.8	491.4	505.3	487.1	454.1	435.2	423.2
52,5°	305.1	301.6	326.9	413.0	512.4	546.3	547.1	524.7	530.1	506.6	457.9	420.1	397.8
55,0°	298.1	302.5	388.7	489.5	551.8	584.1	575.4	542.9	548.3	513.5	458.7	395.3	375.4
57,5°	278.3	306.9	409.1	507.8	582.3	620.5	592.4	554.8	536.8	492.4	436.5	370.2	343.0
60,0°	246.7	308.6	403.8	518.1	614.4	652.2	604.1	547.4	520.4	465.8	400.3	336.1	293.3
62,5°	203.8	309.3	401.4	514.5	592.8	640.0	609.1	568.3	505.6	448.4	370.3	308.4	244.7
65,0°	184.8	305.8	399.8	491.5	545.4	635.2	624.2	536.2	477.4	421.4	336.1	290.3	208.4
67,5°	181.2	300.3	385.2	455.9	537.1	608.0	573.8	499.7	429.1	379.6	303.5	252.0	174.7
70,0°	182.8	298.3	348.6	421.3	536.1	593.9	515.4	439.2	393.7	335.0	261.7	204.6	153.3
72,5°	152.3	295.2	340.0	415.6	464.5	507.8	436.8	365.4	336.0	281.8	215.0	165.1	137.1
75,0°	123.4	244.9	296.2	319.8	343.4	381.6	351.0	272.8	224.7	206.6	172.7	145.5	127.0
77,5°	74.5	181.8	192.1	227.4	191.9	217.5	221.5	172.7	139.2	141.8	115.3	105.6	88.0
80,0°	47.1	60.2	72.3	86.8	96.2	97.8	98.2	98.9	96.2	95.3	52.2	40.0	30.9
82,5°	9.3	12.5	13.4	18.9	18.9	29.8	65.1	93.0	67.0	41.5	23.5	16.6	10.9
85,0°	3.5	3.3	3.7	4.4	5.5	7.4	9.6	16.6	11.6	10.1	9.4	7.2	6.3
87,5°	2.3	2.4	2.6	2.9	3.1	3.3	3.6	4.1	4.4	4.0	3.8	3.7	3.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2A11F08GE EAN: 4058352990995	LP number 58293_406
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4
2,5°	234.1	233.5	232.9	233.4	234.2	235.0	241.0	242.5	243.2	244.5	246.1	247.4	248.1
5,0°	244.3	246.1	247.2	250.8	255.4	257.5	231.6	232.2	232.8	232.6	234.9	236.2	234.4
7,5°	259.1	260.3	263.4	262.6	260.8	259.4	230.1	229.9	228.3	227.7	229.0	231.6	231.0
10,0°	272.7	271.8	271.6	272.6	275.4	279.2	233.5	228.8	225.7	223.4	224.7	226.2	223.3
12,5°	285.6	286.2	290.0	295.9	298.0	299.6	227.2	221.3	214.0	207.4	202.7	202.1	203.7
15,0°	282.9	288.2	301.7	314.1	320.8	324.6	210.7	201.6	193.5	182.8	169.7	162.8	156.0
17,5°	275.5	290.1	300.8	317.3	329.9	335.7	199.0	192.5	185.9	171.1	151.0	132.5	124.4
20,0°	266.9	281.0	296.7	311.8	330.4	336.1	198.2	187.6	172.6	163.2	145.4	126.2	113.8
22,5°	264.4	276.4	296.7	308.8	307.9	304.8	194.5	174.3	162.8	143.5	74.0	116.6	98.7
25,0°	273.7	286.6	295.4	294.2	295.9	287.6	195.6	169.8	156.1	135.8	121.1	107.6	89.5
27,5°	302.2	308.3	307.5	302.6	297.9	304.0	195.8	178.3	162.7	136.6	120.6	101.8	83.5
30,0°	338.0	331.1	312.4	313.6	311.7	315.9	207.9	188.4	165.9	142.2	120.1	98.1	77.8
32,5°	351.6	334.4	325.1	337.0	328.7	316.6	224.1	203.2	170.7	147.0	123.9	95.1	73.8
35,0°	381.8	364.5	359.3	364.4	357.6	348.7	254.1	231.6	188.3	154.7	127.9	92.7	72.5
37,5°	400.8	388.8	368.5	359.8	364.8	373.8	263.8	240.0	192.1	161.1	123.0	86.7	73.2
40,0°	426.7	407.3	369.0	349.1	366.6	383.8	284.2	250.4	192.1	160.5	115.3	82.8	76.0
42,5°	445.4	405.8	374.1	350.6	367.9	371.2	294.9	249.1	189.9	153.0	103.8	84.7	76.8
45,0°	454.6	404.8	367.5	355.3	367.9	364.9	304.7	253.4	189.5	145.6	91.7	87.2	83.4
47,5°	444.2	397.0	350.0	356.6	373.5	371.9	285.3	245.8	183.2	123.3	79.8	83.2	80.6
50,0°	415.6	363.0	328.5	334.1	367.2	358.4	246.0	208.6	170.2	99.8	69.6	75.4	71.6
52,5°	377.0	341.7	305.5	319.2	337.4	344.8	245.2	210.0	153.6	79.9	59.0	62.0	59.4
55,0°	340.5	305.9	280.1	284.6	312.2	329.0	268.2	186.1	136.3	60.7	50.5	52.1	51.7
57,5°	304.7	261.3	234.1	233.3	280.3	297.2	220.2	138.9	101.2	52.2	43.1	44.3	44.4
60,0°	272.4	224.3	180.1	188.5	239.8	259.0	182.4	107.2	73.6	47.7	37.8	36.3	38.0
62,5°	220.8	167.7	135.7	140.5	177.7	194.5	144.0	86.7	60.7	46.5	36.4	32.0	31.7
65,0°	173.8	118.9	93.3	100.8	117.9	110.3	115.5	69.8	50.4	41.5	34.4	30.3	28.6
67,5°	127.0	81.4	58.3	50.3	53.2	55.8	112.4	66.9	43.1	33.6	31.4	26.8	22.4
70,0°	110.0	67.0	36.1	23.4	24.0	23.7	111.5	64.4	43.1	30.9	28.2	21.7	19.7
72,5°	95.0	38.0	20.3	11.1	10.3	9.3	90.0	56.0	44.0	38.4	31.8	23.7	19.8
75,0°	83.9	21.9	12.7	8.3	7.2	7.1	63.0	53.1	47.7	34.4	29.9	25.7	18.1
77,5°	31.9	15.2	9.0	6.5	5.7	5.5	54.2	48.4	47.2	30.9	25.1	22.1	16.2
80,0°	14.1	9.7	6.4	5.0	4.4	4.2	36.4	35.4	29.8	22.2	19.6	18.2	16.2
82,5°	9.0	6.6	4.7	3.7	3.2	3.1	9.7	11.3	14.2	14.6	15.4	11.1	10.4
85,0°	5.2	3.9	2.9	2.3	1.9	1.7	3.1	3.1	3.2	3.3	3.4	3.5	3.5
87,5°	3.0	2.2	1.5	1.2	1.0	1.0	2.2	2.0	2.0	2.0	1.9	1.9	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2A11F08GE EAN: 4058352990995	LP number 58293_406
Table of values for luminous intensities		Maximum luminous intensity
		sITeCO

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	0.4	0.4
2,5°	249.5	252.2	254.7	257.5	259.7	261.3	261.3	261.3	262.1	262.4	262.8	2.9	3.3
5,0°	231.6	233.6	237.0	241.2	245.2	249.9	256.6	263.5	269.0	271.4	271.0	5.8	9.1
7,5°	225.8	225.3	227.9	229.8	234.2	239.7	243.5	246.5	250.9	255.1	256.9	8.6	17.7
10,0°	214.9	206.6	211.0	211.6	215.6	218.1	225.4	229.7	234.1	233.6	232.1	11.4	29.1
12,5°	205.5	194.6	195.1	193.5	195.4	200.0	205.8	215.1	216.6	206.7	202.2	14.2	43.3
15,0°	155.4	160.1	160.7	158.6	157.5	160.9	168.0	169.1	179.2	173.9	171.9	15.8	59.1
17,5°	121.8	123.5	125.8	124.8	119.6	125.9	127.1	123.3	124.5	126.5	127.6	16.7	75.9
20,0°	106.9	108.0	108.3	102.2	91.8	85.2	85.0	83.3	89.9	94.2	93.3	17.8	93.7
22,5°	90.5	90.6	95.5	88.8	77.0	70.1	67.6	63.8	62.9	62.6	70.1	18.6	112.3
25,0°	76.4	77.8	84.5	74.0	71.7	64.2	62.0	54.8	48.0	44.9	46.3	20.3	132.7
27,5°	68.7	60.3	56.3	57.6	57.9	53.0	52.5	44.8	39.0	37.0	36.1	22.7	155.4
30,0°	65.1	58.5	54.4	51.3	46.7	43.1	39.1	38.0	34.6	31.9	30.8	25.7	181.1
32,5°	63.3	57.4	53.7	46.9	39.3	34.9	32.3	30.9	29.7	28.1	26.3	28.9	210.0
35,0°	65.2	58.8	52.1	43.5	36.9	31.4	28.3	26.5	25.1	24.5	24.1	33.2	243.2
37,5°	66.6	58.3	50.3	42.4	36.2	31.2	26.4	24.9	23.6	24.2	23.4	36.8	280.0
40,0°	70.0	59.1	50.2	41.5	33.5	27.6	25.6	24.3	24.1	24.1	23.4	40.8	320.8
42,5°	71.2	59.5	50.3	40.5	32.6	27.3	24.6	24.4	24.3	23.8	24.8	44.5	365.3
45,0°	74.6	61.9	46.1	36.6	31.9	28.1	24.6	24.3	24.1	24.3	24.5	48.0	413.3
47,5°	70.1	55.1	41.9	34.0	30.1	27.6	24.8	24.2	24.2	24.2	24.6	50.6	463.9
50,0°	58.1	48.8	38.8	31.0	29.0	26.4	25.4	24.3	24.2	24.2	24.2	51.8	515.7
52,5°	49.6	43.2	33.6	28.2	25.7	25.8	25.3	24.1	24.3	24.7	24.1	53.3	569.0
55,0°	43.5	36.5	28.4	24.7	23.3	23.8	24.6	23.5	24.2	23.6	23.7	54.9	623.9
57,5°	36.2	29.1	22.9	20.4	21.4	22.1	23.1	22.7	22.9	23.1	23.6	53.9	677.8
60,0°	31.5	22.4	17.1	16.3	17.5	19.6	21.7	21.9	21.8	22.3	23.3	52.0	729.9
62,5°	25.2	17.7	13.2	12.8	14.7	17.2	19.3	19.4	19.7	20.4	20.9	49.2	779.1
65,0°	20.3	14.6	11.5	10.5	12.0	14.7	17.0	16.9	17.5	17.0	17.7	45.9	824.9
67,5°	18.1	13.7	10.7	9.4	10.0	11.5	13.5	14.1	14.8	13.6	14.4	41.9	866.8
70,0°	16.3	12.0	9.9	8.5	8.3	9.3	10.5	11.2	11.9	11.7	11.8	38.6	905.4
72,5°	14.7	10.9	8.3	7.1	6.8	7.7	8.1	8.4	9.0	9.3	9.3	34.1	939.5
75,0°	12.7	10.3	7.2	6.0	5.6	5.9	6.2	6.5	6.5	6.5	6.7	27.2	966.6
77,5°	10.4	7.6	5.8	5.1	4.5	4.1	4.4	4.6	3.7	3.2	3.1	18.1	984.8
80,0°	10.8	6.1	4.2	3.9	3.3	3.0	2.8	2.9	2.0	1.0	0.6	9.2	994.0
82,5°	7.4	4.7	3.4	2.9	2.5	2.2	1.9	1.9	1.1	0.6	0.4	4.3	998.3
85,0°	3.4	2.6	2.3	1.9	1.8	1.4	1.0	0.9	0.7	0.4	0.4	1.2	999.4
87,5°	1.6	1.5	1.2	1.2	1.0	0.9	0.7	0.6	0.5	0.4	0.4	0.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2A11F08GE EAN: 4058352990995	LP number 58293_406
--	--	--------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	2320	23.2	23.8	23.5
95	241	252	2201	22.0	22.7	22.4
90	229	250	2092	21.0	21.5	21.2
85	216	248	1973	19.7	20.3	20.0
80	203	246	1854	18.5	19.1	18.8
75	190	243	1735	17.4	17.9	17.6
70	178	241	1626	16.4	16.8	16.6
65	165	238	1507	15.2	15.7	15.4
60	152	235	1388	14.1	14.5	14.3
55	140	232	1279	13.1	13.4	13.2
50	127	229	1160	12.0	12.4	12.2
45	114	225	1041	10.9	11.2	11.0
40	102	221	932	10.0	10.2	10.1
35	89	216	813	9.0	9.2	9.1
30	76	210	694	8.0	8.2	8.1
25	63	203	575	6.9	7.1	7.0
20	51	195	466	6.0	6.2	6.1
16	41	187	374	5.3	5.4	5.4