




Photometric test report

Family Lunis 21	Order number: 51DB15TC91C EAN: 4069025013354	LP number 59573_41
	Version recessed luminaire, Combined lens and reflector optics, reflector, highly specular, rotationally symmetrical medium distribution, adjustable color temperature: 3000K 4000K 6500K, UGR≤19 (L65≤3000cd/m²)	serial documentation 11.04.2024
	Lamps LED 4000 K CRI ≥ 80	
	Controlgear ECG Multilumen	
	Setting factory setting: DIP-Step=4, colour temperature 4000K	
Rated values Net luminous flux = 1820 lm Power consumption = 11.0 W Luminous efficacy = 165.5 lm/W		

Luminous intensity in cd/klm C180-0 **Imax: 1417 cd/klm**

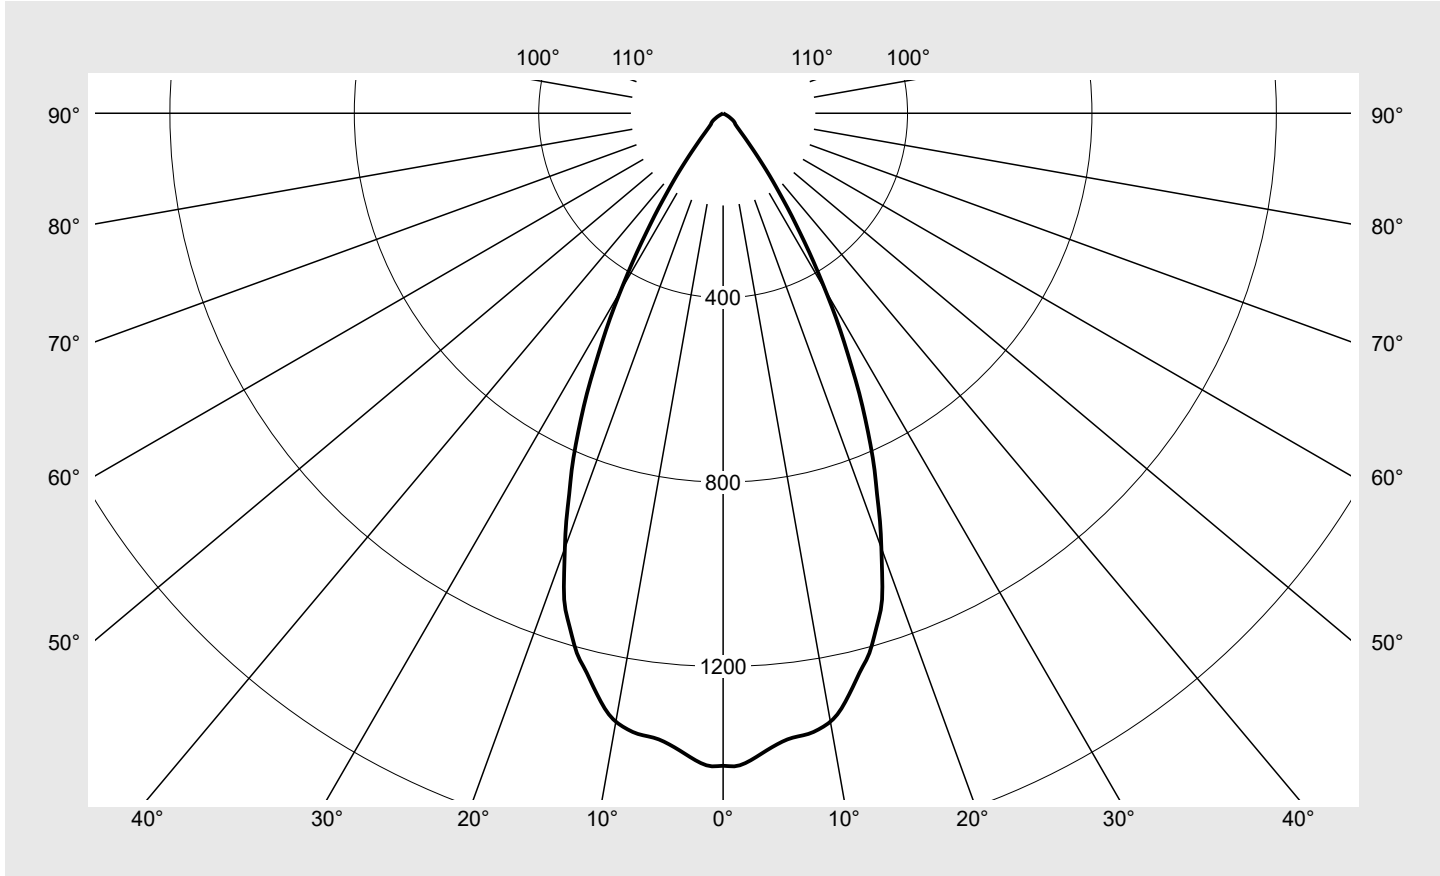

Classifications	
DIN 5040	A 7 0
CIE	N1=95 N2=100 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Lunis 21	Order number: 51DB15TC91C EAN: 4069025013354	LP number 59573_41
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	1415.3	0.3	0.3
1°	1416.8	2.7	3.1
2°	1409.9	5.4	8.4
3°	1397.4	8.0	16.5
4°	1384.1	10.6	27.1
5°	1372.7	13.1	40.2
6°	1364.4	15.6	55.8
7°	1361.0	18.2	74.0
8°	1358.1	20.7	94.7
9°	1350.7	23.2	117.9
10°	1340.1	25.5	143.4
11°	1322.2	27.7	171.1
12°	1296.4	29.6	200.6
13°	1268.5	31.3	231.9
14°	1241.6	32.9	264.9
15°	1217.8	34.6	299.4
16°	1184.9	35.8	335.3
17°	1150.7	36.9	372.1
18°	1114.5	37.8	409.9
19°	1059.7	37.8	447.7
20°	1003.6	37.6	485.4
21°	949.8	37.3	522.7
22°	891.3	36.6	559.3
23°	840.7	36.0	595.4
24°	785.1	35.0	630.4
25°	728.0	33.7	664.1
26°	670.9	32.3	696.4
27°	609.9	30.4	726.7
28°	554.4	28.5	755.3
29°	500.5	26.6	781.9
30°	444.1	24.4	806.2
31°	393.2	22.2	828.4
32°	344.6	20.0	848.5
33°	297.9	17.8	866.2
34°	258.6	15.9	882.1
35°	219.9	13.8	895.9
36°	188.6	12.2	908.1
37°	159.9	10.6	918.7
38°	133.0	9.0	927.6
39°	111.0	7.7	935.3
40°	92.3	6.5	941.8
41°	78.5	5.6	947.4
42°	67.1	4.9	952.4
43°	57.6	4.3	956.7
44°	50.8	3.9	960.5
45°	45.3	3.5	964.1
46°	41.3	3.3	967.3

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
47°	38.2	3.1	970.4
48°	35.6	2.9	973.3
49°	34.3	2.8	976.1
50°	33.5	2.8	978.9
51°	32.0	2.7	981.7
52°	30.5	2.6	984.3
53°	28.9	2.5	986.8
54°	26.7	2.4	989.2
55°	24.2	2.2	991.4
56°	20.9	1.9	993.3
57°	18.3	1.7	994.9
58°	16.1	1.5	996.4
59°	13.5	1.3	997.7
60°	9.6	0.9	998.6
61°	6.6	0.6	999.2
62°	4.1	0.4	999.7
63°	2.1	0.2	999.9
64°	0.7	0.1	999.9
65°	0.3	0.0	1000.0
66°	0.3	0.0	1000.0
67°	0.0	0.0	1000.0
68°	0.0	0.0	1000.0
69°	0.1	0.0	1000.0
70°	0.0	0.0	1000.0
71°	0.0	0.0	1000.0
72°	0.0	0.0	1000.0
73°	0.0	0.0	1000.0
74°	0.0	0.0	1000.0
75°	0.0	0.0	1000.0
76°	0.0	0.0	1000.0
77°	0.0	0.0	1000.0
78°	0.0	0.0	1000.0
79°	0.0	0.0	1000.0
80°	0.0	0.0	1000.0
81°	0.0	0.0	1000.0
82°	0.0	0.0	1000.0
83°	0.0	0.0	1000.0
84°	0.0	0.0	1000.0
85°	0.0	0.0	1000.0
86°	0.0	0.0	1000.0
87°	0.0	0.0	1000.0
88°	0.0	0.0	1000.0
89°	0.0	0.0	1000.0
90°	0.0	0.0	1000.0
91°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

Photometric test report

Family Lunis 21	Order number: 51DB15TC91C EAN: 4069025013354	LP number 59573_41
---------------------------	---	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	18.7	19.9	19.1	20.2	20.5	18.7	19.9	19.1	20.2	20.5
	3H	18.6	19.5	19.0	19.9	20.2	18.6	19.5	19.0	19.9	20.2
	4H	18.5	19.4	18.9	19.7	20.1	18.5	19.4	18.9	19.7	20.1
	6H	18.4	19.2	18.8	19.6	20.0	18.4	19.2	18.8	19.6	20.0
	8H	18.5	19.1	19.0	19.5	19.9	18.5	19.1	19.0	19.5	19.9
	12H	18.5	19.0	18.9	19.4	19.9	18.5	19.0	18.9	19.4	19.9
4H	2H	18.6	19.4	19.0	19.8	20.2	18.6	19.4	19.0	19.8	20.2
	3H	18.4	19.1	18.8	19.5	19.9	18.4	19.1	18.8	19.5	19.9
	4H	18.3	18.9	18.7	19.3	19.8	18.3	18.9	18.7	19.3	19.8
	6H	18.2	18.7	18.6	19.1	19.6	18.2	18.7	18.6	19.1	19.6
	8H	18.1	18.6	18.6	19.1	19.5	18.1	18.6	18.6	19.1	19.5
	12H	18.1	18.5	18.6	19.0	19.5	18.1	18.5	18.6	19.0	19.5
8H	4H	18.1	18.6	18.6	19.1	19.5	18.1	18.6	18.6	19.1	19.5
	6H	18.0	18.4	18.5	18.9	19.4	18.0	18.4	18.5	18.9	19.4
	8H	17.9	18.3	18.4	18.8	19.3	17.9	18.3	18.4	18.8	19.3
	12H	17.9	18.2	18.4	18.7	19.2	17.9	18.2	18.4	18.7	19.2
12H	4H	18.1	18.5	18.6	19.0	19.5	18.1	18.5	18.6	19.0	19.5
	6H	18.0	18.3	18.5	18.8	19.3	18.0	18.3	18.5	18.8	19.3
	8H	17.9	18.2	18.4	18.7	19.2	17.9	18.2	18.4	18.7	19.2


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 84
------------------------	---	---

C-planes	0°
γ	Luminance in cd/m²
45°	21017.7
50°	17121.5
55°	13827.7
60°	6299.0
65°	250.2
70°	0.0
75°	0.0
80°	0.0
85°	0.0

Photometric test report

Family Lunis 21	Order number: 51DB15TC91C EAN: 4069025013354	LP number 59573_41
----------------------------------	---	-------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85°

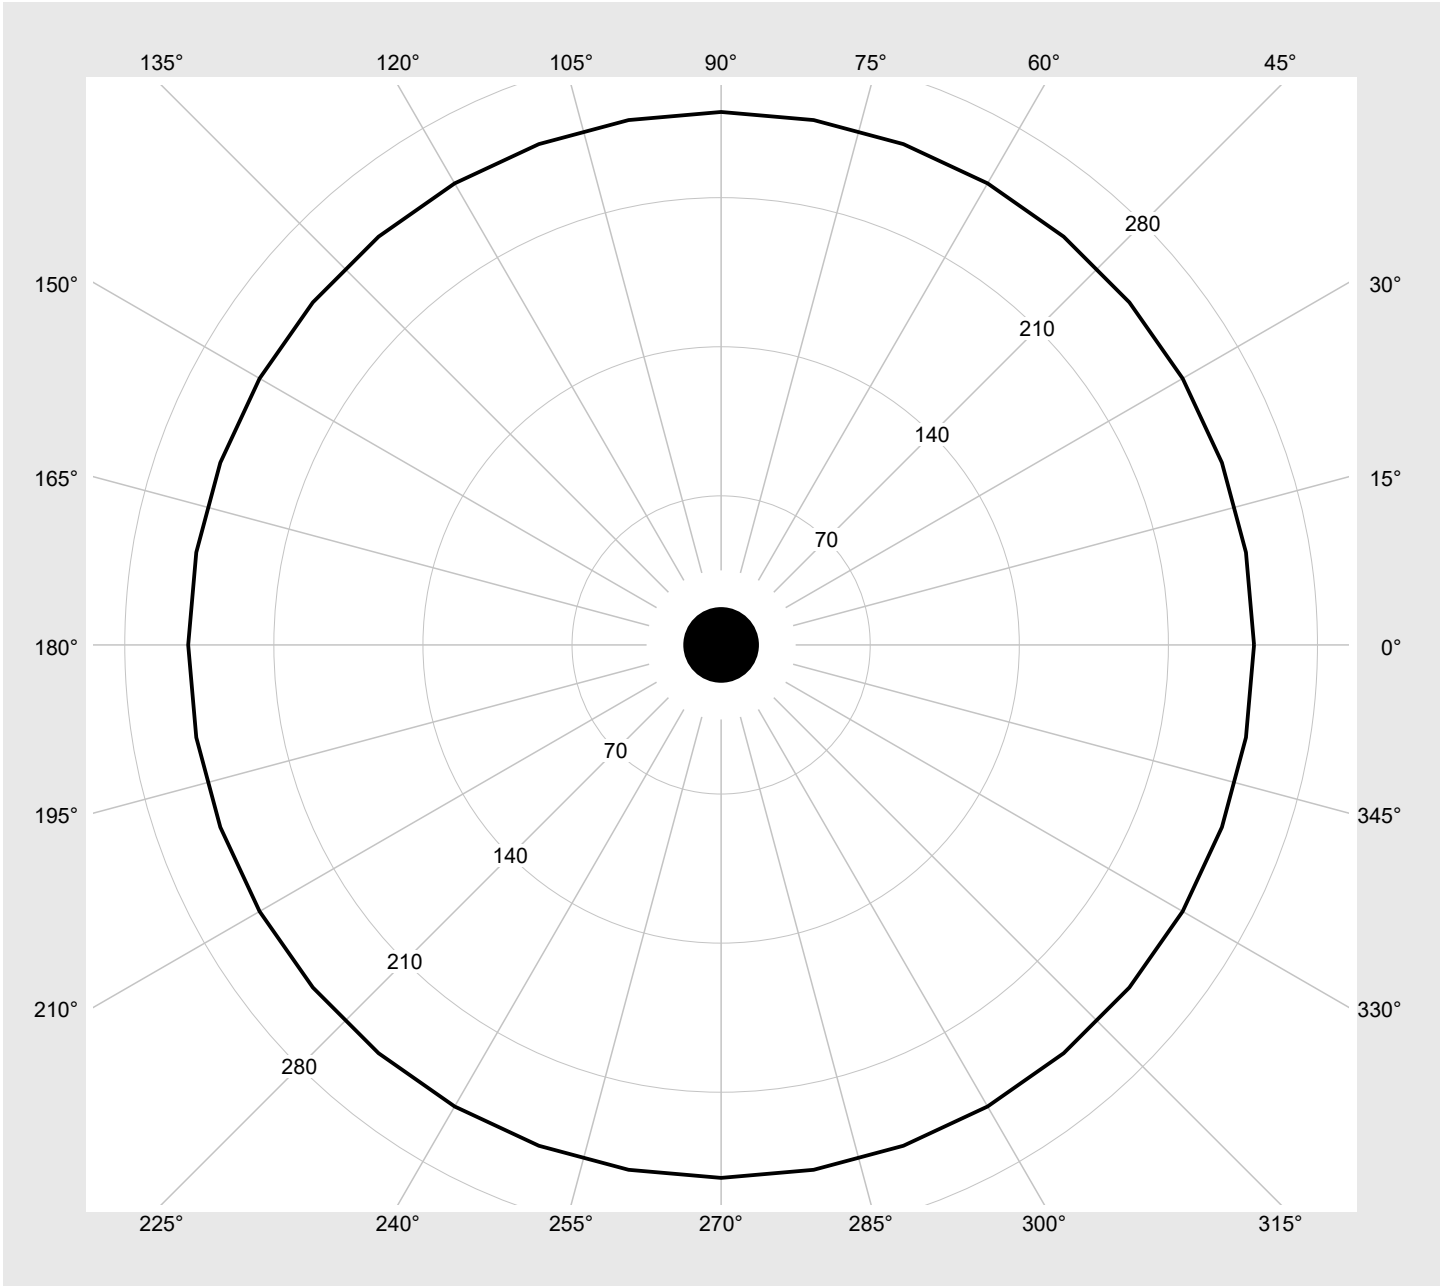

Photometric test report

Family
Lunis 21

Order number: 51DB15TC91C
EAN: 4069025013354

LP number
59573_41

Multilumen Table

environmental temperature: 25°C



DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
12	ON	ON	OFF	OFF	3950	26.0
11	ON	OFF	ON	ON	3650	24.0
10	ON	OFF	ON	OFF	3410	22.0
9	ON	OFF	OFF	ON	3200	20.0
8	ON	OFF	OFF	OFF	3000	19.0
7	OFF	ON	ON	ON	2640	17.0
6	OFF	ON	ON	OFF	2360	15.0
5	OFF	ON	OFF	ON	2100	13.0
4	OFF	ON	OFF	OFF	1820	11.0
3	OFF	OFF	ON	ON	1600	10.0
2	OFF	OFF	ON	OFF	1320	8.0
1	OFF	OFF	OFF	ON	1010	6.0
0	OFF	OFF	OFF	OFF	730	3.0