




# Photometric test report

<b>Family</b> <b>Lunis 21</b>	<b>Order number: 51DB17MC91C</b> <b>EAN: 4069025013156</b>	<b>LP number</b> <b>59573_34</b>
	<b>Version</b>	recessed luminaire, Combined lens and reflector optics, reflector, black, rotationally symmetrical medium distribution, adjustable color temperature: 3000K   4000K   6500K, UGR≤19 (L65≤3000cd/m²)
	<b>Lamps</b>	LED 4000 K   CRI ≥ 80
	<b>Controlgear</b>	ECG Multilumen
	<b>Setting</b>	factory setting: DIP-Step=4, colour temperature 4000K
<b>Rated values</b>	Net luminous flux = 1570 lm Power consumption = 10.6 W Luminous efficacy = 148.1 lm/W	<b>serial documentation</b> 11.04.2024
		

**Luminous intensity in cd/klm** C180-0 **Imax: 1417 cd/klm**

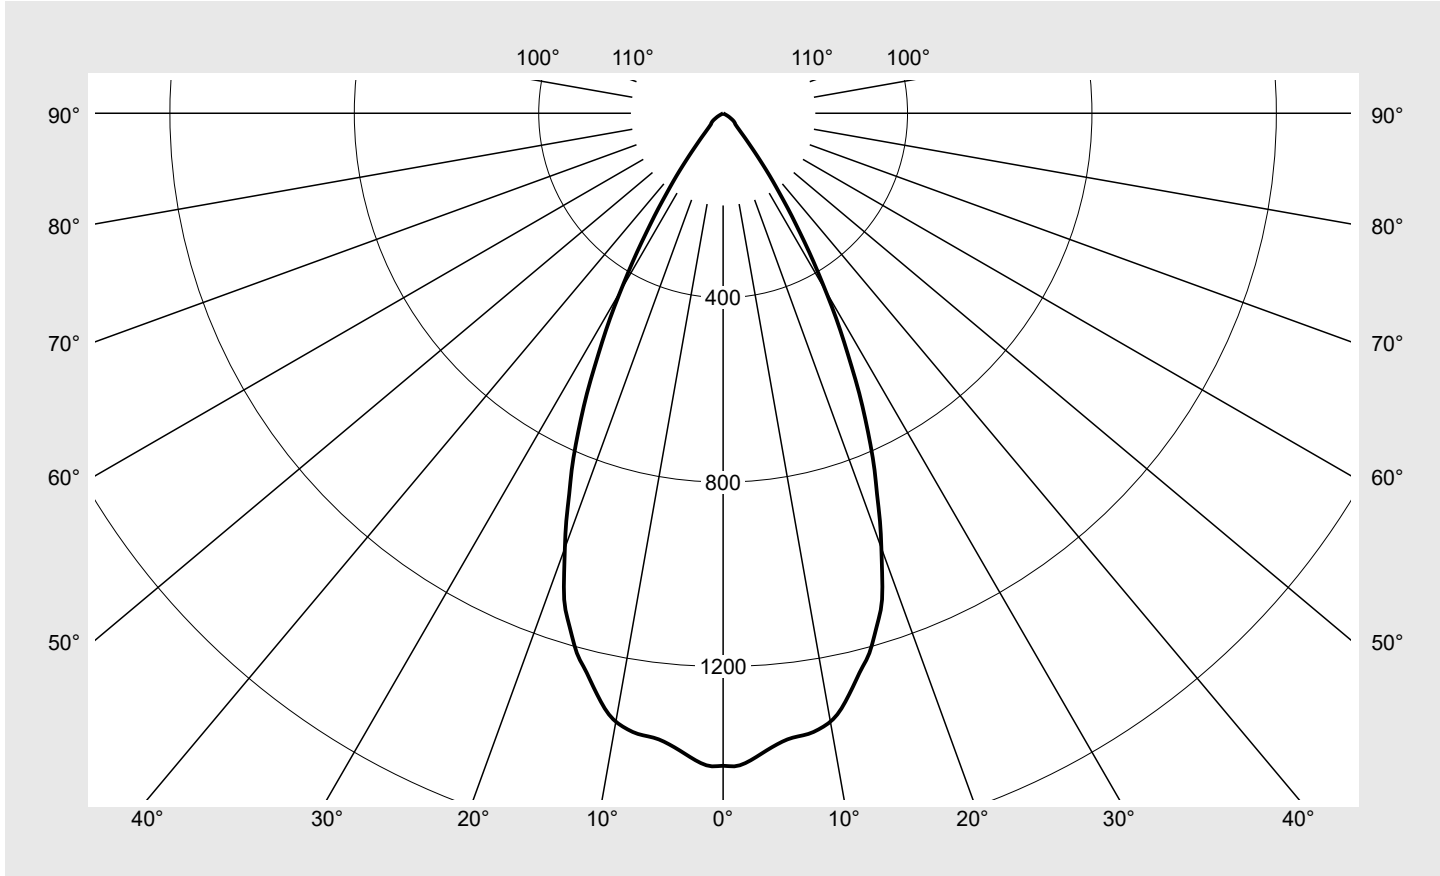

Classifications	
DIN 5040	A 7 0
CIE	N1=95 N2=100 N3=100 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

**Measurement conditions**  
 DIN EN 13032 and DIN 5032

## Photometric test report

Family <b>Lunis 21</b>	Order number: <b>51DB17MC91C</b> EAN: <b>4069025013156</b>	LP number <b>59573_34</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	1415.3	0.3	0.3
1°	1416.8	2.7	3.1
2°	1409.9	5.4	8.4
3°	1397.4	8.0	16.5
4°	1384.1	10.6	27.1
5°	1372.7	13.1	40.2
6°	1364.4	15.6	55.8
7°	1361.0	18.2	74.0
8°	1358.1	20.7	94.7
9°	1350.7	23.2	117.9
10°	1340.1	25.5	143.4
11°	1322.2	27.7	171.1
12°	1296.4	29.6	200.6
13°	1268.5	31.3	231.9
14°	1241.6	32.9	264.9
15°	1217.8	34.6	299.4
16°	1184.9	35.8	335.3
17°	1150.7	36.9	372.1
18°	1114.5	37.8	409.9
19°	1059.7	37.8	447.7
20°	1003.6	37.6	485.4
21°	949.8	37.3	522.7
22°	891.3	36.6	559.3
23°	840.7	36.0	595.4
24°	785.1	35.0	630.4
25°	728.0	33.7	664.1
26°	670.9	32.3	696.4
27°	609.9	30.4	726.7
28°	554.4	28.5	755.3
29°	500.5	26.6	781.9
30°	444.1	24.4	806.2
31°	393.2	22.2	828.4
32°	344.6	20.0	848.5
33°	297.9	17.8	866.2
34°	258.6	15.9	882.1
35°	219.9	13.8	895.9
36°	188.6	12.2	908.1
37°	159.9	10.6	918.7
38°	133.0	9.0	927.6
39°	111.0	7.7	935.3
40°	92.3	6.5	941.8
41°	78.5	5.6	947.4
42°	67.1	4.9	952.4
43°	57.6	4.3	956.7
44°	50.8	3.9	960.5
45°	45.3	3.5	964.1
46°	41.3	3.3	967.3

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm		Luminous flux in lm/klm
47°	38.2	3.1	970.4
48°	35.6	2.9	973.3
49°	34.3	2.8	976.1
50°	33.5	2.8	978.9
51°	32.0	2.7	981.7
52°	30.5	2.6	984.3
53°	28.9	2.5	986.8
54°	26.7	2.4	989.2
55°	24.2	2.2	991.4
56°	20.9	1.9	993.3
57°	18.3	1.7	994.9
58°	16.1	1.5	996.4
59°	13.5	1.3	997.7
60°	9.6	0.9	998.6
61°	6.6	0.6	999.2
62°	4.1	0.4	999.7
63°	2.1	0.2	999.9
64°	0.7	0.1	999.9
65°	0.3	0.0	1000.0
66°	0.3	0.0	1000.0
67°	0.0	0.0	1000.0
68°	0.0	0.0	1000.0
69°	0.1	0.0	1000.0
70°	0.0	0.0	1000.0
71°	0.0	0.0	1000.0
72°	0.0	0.0	1000.0
73°	0.0	0.0	1000.0
74°	0.0	0.0	1000.0
75°	0.0	0.0	1000.0
76°	0.0	0.0	1000.0
77°	0.0	0.0	1000.0
78°	0.0	0.0	1000.0
79°	0.0	0.0	1000.0
80°	0.0	0.0	1000.0
81°	0.0	0.0	1000.0
82°	0.0	0.0	1000.0
83°	0.0	0.0	1000.0
84°	0.0	0.0	1000.0
85°	0.0	0.0	1000.0
86°	0.0	0.0	1000.0
87°	0.0	0.0	1000.0
88°	0.0	0.0	1000.0
89°	0.0	0.0	1000.0
90°	0.0	0.0	1000.0
91°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

## Photometric test report

Family <b>Lunis 21</b>	Order number: <b>51DB17MC91C</b> EAN: <b>4069025013156</b>	LP number <b>59573_34</b>
---------------------------	---------------------------------------------------------------	------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	18.2	19.3	18.6	19.6	20.0	18.2	19.3	18.6	19.6	20.0
	3H	18.1	19.0	18.5	19.4	19.7	18.1	19.0	18.5	19.4	19.7
	4H	18.0	18.9	18.4	19.2	19.6	18.0	18.9	18.4	19.2	19.6
	6H	17.9	18.7	18.3	19.1	19.5	17.9	18.7	18.3	19.1	19.5
	8H	18.0	18.6	18.4	19.0	19.4	18.0	18.6	18.4	19.0	19.4
	12H	18.0	18.5	18.4	18.9	19.3	18.0	18.5	18.4	18.9	19.3
4H	2H	18.0	18.9	18.4	19.3	19.7	18.0	18.9	18.4	19.3	19.7
	3H	17.9	18.6	18.3	19.0	19.4	17.9	18.6	18.3	19.0	19.4
	4H	17.7	18.4	18.2	18.8	19.3	17.7	18.4	18.2	18.8	19.3
	6H	17.6	18.2	18.1	18.6	19.1	17.6	18.2	18.1	18.6	19.1
	8H	17.6	18.1	18.1	18.5	19.0	17.6	18.1	18.1	18.5	19.0
	12H	17.6	18.0	18.1	18.4	18.9	17.6	18.0	18.1	18.4	18.9
8H	4H	17.6	18.1	18.1	18.5	19.0	17.6	18.1	18.1	18.5	19.0
	6H	17.5	17.9	18.0	18.4	18.9	17.5	17.9	18.0	18.4	18.9
	8H	17.4	17.8	17.9	18.3	18.8	17.4	17.8	17.9	18.3	18.8
	12H	17.4	17.6	17.9	18.2	18.7	17.4	17.6	17.9	18.2	18.7
12H	4H	17.6	18.0	18.1	18.4	18.9	17.6	18.0	18.1	18.4	18.9
	6H	17.5	17.8	18.0	18.3	18.8	17.5	17.8	18.0	18.3	18.8
	8H	17.4	17.6	17.9	18.2	18.7	17.4	17.6	17.9	18.2	18.7


<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm: D = 84</b>
------------------------	---------------------------------------------------	---------------------------------------------

<b>C-planes</b>	<b>0°</b>
$\gamma$	<b>Luminance in cd/m<sup>2</sup></b>
45°	18130.7
50°	14769.7
55°	11928.3
60°	5433.8
65°	215.9
70°	0.0
75°	0.0
80°	0.0
85°	0.0

**Photometric test report**

<b>Family</b> <b>Lunis 21</b>	<b>Order number: 51DB17MC91C</b> <b>EAN: 4069025013156</b>	<b>LP number</b> <b>59573_34</b>
----------------------------------	---------------------------------------------------------------	-------------------------------------

**Luminance values in cd/m<sup>2</sup>**       $\gamma$  65°      $\gamma$  70°      $\gamma$  75°      $\gamma$  80°      $\gamma$  85°

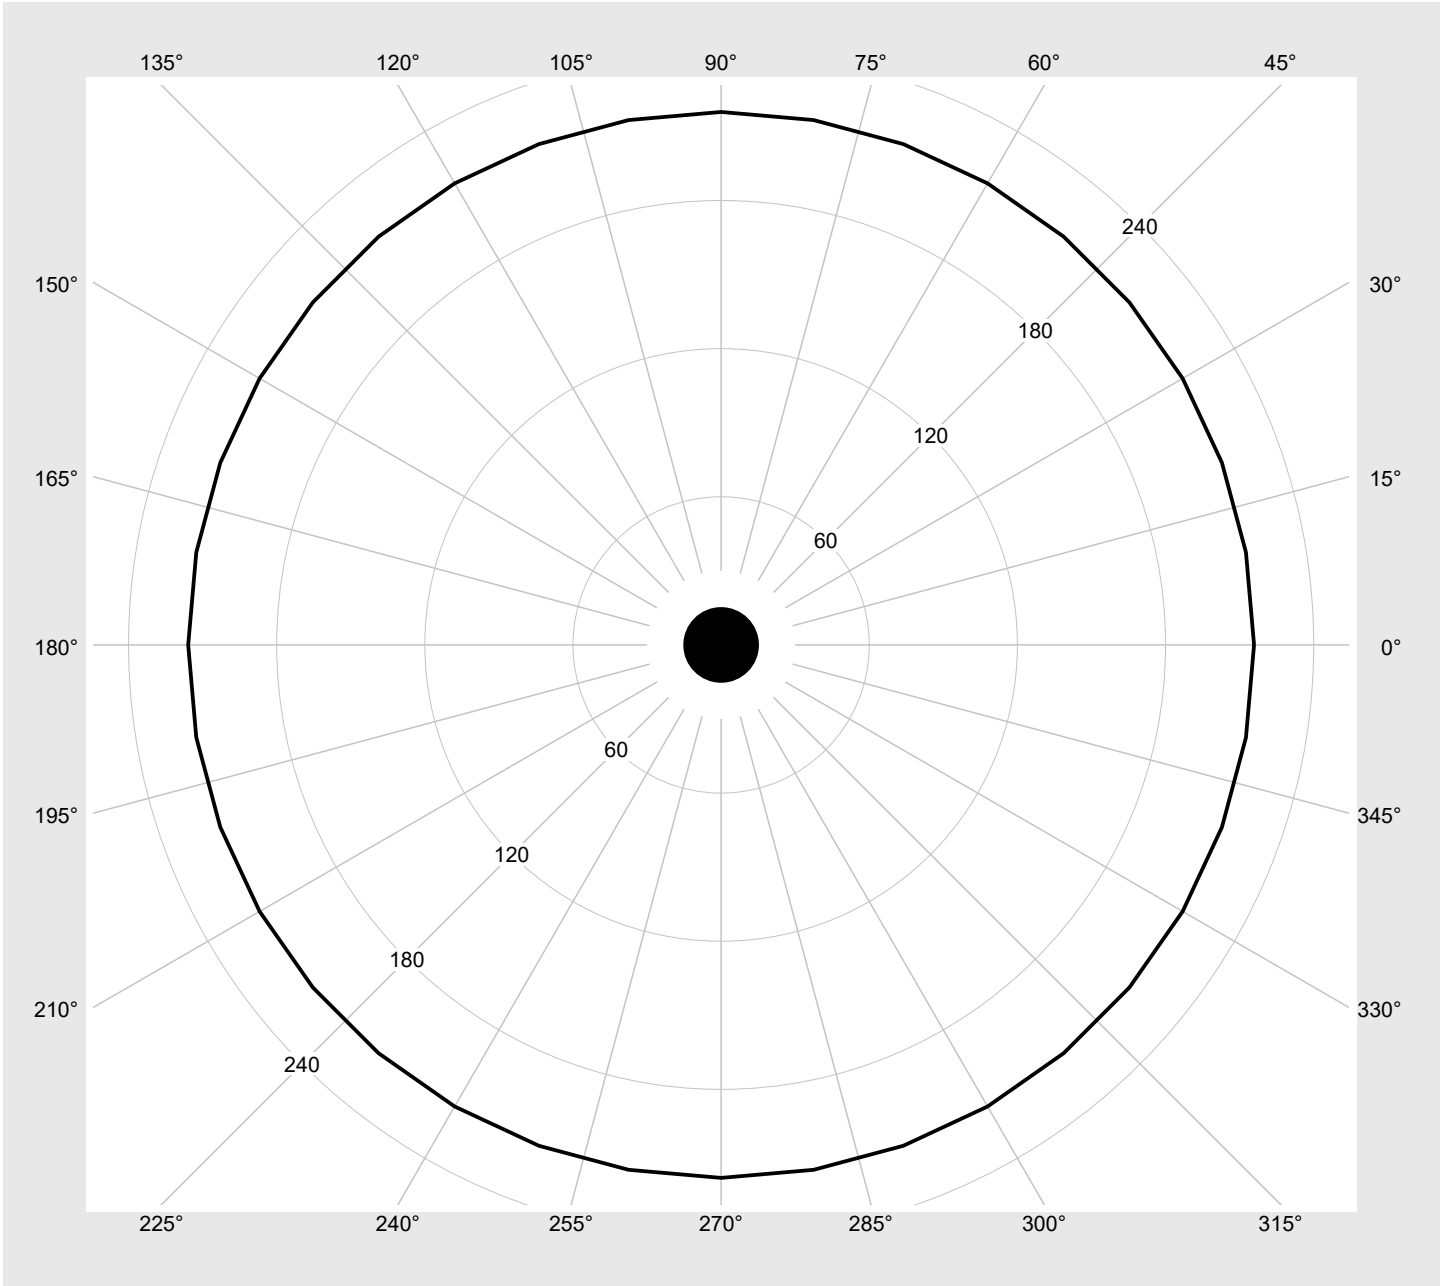

## Photometric test report

Family  
Lunis 21

Order number: 51DB17MC91C  
EAN: 4069025013156

LP number  
59573\_34

## Multilumen Table

environmental temperature: 25°C



DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
12	ON	ON	OFF	OFF	3450	25.5
11	ON	OFF	ON	ON	3180	22.1
10	ON	OFF	ON	OFF	2980	20.6
9	ON	OFF	OFF	ON	2830	19.5
8	ON	OFF	OFF	OFF	2620	18.0
7	OFF	ON	ON	ON	2300	15.7
6	OFF	ON	ON	OFF	2060	13.9
5	OFF	ON	OFF	ON	1840	12.4
4	OFF	ON	OFF	OFF	1570	10.6
3	OFF	OFF	ON	ON	1450	9.7
2	OFF	OFF	ON	OFF	1190	8.0
1	OFF	OFF	OFF	ON	910	6.1
0	OFF	OFF	OFF	OFF	650	4.4