


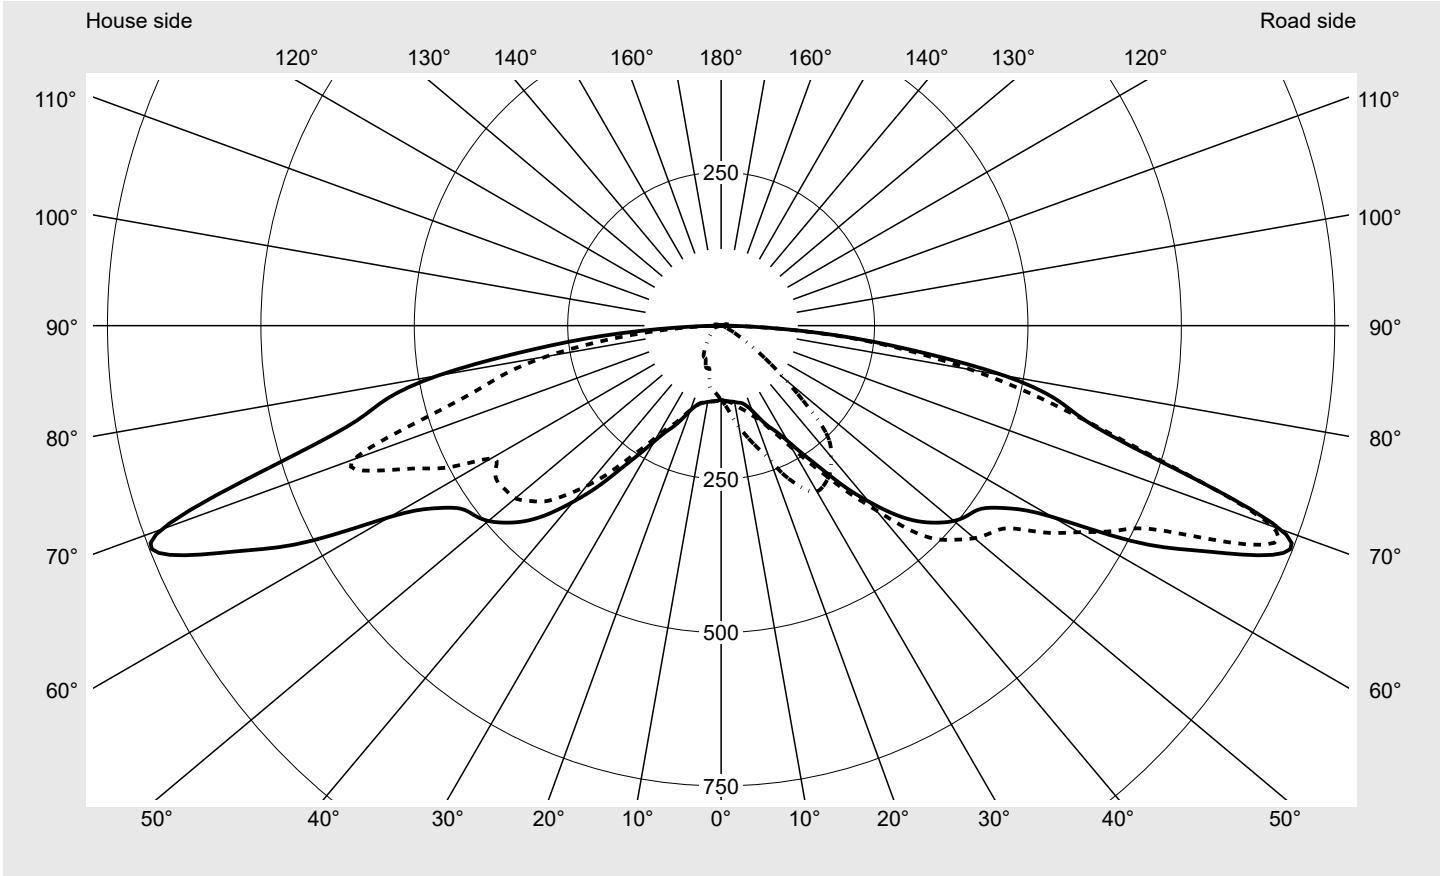
Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2CC1F08GE EAN: 4069025076656	LP number 58290_262
	Version post-top or side-entry mounting Optic asymmetric, extremely wide distribution (P1.0a) Cover transparent, PMMA Lamps LED 4000 K CRI ≥ 70 Controlgear ECG SITECO iQ Setting individual position Rated values Net luminous flux = 3150 lm Power consumption = 20.2 W Luminous efficacy = 155.9 lm/W	serial documentation 25.04.2024





Luminous intensity in cd/klm C180-0 C185-5 C270-90 **Imax: 975 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	970.0
Imax 80°	468.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2CC1F08GE EAN: 4069025076656	LP number 58290_262
--	--	-------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

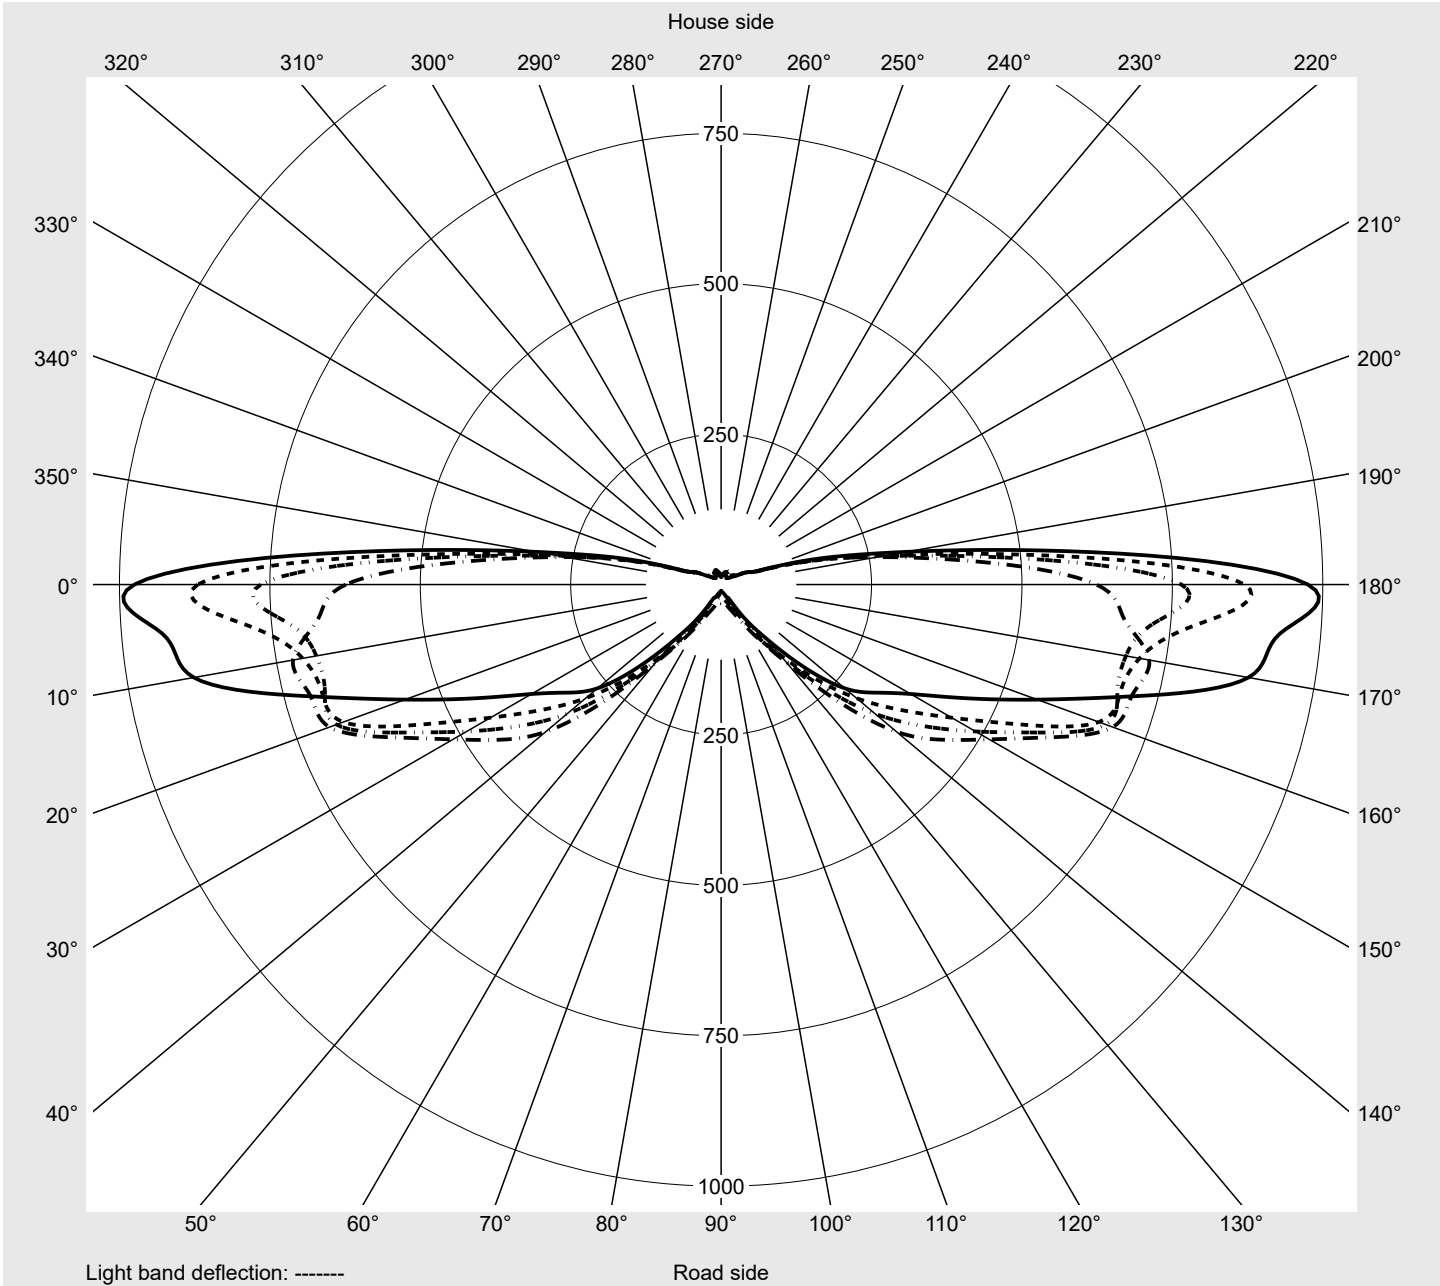

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2CC1F08GE EAN: 4069025076656	LP number 58290_262
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9
2,5°	122.3	122.5	122.6	123.2	123.7	123.4	123.1	123.4	123.7	124.7	125.7	126.5	127.1
5,0°	123.7	124.0	124.3	125.4	126.6	128.2	129.7	130.6	131.5	133.0	134.7	136.1	137.1
7,5°	124.7	126.5	128.8	133.3	138.0	141.2	143.7	145.6	147.0	148.2	149.3	150.9	152.7
10,0°	126.2	130.4	135.0	141.5	147.9	152.4	156.1	159.3	161.9	163.8	165.3	167.1	168.6
12,5°	128.5	136.5	143.9	149.9	155.1	160.1	165.1	170.7	176.1	180.5	184.4	184.5	184.6
15,0°	130.7	142.2	152.4	158.4	163.4	169.3	175.7	182.8	189.8	195.8	201.5	201.5	201.6
17,5°	136.9	149.0	159.7	166.0	171.2	178.3	185.9	193.8	201.6	209.1	215.4	218.9	221.5
20,0°	147.2	157.9	167.8	175.4	182.7	192.3	201.7	209.0	215.6	222.8	229.4	234.3	238.7
22,5°	163.1	166.7	172.6	184.8	199.0	212.3	225.7	228.8	232.4	237.4	242.9	248.6	254.3
25,0°	180.1	183.6	186.3	201.4	216.7	233.0	249.6	250.1	250.6	254.1	257.7	261.5	265.5
27,5°	195.0	202.5	211.1	222.8	234.9	245.6	255.3	263.7	271.6	274.1	276.7	275.9	274.9
30,0°	217.4	229.1	240.4	248.8	256.5	258.7	260.9	276.1	291.2	290.9	290.7	282.9	275.1
32,5°	248.0	261.1	273.7	276.3	278.7	281.0	283.2	296.0	308.8	305.0	301.1	282.5	263.9
35,0°	284.4	299.2	312.1	310.8	309.6	308.8	308.1	317.2	326.4	317.0	303.5	277.7	247.7
37,5°	331.0	344.9	353.9	352.0	350.1	342.1	334.1	331.6	329.1	314.6	295.3	262.0	223.9
40,0°	374.2	392.1	403.9	400.7	397.5	381.6	365.7	351.4	334.7	312.8	284.2	244.3	200.1
42,5°	416.0	448.2	476.1	469.0	461.9	436.1	408.8	377.9	344.2	306.8	268.7	233.2	198.3
45,0°	450.1	491.0	528.9	521.1	513.4	481.0	445.7	402.1	354.4	301.8	253.4	220.1	196.6
47,5°	475.2	516.4	552.2	548.7	545.2	514.2	477.5	425.1	365.1	297.4	237.2	204.4	183.7
50,0°	495.1	538.7	575.9	576.8	577.8	542.1	500.6	443.3	376.5	295.9	223.5	186.9	164.8
52,5°	507.3	554.5	593.7	603.7	613.8	565.0	513.8	459.3	394.8	302.7	215.3	165.9	133.8
55,0°	519.6	575.8	624.0	634.5	645.0	582.4	520.6	465.7	401.7	301.3	203.9	146.6	109.0
57,5°	553.9	627.9	687.7	682.8	677.8	595.6	517.6	457.2	391.1	286.3	185.8	129.4	93.7
60,0°	623.7	673.2	722.6	707.6	692.7	600.9	514.7	449.6	380.6	273.4	171.3	113.5	77.7
62,5°	765.0	724.1	683.2	681.8	680.4	582.0	488.3	410.0	334.1	244.9	162.1	106.3	59.2
65,0°	869.8	788.1	706.3	687.2	668.1	550.6	442.6	362.9	293.8	220.9	152.9	96.0	43.0
67,5°	975.3	932.6	889.9	716.1	559.2	446.8	363.8	313.2	268.3	192.9	118.3	70.4	30.3
70,0°	970.0	955.0	939.9	679.3	458.3	349.5	293.2	261.4	232.0	159.5	86.0	46.9	17.5
72,5°	775.6	781.4	787.2	572.6	358.0	286.7	225.8	200.4	176.6	116.6	57.2	30.5	13.2
75,0°	627.2	632.9	638.6	459.6	280.7	225.1	176.3	151.1	126.7	80.5	28.3	19.1	9.8
77,5°	561.6	521.6	481.7	351.7	241.3	188.8	157.4	120.1	84.9	51.4	18.6	13.2	7.8
80,0°	468.3	413.9	354.0	271.0	194.5	158.4	131.2	85.3	43.2	23.9	11.7	8.7	6.1
82,5°	324.8	303.9	272.2	207.6	132.0	113.5	92.3	60.4	30.7	17.2	8.7	6.6	4.8
85,0°	198.9	192.4	185.9	132.3	78.7	69.1	57.4	37.8	19.3	11.0	5.8	4.5	3.4
87,5°	74.6	72.1	69.7	49.6	29.5	25.9	21.5	14.2	7.2	4.1	2.2	1.7	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2CC1F08GE EAN: 4069025076656	LP number 58290_262
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9
2,5°	127.4	127.7	127.7	127.7	128.0	128.2	122.3	122.3	122.1	121.9	121.9	121.9	121.9
5,0°	137.7	138.1	138.1	138.1	138.3	138.5	123.5	123.4	123.4	123.5	123.6	123.7	123.0
7,5°	153.2	153.7	154.1	154.4	153.8	153.2	124.4	124.2	124.7	125.1	126.8	128.5	125.0
10,0°	169.4	170.0	169.9	169.8	168.9	167.9	125.6	124.9	126.7	128.2	129.0	129.5	125.4
12,5°	186.2	187.7	185.4	183.4	182.4	181.9	128.2	128.0	130.8	133.6	127.8	122.8	120.2
15,0°	203.1	204.5	201.3	198.0	197.7	197.3	131.6	132.5	135.5	138.4	129.3	120.2	118.1
17,5°	221.1	220.7	216.8	212.9	213.1	213.3	137.5	138.1	140.1	142.1	132.7	123.3	131.5
20,0°	237.1	235.3	232.9	230.3	231.6	232.8	146.5	145.8	146.1	146.4	137.0	127.5	145.4
22,5°	251.7	249.2	252.2	255.2	257.7	260.2	159.2	155.9	153.9	152.3	145.2	138.0	144.5
25,0°	262.6	259.7	266.6	272.9	277.9	282.5	174.3	167.8	162.7	156.9	148.6	139.5	137.4
27,5°	273.1	271.1	276.4	282.7	291.9	301.9	188.1	180.5	171.1	159.6	143.2	127.6	120.2
30,0°	273.0	270.9	278.6	287.3	299.1	311.9	208.0	197.1	181.3	162.2	137.9	115.4	103.4
32,5°	258.5	253.1	268.9	284.0	297.3	309.8	235.0	218.3	192.5	162.9	130.4	102.2	88.7
35,0°	241.8	235.9	259.7	280.8	293.6	303.6	266.3	241.9	204.7	163.6	126.6	90.2	79.4
37,5°	221.5	219.2	243.1	264.9	280.3	293.6	305.1	269.2	219.6	166.4	120.4	76.1	69.0
40,0°	201.6	203.2	224.2	244.3	262.0	278.8	341.2	295.9	233.5	168.6	117.3	69.5	62.5
42,5°	194.5	190.6	204.0	219.3	240.4	263.5	374.2	321.6	248.4	174.7	122.4	76.2	62.4
45,0°	183.0	173.7	181.1	188.4	211.6	234.8	404.7	347.2	258.7	171.4	116.1	78.6	58.3
47,5°	166.4	151.9	148.8	145.8	164.0	182.2	422.7	354.8	251.4	153.4	104.1	75.7	55.6
50,0°	143.4	127.0	116.6	108.7	123.0	137.2	437.8	362.3	255.4	136.9	101.6	70.4	51.2
52,5°	109.5	93.2	82.9	75.5	87.9	100.2	441.4	357.0	245.6	123.8	91.0	62.0	44.6
55,0°	83.7	68.1	58.1	51.2	60.7	70.1	444.3	351.7	234.7	108.3	78.5	52.6	38.0
57,5°	69.7	55.1	45.5	38.8	43.2	47.7	435.9	307.2	196.3	88.9	63.7	38.6	31.8
60,0°	55.7	43.7	35.1	29.0	29.8	30.7	432.8	262.8	155.7	69.5	50.0	30.6	27.2
62,5°	45.8	34.2	27.6	22.7	22.4	22.0	499.7	270.6	150.5	66.7	49.5	32.3	26.2
65,0°	33.9	25.8	20.7	17.3	15.0	13.3	550.6	278.5	147.6	63.8	47.3	32.8	24.3
67,5°	23.9	18.3	14.9	12.7	11.3	10.3	617.8	312.8	165.5	70.6	49.4	31.3	22.8
70,0°	15.0	12.6	10.7	9.1	8.4	7.8	636.6	347.2	190.2	77.4	53.8	30.2	23.7
72,5°	11.1	9.3	8.0	7.1	6.5	6.2	514.7	286.9	158.3	62.8	44.8	29.5	21.6
75,0°	8.2	6.8	5.9	5.3	5.0	4.8	416.2	231.8	127.1	49.1	38.4	28.8	22.2
77,5°	6.4	5.2	4.5	4.0	3.9	3.8	359.2	185.2	96.4	36.1	28.9	22.5	18.4
80,0°	4.7	3.9	3.4	2.9	2.9	2.8	288.8	136.8	67.1	24.9	20.6	16.9	14.8
82,5°	3.7	3.0	2.5	2.2	2.0	1.9	201.0	77.2	46.4	15.6	13.8	12.1	11.7
85,0°	2.6	2.1	1.7	1.4	1.2	1.1	116.7	34.5	21.4	8.3	8.0	7.7	8.1
87,5°	1.0	0.8	0.6	0.5	0.5	0.4	43.8	12.9	8.0	3.1	3.0	2.9	3.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2CC1F08GE EAN: 4069025076656	LP number 58290_262
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	0.2	0.2
2,5°	121.8	120.9	120.1	119.4	118.5	117.2	115.8	115.0	114.5	114.5	114.5	1.5	1.6
5,0°	122.2	120.9	119.3	117.4	115.4	113.4	111.6	110.5	109.6	109.5	109.3	3.0	4.6
7,5°	121.7	118.7	115.9	113.2	110.9	109.7	108.9	107.8	106.8	106.3	106.0	4.7	9.3
10,0°	121.2	116.7	112.6	109.6	106.9	106.6	106.2	105.2	104.1	103.3	102.6	6.5	15.9
12,5°	118.6	117.2	115.1	110.4	105.1	100.6	96.6	93.4	90.8	89.2	88.0	8.4	24.3
15,0°	116.0	116.8	117.6	109.1	101.2	94.7	88.9	82.7	77.5	75.0	73.4	10.4	34.7
17,5°	139.7	125.7	112.7	102.6	94.6	89.1	84.7	80.1	75.7	74.2	72.8	12.7	47.4
20,0°	163.4	133.0	107.2	94.3	87.5	82.1	78.6	75.8	73.8	72.8	72.1	15.3	62.7
22,5°	151.0	124.6	101.5	87.2	78.1	72.7	69.9	67.8	66.4	66.1	65.9	17.9	80.6
25,0°	135.4	113.5	93.9	80.5	71.1	65.3	61.1	60.0	58.9	59.3	59.7	20.6	101.1
27,5°	112.9	97.6	82.4	74.1	68.4	63.2	58.5	58.2	57.9	58.1	58.4	23.2	124.3
30,0°	94.4	82.6	72.4	67.5	64.3	60.1	56.0	56.4	56.9	57.0	57.1	25.8	150.2
32,5°	80.6	71.7	64.5	60.2	57.4	55.6	54.2	53.9	53.6	52.6	51.5	28.4	178.6
35,0°	69.6	62.4	57.1	54.0	51.8	51.5	51.1	50.6	49.8	48.1	46.2	31.1	209.7
37,5°	62.1	55.8	49.6	49.0	48.3	47.0	45.4	45.3	45.2	43.0	40.7	33.7	243.4
40,0°	55.7	49.5	43.7	44.0	44.3	42.4	40.5	40.3	40.1	38.0	35.9	36.5	279.9
42,5°	50.5	44.3	40.1	39.7	39.3	37.9	36.4	34.7	33.2	32.4	31.9	40.2	320.1
45,0°	45.5	41.1	36.7	35.9	35.1	34.3	33.1	30.8	28.1	28.2	28.3	43.1	363.3
47,5°	40.8	37.2	33.6	32.5	31.4	31.1	30.9	28.2	25.4	25.3	25.1	44.7	407.9
50,0°	36.2	33.3	30.4	29.6	28.8	29.0	29.2	26.3	23.4	22.8	22.2	46.1	454.0
52,5°	31.0	28.9	26.9	27.4	27.8	28.0	28.1	25.0	22.2	20.7	19.7	46.9	500.9
55,0°	27.2	25.4	23.6	25.1	26.6	26.9	27.2	24.2	21.3	19.3	17.4	47.7	548.7
57,5°	26.0	22.8	20.6	23.0	25.1	26.0	26.6	23.8	21.0	18.3	15.6	48.6	597.2
60,0°	24.0	21.0	18.1	20.9	23.3	24.8	25.9	23.3	20.6	17.2	13.7	49.2	646.5
62,5°	20.9	18.1	16.2	18.7	21.2	21.9	22.5	20.6	18.5	16.0	13.4	49.9	696.3
65,0°	17.8	16.0	14.3	16.7	19.1	19.4	19.8	18.2	16.6	14.7	12.9	50.6	746.9
67,5°	17.5	15.6	13.7	15.6	17.2	18.1	18.7	16.9	15.1	13.7	12.4	52.1	799.0
70,0°	17.3	15.2	13.2	13.9	14.7	15.6	16.4	14.7	13.2	12.2	11.3	50.2	849.2
72,5°	17.4	14.6	13.1	11.9	10.9	11.5	12.1	11.3	10.6	10.1	9.8	41.2	890.4
75,0°	17.5	14.8	13.0	10.6	8.2	8.3	8.4	8.2	8.0	7.7	7.4	33.2	923.6
77,5°	15.5	13.1	11.1	9.0	6.9	6.2	5.6	5.2	5.0	3.9	2.9	27.2	950.8
80,0°	13.3	11.2	9.0	7.2	5.6	4.1	2.8	2.8	2.7	1.5	0.2	21.1	971.9
82,5°	11.3	8.7	6.5	5.1	4.0	2.9	1.9	1.7	1.6	0.9	0.2	15.2	987.1
85,0°	8.4	6.1	4.1	3.2	2.6	1.8	1.1	0.7	0.4	0.3	0.2	9.4	996.5
87,5°	3.1	2.3	1.6	1.2	1.0	0.7	0.4	0.3	0.2	0.2	0.1	3.5	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2CC1F08GE EAN: 4069025076656	LP number 58290_262
--	--	--------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	3150	20.2	20.8	20.5
95	241	252	2989	19.2	19.7	19.4
90	229	250	2840	18.2	18.7	18.4
85	216	248	2679	17.1	17.7	17.4
80	203	246	2518	16.1	16.6	16.4
75	190	243	2356	15.2	15.6	15.4
70	178	241	2207	14.3	14.6	14.4
65	165	238	2046	13.3	13.7	13.5
60	152	235	1885	12.2	12.6	12.4
55	140	232	1736	11.4	11.7	11.6
50	127	229	1575	10.4	10.7	10.6
45	114	225	1414	9.6	9.8	9.7
40	102	221	1265	8.7	8.9	8.8
35	89	216	1104	7.7	7.9	7.8
30	76	210	943	6.8	7.0	6.9
25	63	203	781	5.9	6.0	6.0
20	51	195	632	5.1	5.2	5.2
15	38	184	471	4.0	4.1	4.0