




# Photometric test report

<b>Family</b> <b>Streetlight 11 midi LED</b>	<b>Order number: 5XC3G41E08ME</b> <b>EAN: 4058352584170</b>	<b>LP number</b> <b>58294_341</b>
	<b>Version</b> post-top or side-entry mounting <b>Optic</b> asymmetric, wide distribution with additional light component for rear paths (ST1.2P1.0) <b>Cover</b> transparent, PMMA <b>Lamps</b> LED 4000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 18520 lm Power consumption = 121.7 W Luminous efficacy = 152.2 lm/W	<b>serial documentation</b> <b>14.06.2024</b>





**Luminous intensity in cd/klm** C180-0 C205-25 C210-30 C270-90 **Imax: 514 cd/klm**

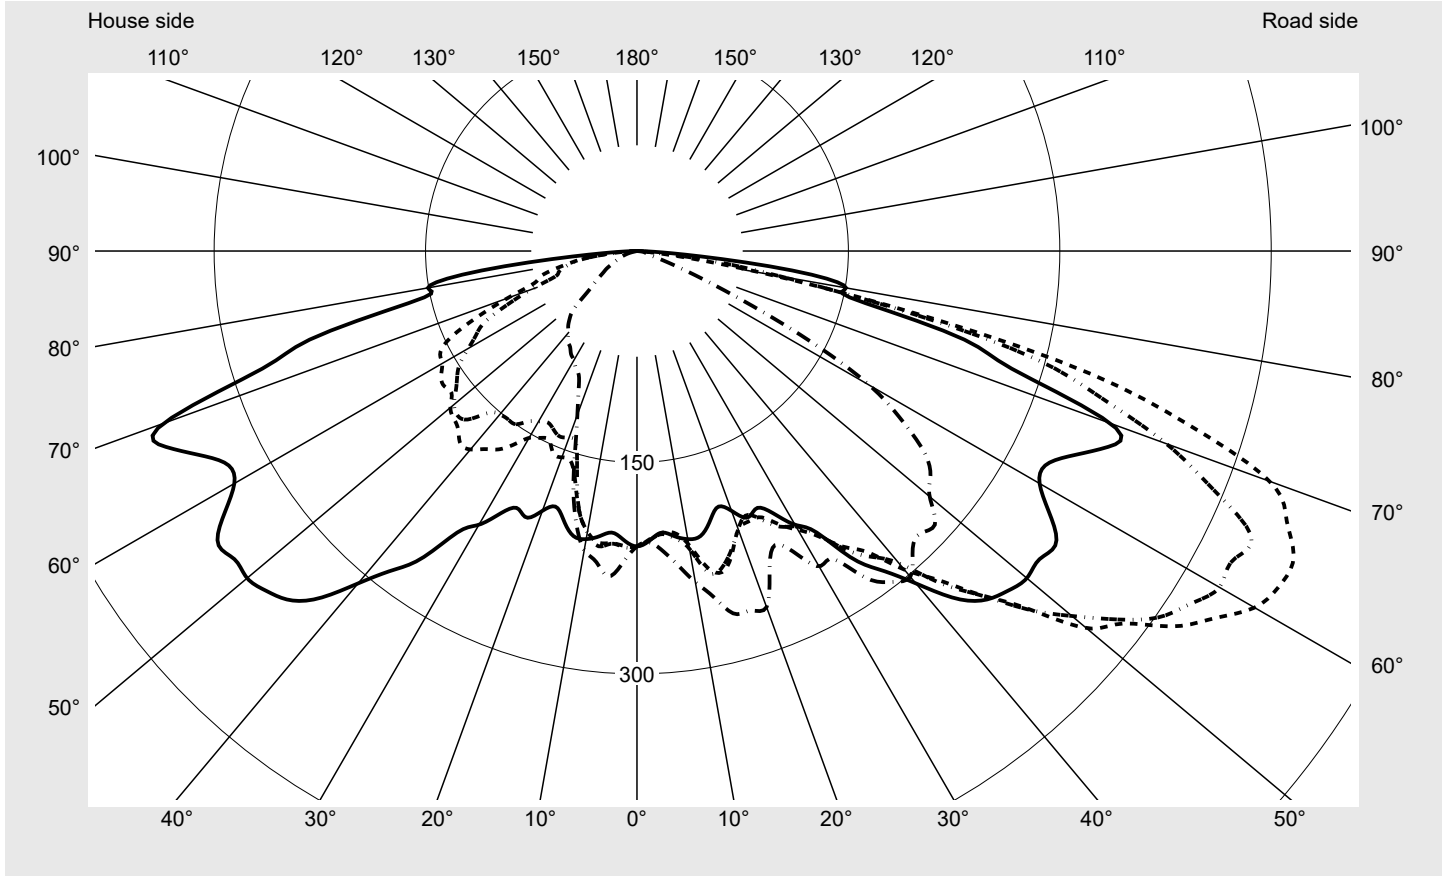

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	


Luminous intensity class acc. to EN13201-2	
Class:	G1
Imax 70°	477.9
Imax 80°	150.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Photometric test report**

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3G41E08ME</b> <b>EAN: 4058352584170</b>	<b>LP number</b> <b>58294_341</b>
--	--	--------------------------------------



**Envelope curve in cd/klm**      **KMK 62.5°**    **KMK 60°**    **KMK 57.5°**    **KMK 55°**

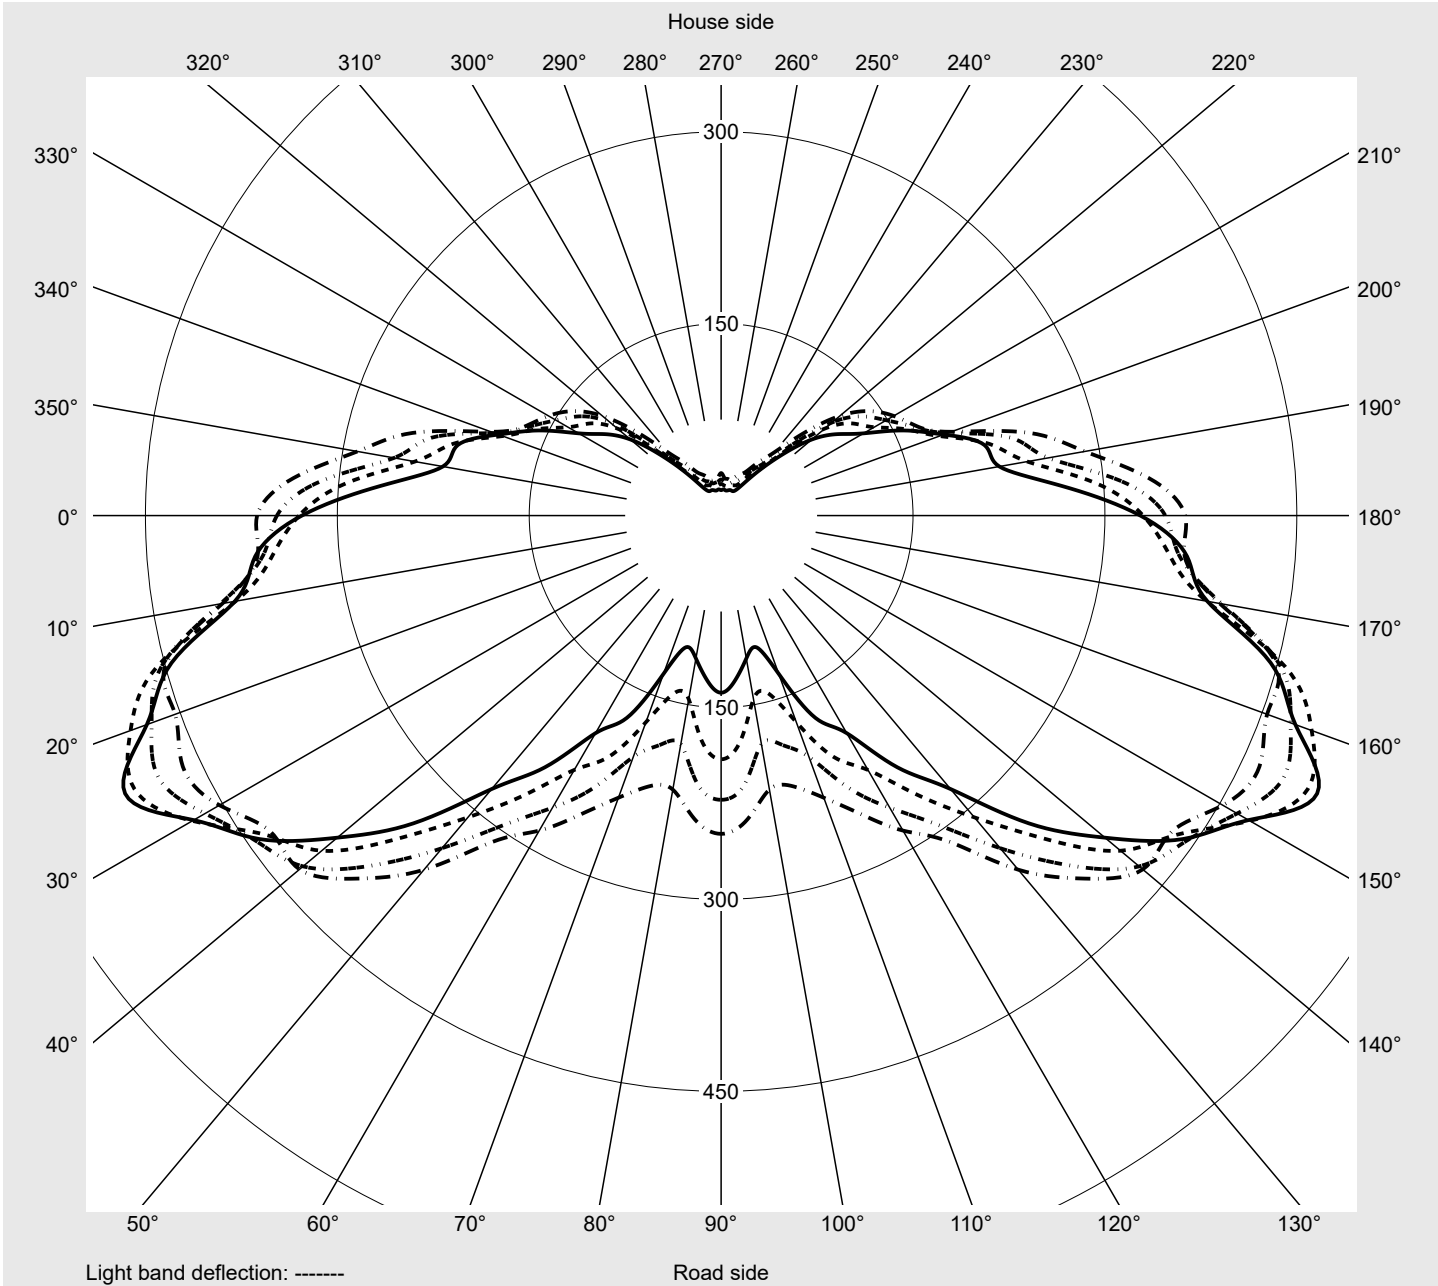

## Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3G41E08ME</b> <b>EAN: 4058352584170</b>	<b>LP number</b> 58294_341
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6
2,5°	205.6	205.7	205.1	204.9	205.0	204.7	205.4	206.0	205.3	204.4	203.8	203.2	203.2
5,0°	200.6	200.0	200.2	201.0	201.0	200.8	201.6	203.7	204.4	207.0	208.6	208.8	209.5
7,5°	204.1	204.0	201.6	200.1	200.5	201.7	205.6	211.5	213.9	215.7	216.6	218.7	220.9
10,0°	207.6	209.2	209.7	209.8	209.4	211.5	214.5	217.2	219.6	222.1	226.6	230.1	232.8
12,5°	207.3	213.8	219.7	222.4	226.4	229.8	233.4	232.9	229.9	232.2	233.3	236.0	235.0
15,0°	199.0	200.3	211.5	229.6	237.5	235.5	232.7	228.6	224.1	226.5	229.3	229.9	235.7
17,5°	190.4	197.3	210.2	222.7	225.6	224.7	222.5	217.1	223.5	219.7	214.6	212.5	217.6
20,0°	196.1	203.0	207.3	214.6	213.8	210.1	210.1	216.7	224.8	216.2	208.8	208.6	214.3
22,5°	204.7	210.2	206.9	215.4	212.0	207.6	202.9	210.8	212.9	212.7	211.4	211.9	212.6
25,0°	201.2	207.7	211.1	218.3	214.4	208.4	210.5	217.3	217.4	220.3	221.0	220.3	222.0
27,5°	210.0	215.2	216.1	218.3	219.0	218.7	220.5	224.0	230.0	232.2	238.2	239.3	248.8
30,0°	224.2	230.6	232.5	231.7	231.8	228.4	225.6	229.7	241.6	250.9	258.1	265.1	275.3
32,5°	236.4	239.9	242.1	243.2	242.8	240.1	238.5	242.0	259.4	270.0	276.8	284.1	289.7
35,0°	266.1	266.9	261.8	256.5	252.6	256.3	258.8	263.1	271.7	283.6	290.8	306.4	310.7
37,5°	285.6	282.4	281.9	272.6	261.9	269.5	273.5	280.9	289.8	295.2	309.0	335.0	331.2
40,0°	307.8	307.6	298.3	291.3	284.3	295.0	289.2	296.4	304.1	319.2	325.8	343.3	347.7
42,5°	334.2	326.4	325.3	318.4	314.5	316.6	320.2	318.3	317.8	333.8	340.8	351.7	353.4
45,0°	349.9	346.2	344.7	343.7	341.8	345.2	345.6	339.4	342.9	358.9	350.5	347.1	349.5
47,5°	356.8	353.9	367.5	388.9	362.0	375.2	376.5	367.6	369.2	367.0	359.1	339.7	345.5
50,0°	361.1	368.7	382.5	428.7	381.0	416.2	402.8	390.6	393.2	377.3	353.6	334.3	323.6
52,5°	359.6	357.8	391.5	430.5	422.3	434.1	429.4	415.4	416.5	391.3	357.8	320.9	299.8
55,0°	362.7	363.8	395.8	449.4	454.2	464.3	452.8	430.3	430.2	401.3	361.3	311.3	284.3
57,5°	347.2	359.5	397.5	452.4	473.7	485.1	465.8	443.6	426.6	387.0	339.4	294.9	263.7
60,0°	329.9	351.7	385.3	456.5	491.3	506.0	477.3	434.9	407.6	357.1	307.9	266.0	229.6
62,5°	327.7	365.6	386.0	444.8	477.7	514.1	476.0	440.8	391.7	340.2	279.0	240.2	196.4
65,0°	342.5	392.5	389.2	425.5	456.9	514.1	481.3	416.2	364.1	317.6	257.1	222.8	161.8
67,5°	362.5	436.1	382.5	401.8	447.8	498.9	442.9	393.8	331.6	288.5	228.0	195.2	143.3
70,0°	357.4	420.3	359.9	368.3	453.9	477.9	399.8	347.8	309.6	257.3	197.9	158.9	124.3
72,5°	280.3	372.1	312.1	330.4	401.3	410.8	344.5	287.0	267.7	217.5	167.3	129.5	110.8
75,0°	237.1	318.5	240.6	282.1	301.1	327.3	288.7	220.4	187.0	164.0	134.5	116.5	98.1
77,5°	158.0	221.9	166.9	207.0	172.4	196.4	186.9	147.0	122.7	116.0	90.3	82.7	70.0
80,0°	150.6	123.0	102.1	123.8	86.4	93.9	102.8	105.1	85.9	78.7	44.1	38.5	30.3
82,5°	120.2	63.8	40.9	40.4	26.6	34.2	53.9	70.5	52.4	35.3	21.3	16.9	11.9
85,0°	49.4	23.6	13.4	9.2	7.5	9.3	11.5	16.7	14.6	10.6	10.4	8.0	6.3
87,5°	11.8	8.1	5.5	4.8	4.2	4.6	4.8	5.1	5.3	4.8	4.2	4.0	3.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

# Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3G41E08ME</b> <b>EAN: 4058352584170</b>	<b>LP number</b> <b>58294_341</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>



C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6
2,5°	203.1	203.0	204.6	205.3	206.0	206.9	205.5	206.6	207.7	208.7	209.5	210.3	210.8
5,0°	209.5	210.0	210.5	212.3	214.2	213.9	201.5	202.7	202.5	204.3	208.1	208.4	207.5
7,5°	222.3	225.1	226.3	226.7	226.6	225.1	204.0	203.4	204.4	205.7	208.7	211.2	210.9
10,0°	232.0	231.2	232.4	233.6	235.5	238.6	202.7	201.4	201.3	202.7	202.3	202.6	205.2
12,5°	238.9	241.7	245.2	248.7	252.4	251.4	199.3	198.0	192.9	190.6	189.2	189.1	189.2
15,0°	236.9	243.3	249.4	258.1	262.3	266.4	194.4	191.9	184.6	178.8	169.3	164.2	160.6
17,5°	229.2	238.9	247.9	257.1	263.7	267.5	189.4	185.9	180.3	171.1	156.3	143.4	139.0
20,0°	221.0	231.2	243.0	255.2	265.6	268.8	191.0	182.0	174.2	167.5	155.8	140.7	134.8
22,5°	221.6	232.4	245.3	250.3	249.5	245.8	191.4	178.6	167.4	160.1	155.3	142.5	129.7
25,0°	228.0	237.5	241.9	238.9	237.8	230.6	192.1	174.4	168.7	155.9	147.8	139.9	126.5
27,5°	249.4	250.2	249.0	248.4	241.2	240.7	196.6	184.1	170.0	160.9	149.5	137.1	126.3
30,0°	274.3	269.2	254.3	256.1	254.8	258.3	216.4	204.4	186.6	170.7	153.1	139.5	127.1
32,5°	284.4	271.3	265.0	270.9	265.3	259.0	230.9	220.2	200.6	179.6	162.9	143.3	130.1
35,0°	305.2	293.7	290.6	292.2	285.6	283.0	265.8	250.6	220.5	193.1	171.9	150.0	132.3
37,5°	319.7	309.7	294.0	286.7	287.8	296.0	285.3	272.2	235.5	205.4	177.1	150.4	133.1
40,0°	337.7	321.9	291.1	275.9	284.7	301.7	313.3	292.7	247.2	217.3	183.8	151.3	139.1
42,5°	348.9	316.1	291.3	275.9	286.3	289.4	326.8	308.0	255.6	226.7	185.4	155.6	143.3
45,0°	352.6	315.7	285.9	274.4	284.0	283.7	347.3	328.5	269.4	236.2	179.4	168.9	149.4
47,5°	346.6	306.7	270.7	272.1	287.2	286.8	361.2	325.8	276.9	229.4	176.2	172.7	157.7
50,0°	323.6	284.0	254.7	255.4	280.5	271.1	358.8	318.5	269.0	216.6	172.8	169.4	157.1
52,5°	288.6	264.3	237.6	247.2	255.4	262.4	346.6	305.4	258.6	200.4	165.8	161.9	149.4
55,0°	257.2	234.7	219.2	217.5	238.2	248.8	335.7	288.7	249.7	191.5	167.0	155.8	142.3
57,5°	234.4	200.7	185.7	181.4	210.8	222.2	313.1	259.6	234.8	188.7	164.8	149.0	135.2
60,0°	208.2	171.9	144.2	145.7	176.3	190.5	293.5	243.1	216.8	181.7	159.6	138.1	125.5
62,5°	174.5	131.7	106.6	113.4	128.8	138.5	266.9	220.9	213.1	185.2	157.4	128.5	111.0
65,0°	137.2	94.0	76.8	79.0	87.3	81.9	252.2	222.4	206.5	180.2	146.4	119.0	100.4
67,5°	107.2	66.9	52.5	43.4	43.5	43.9	242.0	221.7	206.9	161.7	123.0	99.6	85.2
70,0°	90.4	52.1	32.8	21.8	21.0	21.8	214.0	256.9	208.7	129.3	97.7	80.3	74.0
72,5°	76.2	30.7	18.8	12.2	11.0	10.5	204.4	243.7	153.8	99.0	76.8	61.5	58.7
75,0°	60.2	19.9	12.8	9.5	8.5	8.3	180.0	179.3	126.0	89.8	71.5	57.5	49.9
77,5°	25.1	13.9	9.2	7.5	7.0	6.6	142.6	126.0	117.7	76.6	60.8	52.4	41.5
80,0°	13.4	9.4	6.7	5.7	5.4	5.4	107.1	124.7	99.0	59.9	47.4	45.6	27.2
82,5°	8.6	6.4	4.8	4.1	4.1	4.3	61.7	98.1	69.3	43.9	35.9	33.0	21.7
85,0°	5.2	4.0	3.0	2.6	2.2	2.2	35.4	45.5	27.0	19.3	18.2	15.9	11.8
87,5°	2.9	2.2	1.6	1.3	1.0	1.0	11.6	11.8	8.3	5.6	5.7	5.8	3.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3G41E08ME</b> <b>EAN: 4058352584170</b>	<b>LP number</b> 58294_341
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeCO</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	0.3	0.3
2,5°	212.0	213.1	214.4	216.5	219.1	220.0	220.3	220.4	221.1	221.3	220.8	2.5	2.8
5,0°	207.3	208.6	210.0	212.4	215.2	220.1	224.3	228.1	230.5	232.3	231.7	5.0	7.8
7,5°	207.1	207.6	207.9	208.0	210.6	214.3	217.8	219.4	220.6	222.9	222.3	7.6	15.4
10,0°	201.9	197.4	196.1	197.8	200.7	203.1	205.8	209.1	213.9	215.2	215.6	10.1	25.6
12,5°	188.7	186.8	187.2	188.9	189.0	192.0	194.9	202.2	202.9	199.9	198.5	12.7	38.2
15,0°	163.2	166.1	166.8	168.0	167.6	169.0	171.8	175.5	177.6	177.5	174.3	14.5	52.7
17,5°	142.4	145.3	148.6	146.6	142.2	141.3	142.5	140.5	139.6	141.9	145.2	15.7	68.4
20,0°	132.1	133.9	136.1	131.7	126.2	120.3	118.7	117.2	119.3	123.0	123.6	17.1	85.4
22,5°	121.6	123.3	127.5	122.6	117.2	111.3	108.1	104.4	104.1	105.1	108.4	18.6	104.0
25,0°	116.4	116.4	122.3	114.9	111.8	108.8	104.8	99.9	98.0	96.3	97.5	20.4	124.4
27,5°	113.5	110.4	106.0	104.2	104.7	100.3	99.3	95.7	92.3	93.2	93.9	22.8	147.2
30,0°	118.2	110.9	106.7	103.5	94.1	91.0	88.4	87.2	88.7	89.6	89.4	25.8	173.0
32,5°	121.5	114.0	109.5	100.2	88.8	83.6	80.0	80.0	84.3	86.3	87.0	28.8	201.9
35,0°	128.0	116.1	107.5	90.6	81.0	75.6	72.2	73.3	78.1	83.0	82.8	32.7	234.6
37,5°	127.5	116.2	104.9	90.3	73.2	71.2	67.5	68.7	74.1	79.7	80.7	36.1	270.7
40,0°	131.4	114.2	99.6	87.6	68.0	64.4	63.9	66.0	70.0	75.2	75.7	39.6	310.3
42,5°	134.7	114.2	96.0	77.4	69.2	62.4	60.4	61.5	65.2	69.3	72.3	43.1	353.4
45,0°	137.7	114.0	90.2	69.6	65.6	62.2	54.8	55.1	57.7	63.4	67.4	46.5	400.0
47,5°	135.7	108.6	82.1	66.4	62.0	58.8	49.4	45.7	48.7	56.3	60.7	49.4	449.4
50,0°	128.4	106.2	77.5	63.1	56.8	52.0	46.1	38.7	40.5	45.7	47.2	51.3	500.6
52,5°	126.2	101.8	73.6	57.3	47.5	43.0	38.5	34.1	34.3	36.5	39.1	52.3	552.9
55,0°	121.3	90.9	64.3	50.8	40.1	35.5	32.1	28.8	29.1	29.6	33.2	53.2	606.0
57,5°	113.2	77.9	54.8	44.2	35.4	30.0	28.4	26.1	26.1	26.7	28.2	52.6	658.6
60,0°	105.8	72.5	47.5	38.0	29.4	26.0	25.2	23.4	23.3	23.8	24.7	51.0	709.6
62,5°	92.5	67.2	45.6	30.4	23.1	21.1	21.2	20.4	20.0	20.6	19.9	49.0	758.6
65,0°	79.4	59.7	44.2	23.4	17.5	17.2	17.8	16.9	17.4	17.0	16.6	46.9	805.5
67,5°	69.4	52.0	33.4	16.8	12.4	12.9	14.2	13.4	14.0	14.0	13.3	44.2	849.8
70,0°	61.2	45.1	26.0	12.9	9.9	9.5	10.2	10.0	10.9	11.8	11.2	41.0	890.8
72,5°	54.5	37.0	17.5	9.7	7.6	7.4	7.3	7.4	7.9	9.1	8.6	35.2	926.1
75,0°	37.2	22.5	10.7	7.7	6.2	6.0	5.5	5.7	5.5	6.1	6.1	28.7	954.8
77,5°	24.6	13.7	8.0	6.1	4.8	4.3	4.0	3.9	3.0	2.8	2.6	20.1	974.8
80,0°	17.5	8.2	5.8	4.7	3.7	3.1	2.8	2.2	1.3	0.9	0.7	13.3	988.1
82,5°	13.4	6.6	4.4	3.5	2.9	2.2	1.8	1.6	0.9	0.4	0.5	7.7	995.8
85,0°	6.1	3.6	3.0	2.3	2.0	1.6	1.0	0.8	0.6	0.3	0.3	3.1	998.9
87,5°	2.8	2.2	1.6	1.3	1.1	0.9	0.7	0.6	0.4	0.3	0.3	1.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3G41E08ME</b> <b>EAN: 4058352584170</b>	<b>LP number</b> <b>58294_341</b>
--	--	--------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	18520	121.7	129.0	125.4
95	241	252	17572	114.2	121.1	117.6
90	229	250	16697	107.6	114.0	110.8
85	216	248	15749	100.5	106.4	103.4
80	203	246	14801	93.6	99.1	96.4
75	190	243	13854	86.9	92.0	89.4
70	178	241	12979	80.8	85.6	83.2
65	165	238	12031	74.4	78.7	76.6
60	152	235	11083	68.1	72.0	70.0
55	140	232	10208	62.3	65.9	64.1
50	127	229	9260	56.2	59.4	57.8
45	114	225	8312	50.1	53.0	51.6
40	102	221	7437	44.6	47.1	45.8
35	89	216	6489	38.8	40.9	39.8
30	76	210	5541	33.1	34.9	34.0
25	63	203	4594	27.4	28.9	28.2
20	51	195	3719	22.3	23.5	22.9
15	38	184	2771	17.0	17.8	17.4
13	34	180	2479	15.3	16.1	15.7