


Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C51E08GE EAN: 4058352583739	LP number 58290_302
	Version post-top or side-entry mounting Optic asymmetric, extremely wide distribution (P1.0a) Cover transparent, PMMA Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 3030 lm Power consumption = 19.4 W Luminous efficacy = 156.2 lm/W	serial documentation 17.06.2024





Luminous intensity in cd/klm C180-0 C185-5 C270-90 **Imax: 975 cd/klm**

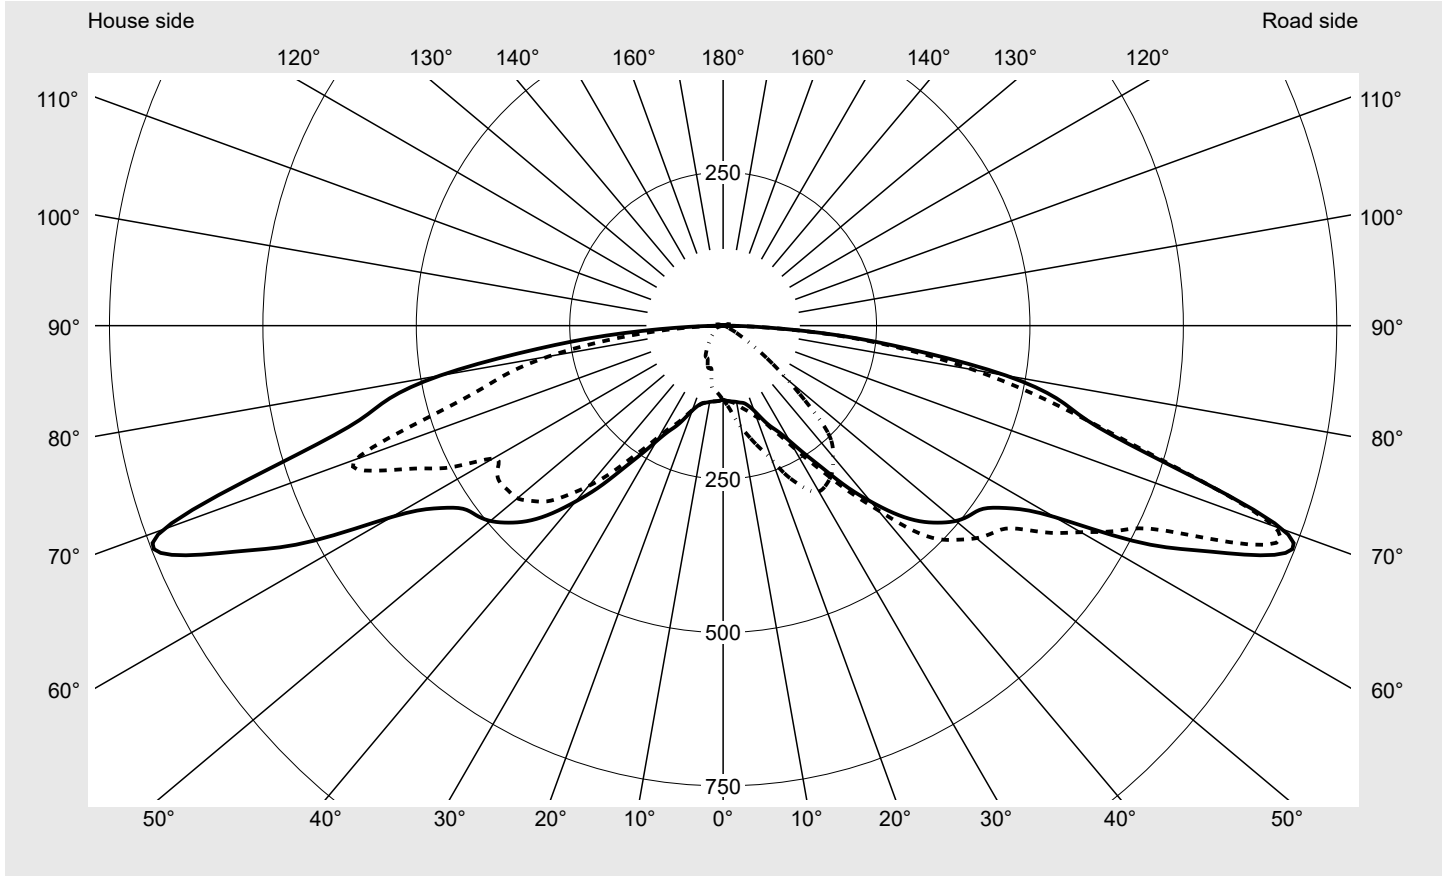

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	970.0
Imax 80°	468.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C51E08GE EAN: 4058352583739	LP number 58290_302
------------------------------------------	----------------------------------------------------------------	-------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

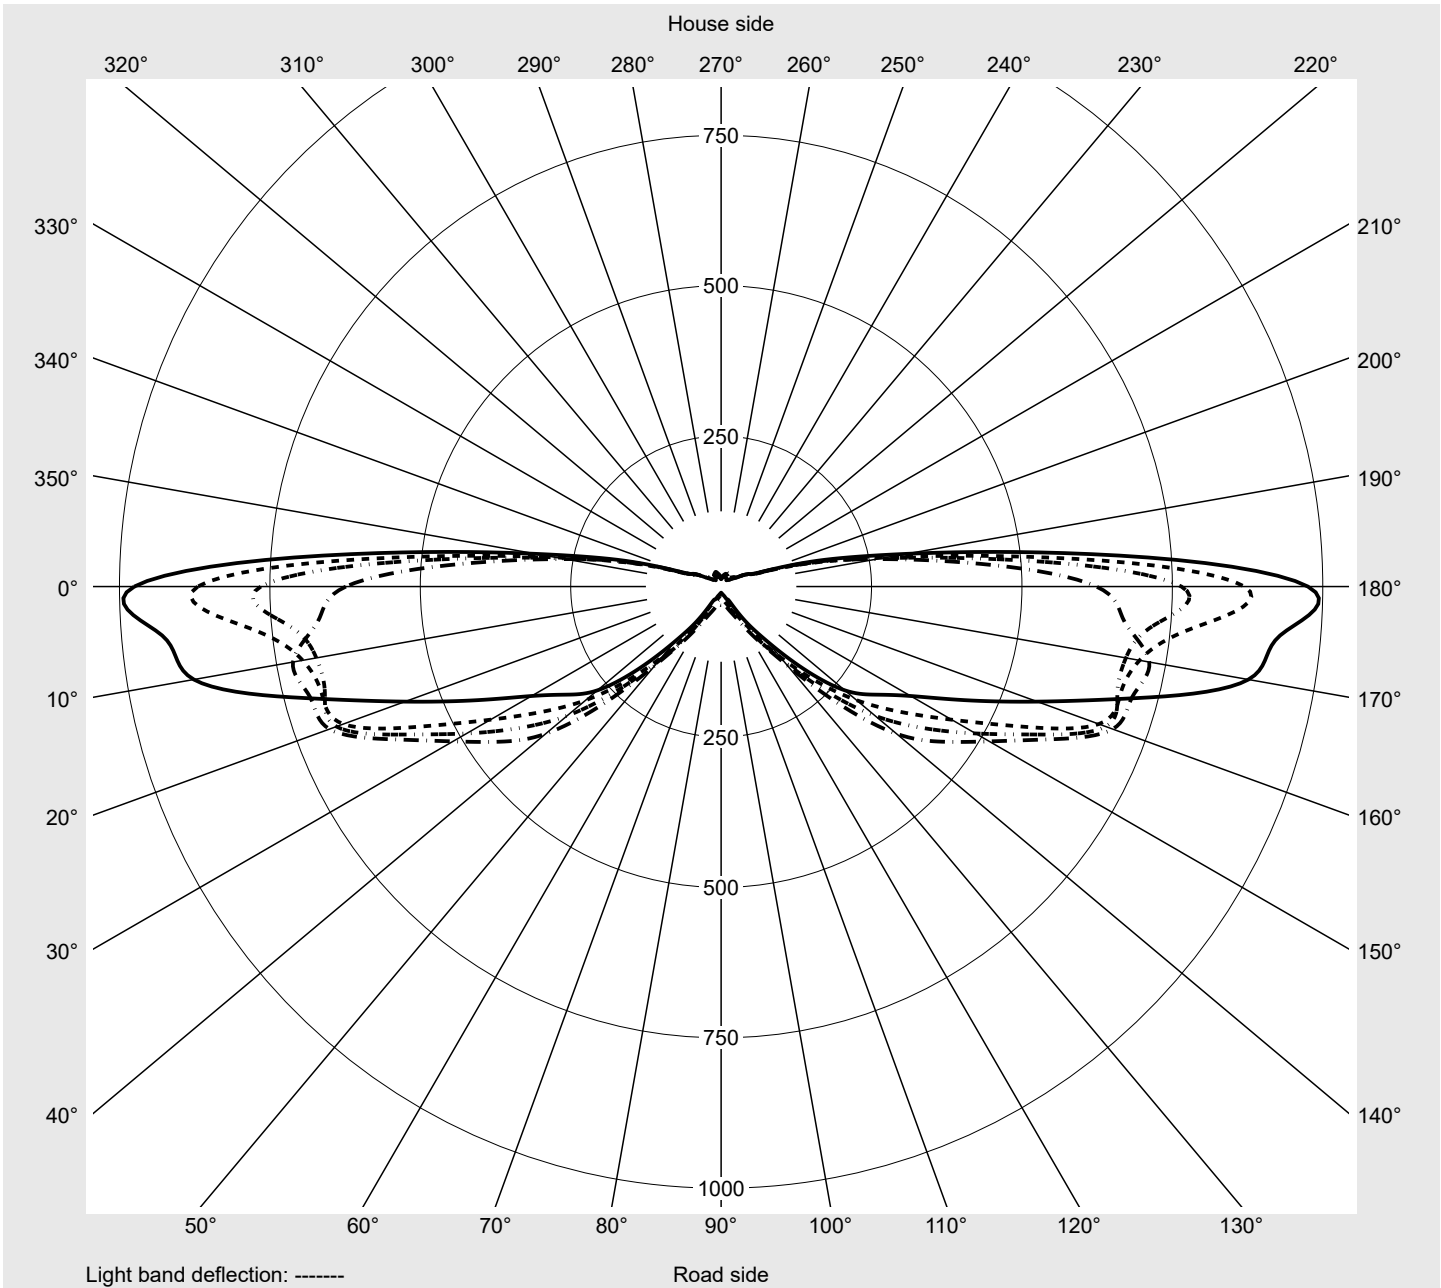

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C51E08GE EAN: 4058352583739	LP number 58290_302
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9
2,5°	122.3	122.5	122.6	123.2	123.7	123.4	123.1	123.4	123.7	124.7	125.7	126.5	127.1
5,0°	123.7	124.0	124.3	125.4	126.6	128.2	129.7	130.6	131.5	133.0	134.7	136.1	137.1
7,5°	124.7	126.5	128.8	133.3	138.0	141.2	143.7	145.6	147.0	148.2	149.3	150.9	152.7
10,0°	126.2	130.4	135.0	141.5	147.9	152.4	156.1	159.3	161.9	163.8	165.3	167.1	168.6
12,5°	128.5	136.5	143.9	149.9	155.1	160.1	165.1	170.7	176.1	180.5	184.4	184.5	184.6
15,0°	130.7	142.2	152.4	158.4	163.4	169.3	175.7	182.8	189.8	195.8	201.5	201.5	201.6
17,5°	136.9	149.0	159.7	166.0	171.2	178.3	185.9	193.8	201.6	209.1	215.4	218.9	221.5
20,0°	147.2	157.9	167.8	175.4	182.7	192.3	201.7	209.0	215.6	222.8	229.4	234.3	238.7
22,5°	163.1	166.7	172.6	184.8	199.0	212.3	225.7	228.8	232.4	237.4	242.9	248.6	254.3
25,0°	180.1	183.6	186.3	201.4	216.7	233.0	249.6	250.1	250.6	254.1	257.7	261.5	265.5
27,5°	195.0	202.5	211.1	222.8	234.9	245.6	255.3	263.7	271.6	274.1	276.7	275.9	274.9
30,0°	217.4	229.1	240.4	248.8	256.5	258.7	260.9	276.1	291.2	290.9	290.7	282.9	275.1
32,5°	248.0	261.1	273.7	276.3	278.7	281.0	283.2	296.0	308.8	305.0	301.1	282.5	263.9
35,0°	284.4	299.2	312.1	310.8	309.6	308.8	308.1	317.2	326.4	317.0	303.5	277.7	247.7
37,5°	331.0	344.9	353.9	352.0	350.1	342.1	334.1	331.6	329.1	314.6	295.3	262.0	223.9
40,0°	374.2	392.1	403.9	400.7	397.5	381.6	365.7	351.4	334.7	312.8	284.2	244.3	200.1
42,5°	416.0	448.2	476.1	469.0	461.9	436.1	408.8	377.9	344.2	306.8	268.7	233.2	198.3
45,0°	450.1	491.0	528.9	521.1	513.4	481.0	445.7	402.1	354.4	301.8	253.4	220.1	196.6
47,5°	475.2	516.4	552.2	548.7	545.2	514.2	477.5	425.1	365.1	297.4	237.2	204.4	183.7
50,0°	495.1	538.7	575.9	576.8	577.8	542.1	500.6	443.3	376.5	295.9	223.5	186.9	164.8
52,5°	507.3	554.5	593.7	603.7	613.8	565.0	513.8	459.3	394.8	302.7	215.3	165.9	133.8
55,0°	519.6	575.8	624.0	634.5	645.0	582.4	520.6	465.7	401.7	301.3	203.9	146.6	109.0
57,5°	553.9	627.9	687.7	682.8	677.8	595.6	517.6	457.2	391.1	286.3	185.8	129.4	93.7
60,0°	623.7	673.2	722.6	707.6	692.7	600.9	514.7	449.6	380.6	273.4	171.3	113.5	77.7
62,5°	765.0	724.1	683.2	681.8	680.4	582.0	488.3	410.0	334.1	244.9	162.1	106.3	59.2
65,0°	869.8	788.1	706.3	687.2	668.1	550.6	442.6	362.9	293.8	220.9	152.9	96.0	43.0
67,5°	975.3	932.6	889.9	716.1	559.2	446.8	363.8	313.2	268.3	192.9	118.3	70.4	30.3
70,0°	970.0	955.0	939.9	679.3	458.3	349.5	293.2	261.4	232.0	159.5	86.0	46.9	17.5
72,5°	775.6	781.4	787.2	572.6	358.0	286.7	225.8	200.4	176.6	116.6	57.2	30.5	13.2
75,0°	627.2	632.9	638.6	459.6	280.7	225.1	176.3	151.1	126.7	80.5	28.3	19.1	9.8
77,5°	561.6	521.6	481.7	351.7	241.3	188.8	157.4	120.1	84.9	51.4	18.6	13.2	7.8
80,0°	468.3	413.9	354.0	271.0	194.5	158.4	131.2	85.3	43.2	23.9	11.7	8.7	6.1
82,5°	324.8	303.9	272.2	207.6	132.0	113.5	92.3	60.4	30.7	17.2	8.7	6.6	4.8
85,0°	198.9	192.4	185.9	132.3	78.7	69.1	57.4	37.8	19.3	11.0	5.8	4.5	3.4
87,5°	74.6	72.1	69.7	49.6	29.5	25.9	21.5	14.2	7.2	4.1	2.2	1.7	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C51E08GE EAN: 4058352583739	LP number 58290_302
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9
2,5°	127.4	127.7	127.7	127.7	128.0	128.2	122.3	122.3	122.1	121.9	121.9	121.9	121.9
5,0°	137.7	138.1	138.1	138.1	138.3	138.5	123.5	123.4	123.4	123.5	123.6	123.7	123.0
7,5°	153.2	153.7	154.1	154.4	153.8	153.2	124.4	124.2	124.7	125.1	126.8	128.5	125.0
10,0°	169.4	170.0	169.9	169.8	168.9	167.9	125.6	124.9	126.7	128.2	129.0	129.5	125.4
12,5°	186.2	187.7	185.4	183.4	182.4	181.9	128.2	128.0	130.8	133.6	127.8	122.8	120.2
15,0°	203.1	204.5	201.3	198.0	197.7	197.3	131.6	132.5	135.5	138.4	129.3	120.2	118.1
17,5°	221.1	220.7	216.8	212.9	213.1	213.3	137.5	138.1	140.1	142.1	132.7	123.3	131.5
20,0°	237.1	235.3	232.9	230.3	231.6	232.8	146.5	145.8	146.1	146.4	137.0	127.5	145.4
22,5°	251.7	249.2	252.2	255.2	257.7	260.2	159.2	155.9	153.9	152.3	145.2	138.0	144.5
25,0°	262.6	259.7	266.6	272.9	277.9	282.5	174.3	167.8	162.7	156.9	148.6	139.5	137.4
27,5°	273.1	271.1	276.4	282.7	291.9	301.9	188.1	180.5	171.1	159.6	143.2	127.6	120.2
30,0°	273.0	270.9	278.6	287.3	299.1	311.9	208.0	197.1	181.3	162.2	137.9	115.4	103.4
32,5°	258.5	253.1	268.9	284.0	297.3	309.8	235.0	218.3	192.5	162.9	130.4	102.2	88.7
35,0°	241.8	235.9	259.7	280.8	293.6	303.6	266.3	241.9	204.7	163.6	126.6	90.2	79.4
37,5°	221.5	219.2	243.1	264.9	280.3	293.6	305.1	269.2	219.6	166.4	120.4	76.1	69.0
40,0°	201.6	203.2	224.2	244.3	262.0	278.8	341.2	295.9	233.5	168.6	117.3	69.5	62.5
42,5°	194.5	190.6	204.0	219.3	240.4	263.5	374.2	321.6	248.4	174.7	122.4	76.2	62.4
45,0°	183.0	173.7	181.1	188.4	211.6	234.8	404.7	347.2	258.7	171.4	116.1	78.6	58.3
47,5°	166.4	151.9	148.8	145.8	164.0	182.2	422.7	354.8	251.4	153.4	104.1	75.7	55.6
50,0°	143.4	127.0	116.6	108.7	123.0	137.2	437.8	362.3	255.4	136.9	101.6	70.4	51.2
52,5°	109.5	93.2	82.9	75.5	87.9	100.2	441.4	357.0	245.6	123.8	91.0	62.0	44.6
55,0°	83.7	68.1	58.1	51.2	60.7	70.1	444.3	351.7	234.7	108.3	78.5	52.6	38.0
57,5°	69.7	55.1	45.5	38.8	43.2	47.7	435.9	307.2	196.3	88.9	63.7	38.6	31.8
60,0°	55.7	43.7	35.1	29.0	29.8	30.7	432.8	262.8	155.7	69.5	50.0	30.6	27.2
62,5°	45.8	34.2	27.6	22.7	22.4	22.0	499.7	270.6	150.5	66.7	49.5	32.3	26.2
65,0°	33.9	25.8	20.7	17.3	15.0	13.3	550.6	278.5	147.6	63.8	47.3	32.8	24.3
67,5°	23.9	18.3	14.9	12.7	11.3	10.3	617.8	312.8	165.5	70.6	49.4	31.3	22.8
70,0°	15.0	12.6	10.7	9.1	8.4	7.8	636.6	347.2	190.2	77.4	53.8	30.2	23.7
72,5°	11.1	9.3	8.0	7.1	6.5	6.2	514.7	286.9	158.3	62.8	44.8	29.5	21.6
75,0°	8.2	6.8	5.9	5.3	5.0	4.8	416.2	231.8	127.1	49.1	38.4	28.8	22.2
77,5°	6.4	5.2	4.5	4.0	3.9	3.8	359.2	185.2	96.4	36.1	28.9	22.5	18.4
80,0°	4.7	3.9	3.4	2.9	2.9	2.8	288.8	136.8	67.1	24.9	20.6	16.9	14.8
82,5°	3.7	3.0	2.5	2.2	2.0	1.9	201.0	77.2	46.4	15.6	13.8	12.1	11.7
85,0°	2.6	2.1	1.7	1.4	1.2	1.1	116.7	34.5	21.4	8.3	8.0	7.7	8.1
87,5°	1.0	0.8	0.6	0.5	0.5	0.4	43.8	12.9	8.0	3.1	3.0	2.9	3.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C51E08GE EAN: 4058352583739	LP number 58290_302
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	0.2	0.2
2,5°	121.8	120.9	120.1	119.4	118.5	117.2	115.8	115.0	114.5	114.5	114.5	1.5	1.6
5,0°	122.2	120.9	119.3	117.4	115.4	113.4	111.6	110.5	109.6	109.5	109.3	3.0	4.6
7,5°	121.7	118.7	115.9	113.2	110.9	109.7	108.9	107.8	106.8	106.3	106.0	4.7	9.3
10,0°	121.2	116.7	112.6	109.6	106.9	106.6	106.2	105.2	104.1	103.3	102.6	6.5	15.9
12,5°	118.6	117.2	115.1	110.4	105.1	100.6	96.6	93.4	90.8	89.2	88.0	8.4	24.3
15,0°	116.0	116.8	117.6	109.1	101.2	94.7	88.9	82.7	77.5	75.0	73.4	10.4	34.7
17,5°	139.7	125.7	112.7	102.6	94.6	89.1	84.7	80.1	75.7	74.2	72.8	12.7	47.4
20,0°	163.4	133.0	107.2	94.3	87.5	82.1	78.6	75.8	73.8	72.8	72.1	15.3	62.7
22,5°	151.0	124.6	101.5	87.2	78.1	72.7	69.9	67.8	66.4	66.1	65.9	17.9	80.6
25,0°	135.4	113.5	93.9	80.5	71.1	65.3	61.1	60.0	58.9	59.3	59.7	20.6	101.1
27,5°	112.9	97.6	82.4	74.1	68.4	63.2	58.5	58.2	57.9	58.1	58.4	23.2	124.3
30,0°	94.4	82.6	72.4	67.5	64.3	60.1	56.0	56.4	56.9	57.0	57.1	25.8	150.2
32,5°	80.6	71.7	64.5	60.2	57.4	55.6	54.2	53.9	53.6	52.6	51.5	28.4	178.6
35,0°	69.6	62.4	57.1	54.0	51.8	51.5	51.1	50.6	49.8	48.1	46.2	31.1	209.7
37,5°	62.1	55.8	49.6	49.0	48.3	47.0	45.4	45.3	45.2	43.0	40.7	33.7	243.4
40,0°	55.7	49.5	43.7	44.0	44.3	42.4	40.5	40.3	40.1	38.0	35.9	36.5	279.9
42,5°	50.5	44.3	40.1	39.7	39.3	37.9	36.4	34.7	33.2	32.4	31.9	40.2	320.1
45,0°	45.5	41.1	36.7	35.9	35.1	34.3	33.1	30.8	28.1	28.2	28.3	43.1	363.3
47,5°	40.8	37.2	33.6	32.5	31.4	31.1	30.9	28.2	25.4	25.3	25.1	44.7	407.9
50,0°	36.2	33.3	30.4	29.6	28.8	29.0	29.2	26.3	23.4	22.8	22.2	46.1	454.0
52,5°	31.0	28.9	26.9	27.4	27.8	28.0	28.1	25.0	22.2	20.7	19.7	46.9	500.9
55,0°	27.2	25.4	23.6	25.1	26.6	26.9	27.2	24.2	21.3	19.3	17.4	47.7	548.7
57,5°	26.0	22.8	20.6	23.0	25.1	26.0	26.6	23.8	21.0	18.3	15.6	48.6	597.2
60,0°	24.0	21.0	18.1	20.9	23.3	24.8	25.9	23.3	20.6	17.2	13.7	49.2	646.5
62,5°	20.9	18.1	16.2	18.7	21.2	21.9	22.5	20.6	18.5	16.0	13.4	49.9	696.3
65,0°	17.8	16.0	14.3	16.7	19.1	19.4	19.8	18.2	16.6	14.7	12.9	50.6	746.9
67,5°	17.5	15.6	13.7	15.6	17.2	18.1	18.7	16.9	15.1	13.7	12.4	52.1	799.0
70,0°	17.3	15.2	13.2	13.9	14.7	15.6	16.4	14.7	13.2	12.2	11.3	50.2	849.2
72,5°	17.4	14.6	13.1	11.9	10.9	11.5	12.1	11.3	10.6	10.1	9.8	41.2	890.4
75,0°	17.5	14.8	13.0	10.6	8.2	8.3	8.4	8.2	8.0	7.7	7.4	33.2	923.6
77,5°	15.5	13.1	11.1	9.0	6.9	6.2	5.6	5.2	5.0	3.9	2.9	27.2	950.8
80,0°	13.3	11.2	9.0	7.2	5.6	4.1	2.8	2.8	2.7	1.5	0.2	21.1	971.9
82,5°	11.3	8.7	6.5	5.1	4.0	2.9	1.9	1.7	1.6	0.9	0.2	15.2	987.1
85,0°	8.4	6.1	4.1	3.2	2.6	1.8	1.1	0.7	0.4	0.3	0.2	9.4	996.5
87,5°	3.1	2.3	1.6	1.2	1.0	0.7	0.4	0.3	0.2	0.2	0.1	3.5	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C51E08GE EAN: 4058352583739	LP number 58290_302
------------------------------------------	----------------------------------------------------------------	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	3030	19.4	20.0	19.7
95	241	252	2875	18.5	18.9	18.7
90	229	250	2732	17.5	18.0	17.8
85	216	248	2577	16.6	17.0	16.8
80	203	246	2422	15.6	16.0	15.8
75	190	243	2267	14.6	15.0	14.8
70	178	241	2123	13.7	14.0	13.8
65	165	238	1968	12.8	13.1	13.0
60	152	235	1813	11.8	12.2	12.0
55	140	232	1670	11.0	11.2	11.1
50	127	229	1515	10.1	10.3	10.2
45	114	225	1360	9.2	9.4	9.3
40	102	221	1217	8.3	8.4	8.4
35	89	216	1062	7.4	7.5	7.4
30	76	210	907	6.5	6.6	6.6
25	63	203	752	5.6	5.7	5.6
20	52	196	620	4.9	5.0	5.0