


Photometric test report

Family Silica® 31	Order number: 51MY6NDS34WA EAN: 4069025073419	LP number 59651_8
	Version recessed luminaire for lay-in mounting, white, square M600, reflector, white, wide distribution, UGR≤19 (L65≤3000cd/m²)	serial documentation 28.06.2024
	Lamps LED 3000 K CRI ≥ 80	
Controlgear ECG-DALI		
Setting factory setting: DIP-Step=10		
Rated values Net luminous flux = 4540 lm Power consumption = 28.0 W Luminous efficacy = 162.1 lm/W		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 581 cd/klm**

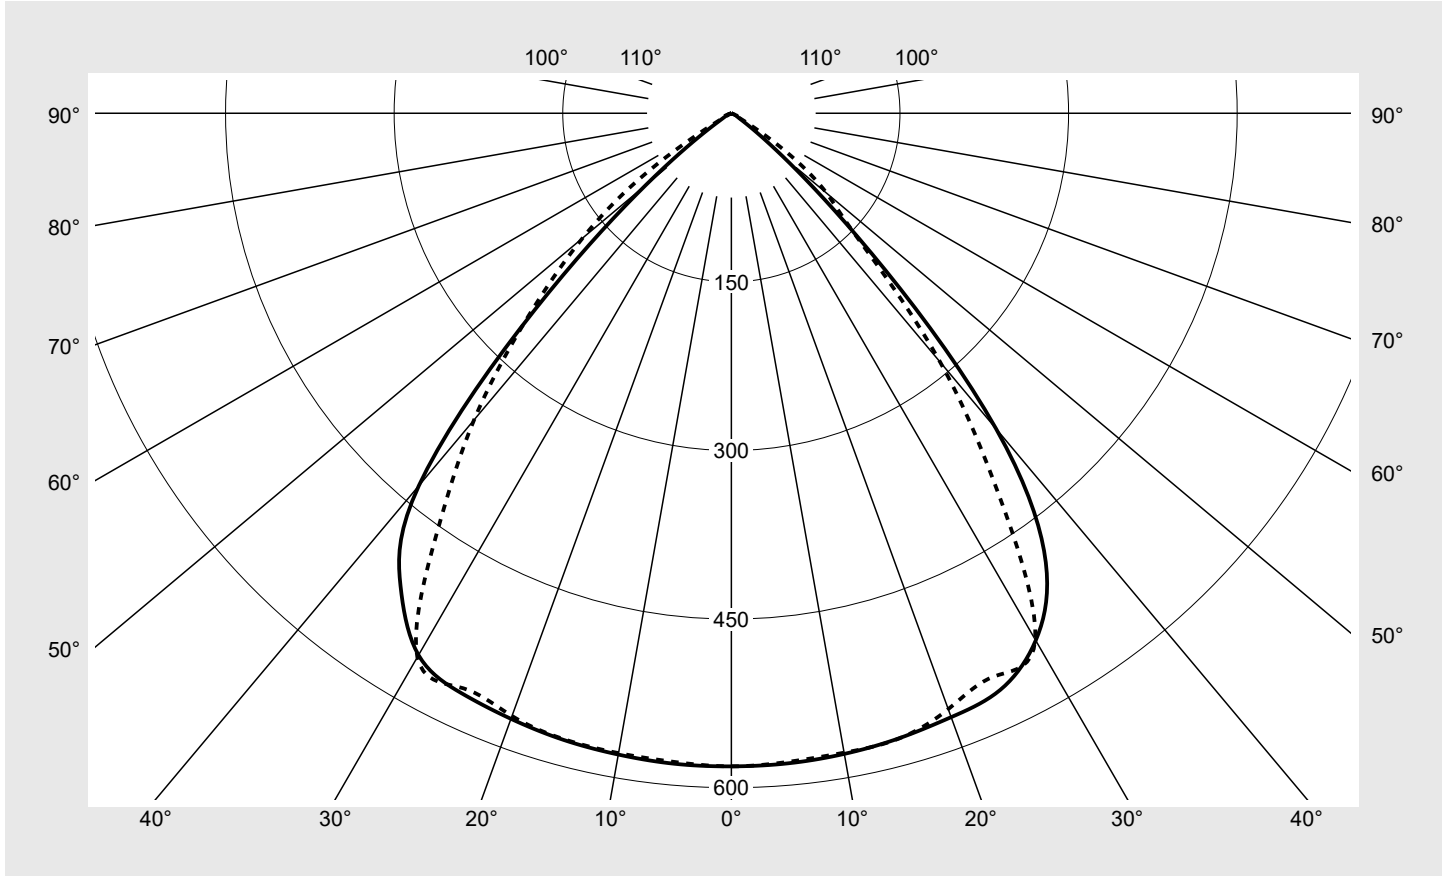

Classifications	
DIN 5040	A 6 0
CIE	N1=81 N2=99 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 31	Order number: 51MY6NDS34WA EAN: 4069025073419	LP number 59651_8
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
γ	Luminous intensity in cd/klm												
0°	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0
5°	580.5	580.1	579.7	579.4	579.4	579.4	579.2	579.0	579.2	579.6	580.0	580.5	580.9
10°	578.7	578.5	578.4	578.3	578.0	577.7	577.6	577.5	578.2	578.7	578.6	578.8	579.3
15°	575.7	576.4	576.8	577.2	576.7	576.4	575.9	576.2	577.1	577.5	576.7	576.6	577.1
20°	571.7	572.8	573.6	576.1	569.0	564.9	564.1	566.2	570.5	575.8	575.1	572.8	573.3
25°	566.0	566.0	569.7	558.0	553.5	552.0	552.9	555.0	555.9	560.9	570.4	567.8	569.0
30°	541.6	540.0	546.9	525.4	533.0	536.9	540.7	543.2	535.9	528.0	550.7	551.3	556.7
35°	487.7	474.2	457.4	466.6	474.3	428.4	415.5	433.8	482.1	473.9	481.9	504.4	513.2
40°	366.3	361.1	338.8	353.2	337.9	294.5	289.0	304.8	337.6	388.1	355.1	393.3	432.6
45°	177.0	197.8	189.9	224.7	192.0	162.4	163.7	169.6	200.0	223.2	205.3	207.1	247.5
50°	59.6	73.0	68.9	101.0	76.5	96.8	110.7	105.6	75.4	118.3	93.8	83.2	99.3
55°	15.4	19.6	34.5	33.2	43.5	54.3	58.4	57.4	47.2	34.2	37.6	30.2	25.8
60°	6.2	7.6	11.7	17.6	20.1	12.5	5.7	12.8	19.7	20.8	16.2	8.0	8.2
65°	3.9	4.0	4.5	8.0	4.3	4.4	4.3	4.4	4.4	8.4	4.7	4.4	4.5
70°	2.5	2.7	2.8	2.8	3.1	3.0	2.9	3.0	3.1	2.9	2.9	2.7	3.0
75°	1.6	1.7	1.7	1.8	1.8	1.7	1.5	1.6	1.8	1.9	1.8	1.7	1.9
80°	0.9	1.0	1.0	0.9	0.4	0.1	0.0	0.1	0.4	0.8	1.0	1.0	1.2
85°	0.3	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.5	0.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Silica® 31	Order number: 51MY6NDS34WA EAN: 4069025073419	LP number 59651_8
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0°	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	3.5	3.5
5°	580.6	580.2	579.9	579.4	579.2	579.3	579.6	579.6	579.6	579.9	580.2	27.7	31.2
10°	578.7	578.5	579.0	578.9	578.0	578.0	578.3	578.9	579.0	578.8	578.6	55.1	86.2
15°	576.8	576.9	577.2	577.4	577.4	576.4	577.2	578.0	577.5	577.0	576.5	81.8	168.1
20°	573.4	575.5	576.5	572.6	571.3	570.6	571.8	573.3	576.3	573.9	572.8	107.3	275.4
25°	568.6	571.7	567.0	563.8	563.3	564.4	565.2	564.3	564.4	569.1	566.4	130.6	405.9
30°	556.7	557.9	546.1	551.7	555.8	558.7	557.7	551.5	541.1	552.6	542.8	149.6	555.5
35°	512.6	507.6	507.3	509.7	467.7	457.5	468.2	504.9	500.8	479.1	486.3	150.6	706.1
40°	418.8	394.7	438.8	381.7	362.9	356.1	354.7	376.9	409.9	373.1	383.3	129.2	835.4
45°	231.5	245.7	274.1	252.0	248.3	255.5	243.3	232.7	270.2	228.4	219.8	85.0	920.3
50°	100.9	114.3	152.3	123.7	166.7	172.8	157.5	112.9	125.8	91.5	77.8	44.8	965.1
55°	35.6	44.5	45.1	77.3	90.7	91.0	88.1	63.5	43.5	44.4	20.3	21.2	986.3
60°	9.0	19.9	27.4	32.0	20.3	8.7	20.2	30.1	23.2	14.3	8.1	7.5	993.9
65°	4.7	6.0	11.5	7.6	6.8	6.4	6.8	7.5	11.0	5.2	4.2	2.9	996.8
70°	2.9	3.3	4.3	5.1	4.5	4.2	4.5	5.1	3.8	3.1	2.9	1.7	998.5
75°	1.9	2.0	2.5	2.7	2.2	2.0	2.2	2.6	2.2	1.9	1.8	1.0	999.6
80°	1.1	1.2	1.0	0.5	0.1	0.0	0.1	0.5	1.0	1.1	1.1	0.4	999.9
85°	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.5	0.1	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 31	Order number: 51MY6NDS34WA EAN: 4069025073419	LP number 59651_8
-----------------------------	--	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.7	21.1	20.1	21.4	21.7	19.5	20.9	19.9	21.2	21.5
	3H	19.6	20.8	20.0	21.1	21.5	19.4	20.6	19.8	20.9	21.3
	4H	19.5	20.6	19.9	21.0	21.3	19.3	20.4	19.7	20.8	21.1
	6H	19.5	20.5	19.9	20.8	21.2	19.3	20.2	19.7	20.6	21.0
	8H	19.4	20.4	19.9	20.7	21.2	19.2	20.2	19.7	20.5	21.0
	12H	19.5	20.3	19.9	20.7	21.1	19.3	20.1	19.7	20.5	20.9
4H	2H	19.6	20.7	20.0	21.0	21.4	19.3	20.4	19.7	20.8	21.2
	3H	19.4	20.3	19.9	20.7	21.1	19.2	20.1	19.6	20.5	20.9
	4H	19.4	20.2	19.8	20.6	21.0	19.1	19.9	19.6	20.3	20.8
	6H	19.3	20.0	19.7	20.4	20.9	19.1	19.7	19.5	20.2	20.6
	8H	19.2	19.9	19.7	20.3	20.8	19.0	19.6	19.5	20.1	20.6
	12H	19.2	19.7	19.7	20.2	20.7	19.0	19.5	19.5	20.0	20.5
8H	4H	19.3	19.9	19.7	20.3	20.8	19.0	19.6	19.5	20.1	20.6
	6H	19.2	19.6	19.7	20.1	20.6	18.9	19.4	19.4	19.9	20.4
	8H	19.1	19.5	19.6	20.0	20.6	18.9	19.3	19.4	19.8	20.3
	12H	19.1	19.4	19.6	19.9	20.5	18.8	19.2	19.4	19.7	20.2
12H	4H	19.2	19.7	19.7	20.2	20.7	19.0	19.5	19.5	20.0	20.5
	6H	19.1	19.5	19.6	20.0	20.6	18.9	19.3	19.4	19.8	20.3
	8H	19.1	19.4	19.6	19.9	20.5	18.8	19.2	19.4	19.7	20.2


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 240	B = 240
------------------------	---	--------------------------------------	----------------	----------------

C-planes	0°	30°	60°	90°	120°	150°	180°	210°	240°	270°	300°	330°
γ	Luminance in cd/m ²											
45°	19732.7	21169.1	21403.0	18251.5	22293.8	22884.1	27583.4	27382.9	28084.5	28485.3	25935.1	25456.4
50°	7310.8	8453.8	9376.2	13573.1	9243.9	11499.1	12175.3	14014.1	15165.6	21192.6	13842.6	11214.9
55°	2119.7	4744.5	5971.9	8022.8	6481.2	5170.1	3547.3	6109.2	10624.3	12502.2	8732.5	6099.6
60°	969.5	1837.8	3163.8	896.8	3102.3	2560.7	1295.6	3137.0	5039.4	1366.9	4738.6	2258.3
65°	721.0	831.4	807.6	802.1	828.8	869.3	842.8	1119.0	1421.3	1202.0	1401.8	976.9
70°	585.1	649.0	709.8	670.8	712.6	660.2	691.8	752.9	1175.5	972.3	1169.8	719.9
75°	484.8	521.4	557.3	463.5	552.7	544.2	593.5	624.0	811.0	605.7	799.1	580.7
80°	401.3	466.6	187.0	0.0	178.8	473.9	529.7	561.5	232.4	0.0	233.8	520.6
85°	265.0	0.0	0.0	0.0	0.0	0.0	516.4	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Silica® 31	Order number: 51MY6NDS34WA EAN: 4069025073419	LP number 59651_8
-----------------------------	--	-----------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

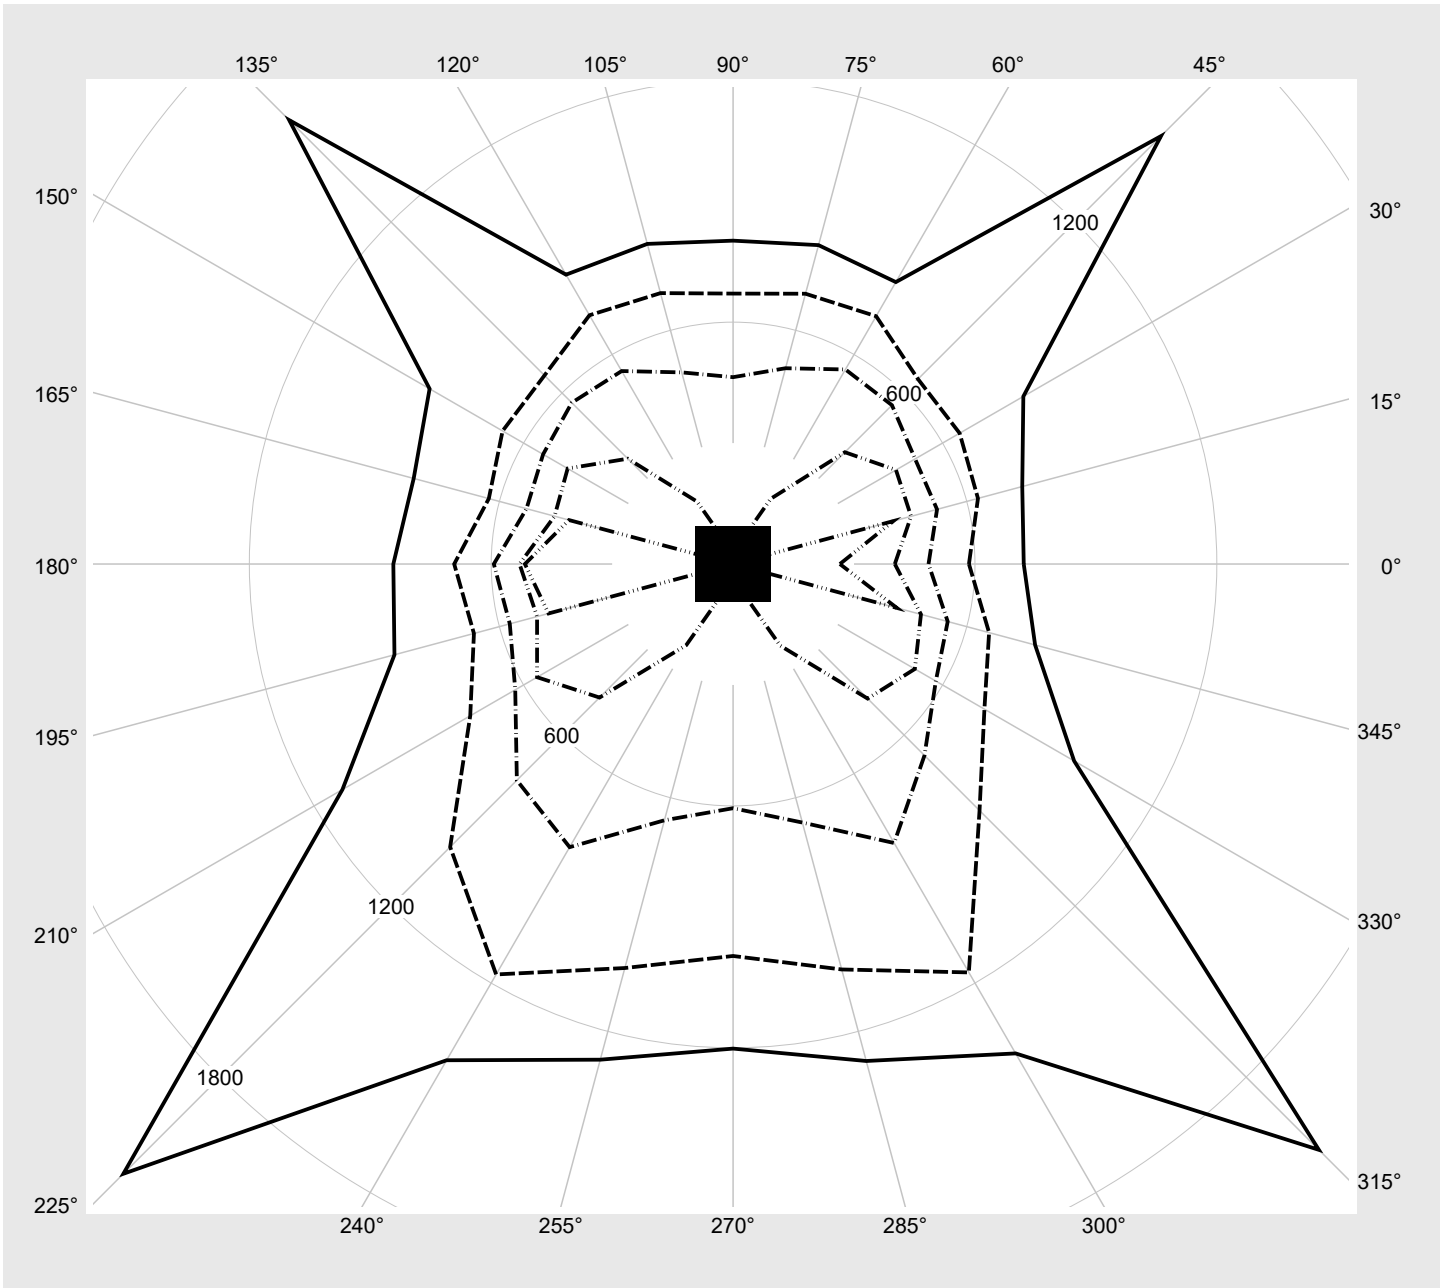

Photometric test report

Family Silica® 31	Order number: 51MY6NDS34WA EAN: 4069025073419	LP number 59651_8
-----------------------------	--	-----------------------------

Multilumen Table	environmental temperature: 25°C	siteco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
0	OFF	OFF	OFF	OFF	6230	38.5
1	ON	OFF	OFF	OFF	5960	37.0
2	OFF	ON	OFF	OFF	5680	35.0
4	OFF	OFF	ON	OFF	5400	33.0
7	ON	ON	ON	OFF	5130	31.0
8	OFF	OFF	OFF	ON	4820	29.5
10	OFF	ON	OFF	ON	4540	28.0
12	OFF	OFF	ON	ON	4330	26.0
13	ON	OFF	ON	ON	3960	24.0
14	OFF	ON	ON	ON	3670	22.5