


Photometric test report

Family Silica® 31	Order number: 51MY6NMS34WA EAN: 4069025073532	LP number 59651_7
	Version recessed luminaire for lay-in mounting, white, square M600, reflector, white, wide distribution, UGR≤19 (L65≤3000cd/m²)	serial documentation 28.06.2024
	Lamps LED 3000 K CRI ≥ 80	
Controlgear ECG Multilumen		
Setting factory setting: DIP-Step=6		
Rated values	Net luminous flux = 4580 lm	
	Power consumption = 26.0 W	
	Luminous efficacy = 176.2 lm/W	



Luminous intensity in cd/klm C180-0 C270-90 **Imax: 581 cd/klm**

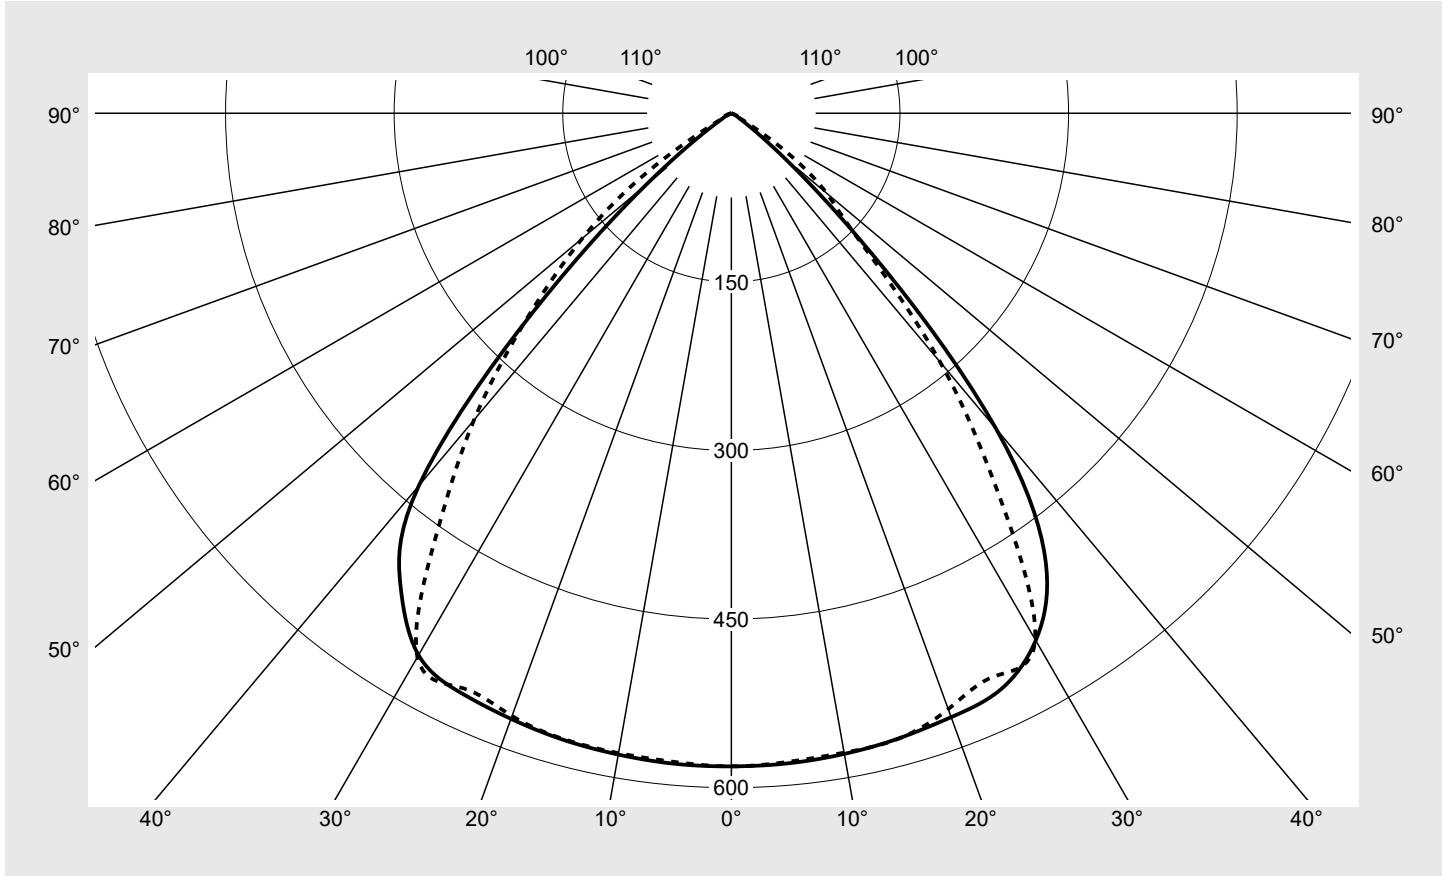

Classifications	
DIN 5040	A 6 0
CIE	N1=81 N2=99 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 31	Order number: 51MY6NMS34WA EAN: 4069025073532	LP number 59651_7
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
γ	Luminous intensity in cd/klm												
0°	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0
5°	580.5	580.1	579.7	579.4	579.4	579.4	579.2	579.0	579.2	579.6	580.0	580.5	580.9
10°	578.7	578.5	578.4	578.3	578.0	577.7	577.6	577.5	578.2	578.7	578.6	578.8	579.3
15°	575.7	576.4	576.8	577.2	576.7	576.4	575.9	576.2	577.1	577.5	576.7	576.6	577.1
20°	571.7	572.8	573.6	576.1	569.0	564.9	564.1	566.2	570.5	575.8	575.1	572.8	573.3
25°	566.0	566.0	569.7	558.0	553.5	552.0	552.9	555.0	555.9	560.9	570.4	567.8	569.0
30°	541.6	540.0	546.9	525.4	533.0	536.9	540.7	543.2	535.9	528.0	550.7	551.3	556.7
35°	487.7	474.2	457.4	466.6	474.3	428.4	415.5	433.8	482.1	473.9	481.9	504.4	513.2
40°	366.3	361.1	338.8	353.2	337.9	294.5	289.0	304.8	337.6	388.1	355.1	393.3	432.6
45°	177.0	197.8	189.9	224.7	192.0	162.4	163.7	169.6	200.0	223.2	205.3	207.1	247.5
50°	59.6	73.0	68.9	101.0	76.5	96.8	110.7	105.6	75.4	118.3	93.8	83.2	99.3
55°	15.4	19.6	34.5	33.2	43.5	54.3	58.4	57.4	47.2	34.2	37.6	30.2	25.8
60°	6.2	7.6	11.7	17.6	20.1	12.5	5.7	12.8	19.7	20.8	16.2	8.0	8.2
65°	3.9	4.0	4.5	8.0	4.3	4.4	4.3	4.4	4.4	8.4	4.7	4.4	4.5
70°	2.5	2.7	2.8	2.8	3.1	3.0	2.9	3.0	3.1	2.9	2.9	2.7	3.0
75°	1.6	1.7	1.7	1.8	1.8	1.7	1.5	1.6	1.8	1.9	1.8	1.7	1.9
80°	0.9	1.0	1.0	0.9	0.4	0.1	0.0	0.1	0.4	0.8	1.0	1.0	1.2
85°	0.3	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.5	0.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Silica® 31	Order number: 51MY6NMS34WA EAN: 4069025073532	LP number 59651_7
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
	Luminous intensity in cd/klm												
0°	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	3.5	3.5
5°	580.6	580.2	579.9	579.4	579.2	579.3	579.6	579.6	579.6	579.9	580.2	27.7	31.2
10°	578.7	578.5	579.0	578.9	578.0	578.0	578.3	578.9	579.0	578.8	578.6	55.1	86.2
15°	576.8	576.9	577.2	577.4	577.4	576.4	577.2	578.0	577.5	577.0	576.5	81.8	168.1
20°	573.4	575.5	576.5	572.6	571.3	570.6	571.8	573.3	576.3	573.9	572.8	107.3	275.4
25°	568.6	571.7	567.0	563.8	563.3	564.4	565.2	564.3	564.4	569.1	566.4	130.6	405.9
30°	556.7	557.9	546.1	551.7	555.8	558.7	557.7	551.5	541.1	552.6	542.8	149.6	555.5
35°	512.6	507.6	507.3	509.7	467.7	457.5	468.2	504.9	500.8	479.1	486.3	150.6	706.1
40°	418.8	394.7	438.8	381.7	362.9	356.1	354.7	376.9	409.9	373.1	383.3	129.2	835.4
45°	231.5	245.7	274.1	252.0	248.3	255.5	243.3	232.7	270.2	228.4	219.8	85.0	920.3
50°	100.9	114.3	152.3	123.7	166.7	172.8	157.5	112.9	125.8	91.5	77.8	44.8	965.1
55°	35.6	44.5	45.1	77.3	90.7	91.0	88.1	63.5	43.5	44.4	20.3	21.2	986.3
60°	9.0	19.9	27.4	32.0	20.3	8.7	20.2	30.1	23.2	14.3	8.1	7.5	993.9
65°	4.7	6.0	11.5	7.6	6.8	6.4	6.8	7.5	11.0	5.2	4.2	2.9	996.8
70°	2.9	3.3	4.3	5.1	4.5	4.2	4.5	5.1	3.8	3.1	2.9	1.7	998.5
75°	1.9	2.0	2.5	2.7	2.2	2.0	2.2	2.6	2.2	1.9	1.8	1.0	999.6
80°	1.1	1.2	1.0	0.5	0.1	0.0	0.1	0.5	1.0	1.1	1.1	0.4	999.9
85°	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.5	0.1	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 31	Order number: 51MY6NMS34WA EAN: 4069025073532	LP number 59651_7
-----------------------------	--	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.8	21.1	20.1	21.4	21.7	19.5	20.9	19.9	21.2	21.5
	3H	19.6	20.8	20.0	21.1	21.5	19.4	20.6	19.8	20.9	21.3
	4H	19.6	20.6	20.0	21.0	21.4	19.4	20.4	19.8	20.8	21.2
	6H	19.5	20.5	19.9	20.9	21.3	19.3	20.3	19.7	20.7	21.0
	8H	19.5	20.4	19.9	20.8	21.2	19.3	20.2	19.7	20.6	21.0
	12H	19.5	20.3	19.9	20.7	21.1	19.3	20.1	19.7	20.5	20.9
4H	2H	19.6	20.7	20.0	21.0	21.4	19.4	20.5	19.8	20.8	21.2
	3H	19.5	20.4	19.9	20.8	21.2	19.2	20.1	19.7	20.5	20.9
	4H	19.4	20.2	19.8	20.6	21.0	19.2	20.0	19.6	20.4	20.8
	6H	19.3	20.0	19.8	20.4	20.9	19.1	19.8	19.6	20.2	20.7
	8H	19.3	19.9	19.8	20.3	20.8	19.1	19.7	19.5	20.1	20.6
	12H	19.3	19.8	19.8	20.2	20.7	19.0	19.6	19.5	20.0	20.5
8H	4H	19.3	19.9	19.8	20.3	20.8	19.1	19.7	19.5	20.1	20.6
	6H	19.2	19.7	19.7	20.2	20.7	19.0	19.5	19.5	19.9	20.4
	8H	19.1	19.6	19.6	20.1	20.6	18.9	19.3	19.4	19.8	20.4
	12H	19.1	19.5	19.6	20.0	20.5	18.9	19.2	19.4	19.7	20.3
12H	4H	19.3	19.8	19.8	20.2	20.7	19.0	19.6	19.5	20.0	20.5
	6H	19.2	19.6	19.7	20.1	20.6	18.9	19.3	19.4	19.8	20.4
	8H	19.1	19.5	19.6	20.0	20.5	18.9	19.2	19.4	19.7	20.3

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 240	B = 240
------------------------	---	--------------------------------------	----------------	----------------


C-planes	0°	30°	60°	90°	120°	150°	180°	210°	240°	270°	300°	330°
γ	Luminance in cd/m²											
45°	19906.5	21355.6	21591.6	18412.3	22490.3	23085.7	27826.4	27624.1	28331.9	28736.3	26163.7	25680.7
50°	7375.2	8528.2	9458.8	13692.7	9325.4	11600.4	12282.6	14137.6	15299.2	21379.4	13964.6	11313.8
55°	2138.3	4786.3	6024.5	8093.5	6538.3	5215.6	3578.5	6163.0	10717.9	12612.4	8809.4	6153.3
60°	978.0	1853.9	3191.7	904.7	3129.7	2583.2	1307.0	3164.7	5083.8	1378.9	4780.4	2278.2
65°	727.4	838.8	814.7	809.2	836.1	876.9	850.2	1128.9	1433.9	1212.6	1414.1	985.5
70°	590.3	654.7	716.0	676.8	718.8	666.1	697.9	759.5	1185.9	980.8	1180.1	726.3
75°	489.1	526.0	562.2	467.6	557.6	549.0	598.8	629.5	818.1	611.1	806.1	585.9
80°	404.8	470.7	188.7	0.0	180.4	478.0	534.4	566.4	234.4	0.0	235.8	525.2
85°	267.3	0.0	0.0	0.0	0.0	0.0	520.9	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Silica® 31	Order number: 51MY6NMS34WA EAN: 4069025073532	LP number 59651_7
------------------------------------	--	------------------------------------

Luminance values in cd/m²

γ 65°
γ 70°
γ 75°
γ 80°
γ 85°

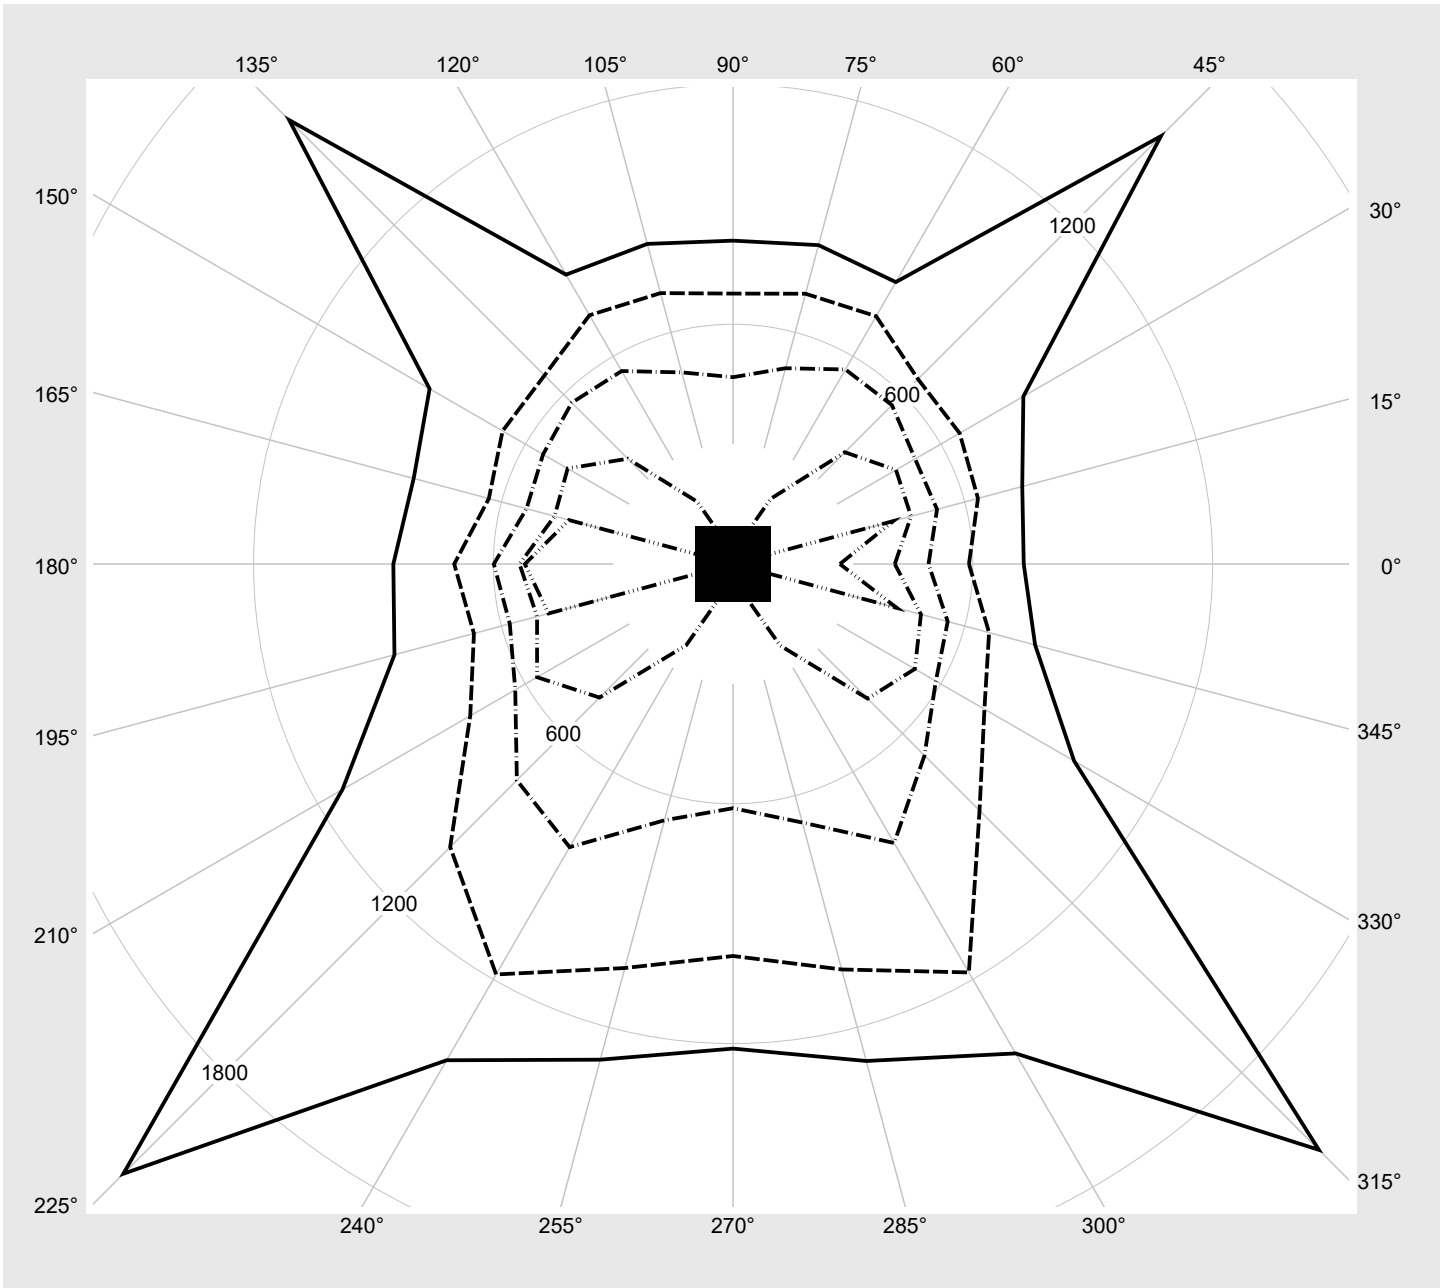

Photometric test report

Family Silica® 31	Order number: 51MY6NMS34WA EAN: 4069025073532	LP number 59651_7
-----------------------------	--	-----------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
15	ON	ON	ON	ON	6600	39.0
14	OFF	ON	ON	ON	6320	37.0
13	ON	OFF	ON	ON	6030	35.0
12	OFF	OFF	ON	ON	5750	33.0
10	OFF	ON	OFF	ON	5470	31.5
9	ON	OFF	OFF	ON	5210	30.0
8	OFF	OFF	OFF	ON	4860	28.0
6	OFF	ON	ON	OFF	4580	26.0
5	ON	OFF	ON	OFF	4310	24.5
4	OFF	OFF	ON	OFF	4030	22.5
2	OFF	ON	OFF	OFF	3730	21.0
1	ON	OFF	OFF	OFF	3420	19.0
0	OFF	OFF	OFF	OFF	3110	17.5