


Photometric test report

| | | |
|--|--|---|
| Family Silica® 31 | Order number: 51MY6NMS44WA EAN: 4069025073563 | LP number 59651_5 |
|  | Version | recessed luminaire for lay-in mounting, white, square M600, reflector, white, wide distribution, UGR≤19 (L65≤3000cd/m²) |
| | Lamps | LED 4000 K CRI ≥ 80 |
| | Controlgear | ECG Multilumen |
| | Setting | factory setting: DIP-Step=5 |
| | Rated values | Net luminous flux = 4560 lm Power consumption = 24.5 W Luminous efficacy = 186.1 lm/W |
| | | serial documentation 28.06.2024 |
| | |  |

Luminous intensity in cd/klm
C180-0
C270-90
Imax: 581 cd/klm

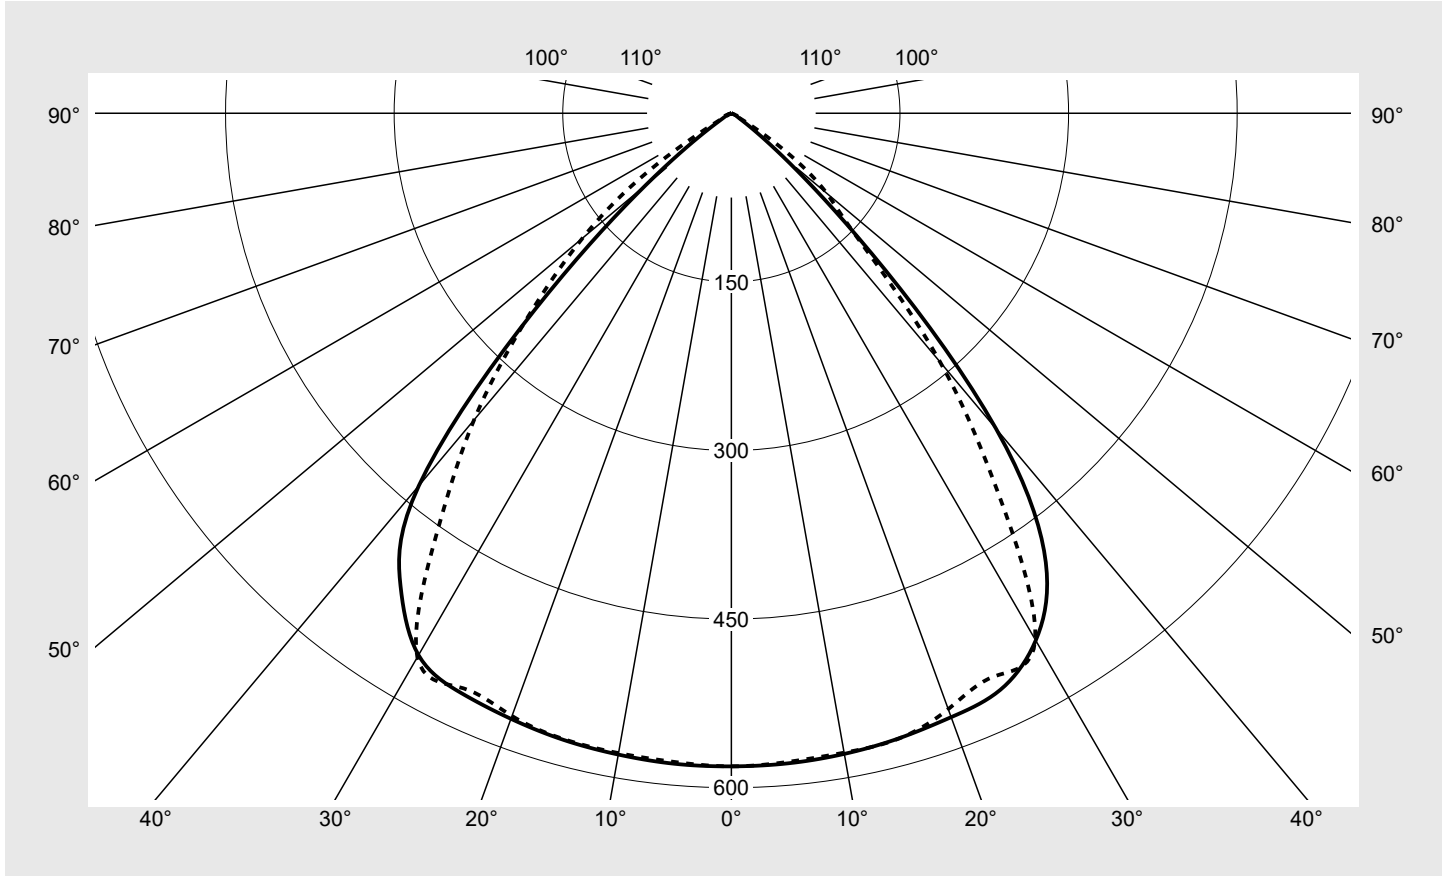

| Classifications | |
|-----------------|-------------------------------------|
| DIN 5040 | A 6 0 |
| CIE | N1=81 N2=99 N3=100 N4=100 N5=100 |

| Luminaire light output ratios | |
|-------------------------------|--------|
| η_{LB} | 100.0% |
| ϕ_u | 100.0% |
| ϕ_o | 0.0% |

| Measurement conditions |
|---------------------------|
| DIN EN 13032 and DIN 5032 |

Photometric test report

| | | |
|---|--|------------------------------------|
| Family Silica® 31 | Order number: 51MY6NMS44WA EAN: 4069025073563 | LP number 59651_5 |
| Table of values for luminous intensities | | Maximum luminous intensity |
| | | siteco |

| C-planes | 0° | 15° | 30° | 45° | 60° | 75° | 90° | 105° | 120° | 135° | 150° | 165° | 180° |
|----------|------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| γ | Luminous intensity in cd/klm | | | | | | | | | | | | |
| 0° | 581.0 | 581.0 | 581.0 | 581.0 | 581.0 | 581.0 | 581.0 | 581.0 | 581.0 | 581.0 | 581.0 | 581.0 | 581.0 |
| 5° | 580.5 | 580.1 | 579.7 | 579.4 | 579.4 | 579.4 | 579.2 | 579.0 | 579.2 | 579.6 | 580.0 | 580.5 | 580.9 |
| 10° | 578.7 | 578.5 | 578.4 | 578.3 | 578.0 | 577.7 | 577.6 | 577.5 | 578.2 | 578.7 | 578.6 | 578.8 | 579.3 |
| 15° | 575.7 | 576.4 | 576.8 | 577.2 | 576.7 | 576.4 | 575.9 | 576.2 | 577.1 | 577.5 | 576.7 | 576.6 | 577.1 |
| 20° | 571.7 | 572.8 | 573.6 | 576.1 | 569.0 | 564.9 | 564.1 | 566.2 | 570.5 | 575.8 | 575.1 | 572.8 | 573.3 |
| 25° | 566.0 | 566.0 | 569.7 | 558.0 | 553.5 | 552.0 | 552.9 | 555.0 | 555.9 | 560.9 | 570.4 | 567.8 | 569.0 |
| 30° | 541.6 | 540.0 | 546.9 | 525.4 | 533.0 | 536.9 | 540.7 | 543.2 | 535.9 | 528.0 | 550.7 | 551.3 | 556.7 |
| 35° | 487.7 | 474.2 | 457.4 | 466.6 | 474.3 | 428.4 | 415.5 | 433.8 | 482.1 | 473.9 | 481.9 | 504.4 | 513.2 |
| 40° | 366.3 | 361.1 | 338.8 | 353.2 | 337.9 | 294.5 | 289.0 | 304.8 | 337.6 | 388.1 | 355.1 | 393.3 | 432.6 |
| 45° | 177.0 | 197.8 | 189.9 | 224.7 | 192.0 | 162.4 | 163.7 | 169.6 | 200.0 | 223.2 | 205.3 | 207.1 | 247.5 |
| 50° | 59.6 | 73.0 | 68.9 | 101.0 | 76.5 | 96.8 | 110.7 | 105.6 | 75.4 | 118.3 | 93.8 | 83.2 | 99.3 |
| 55° | 15.4 | 19.6 | 34.5 | 33.2 | 43.5 | 54.3 | 58.4 | 57.4 | 47.2 | 34.2 | 37.6 | 30.2 | 25.8 |
| 60° | 6.2 | 7.6 | 11.7 | 17.6 | 20.1 | 12.5 | 5.7 | 12.8 | 19.7 | 20.8 | 16.2 | 8.0 | 8.2 |
| 65° | 3.9 | 4.0 | 4.5 | 8.0 | 4.3 | 4.4 | 4.3 | 4.4 | 4.4 | 8.4 | 4.7 | 4.4 | 4.5 |
| 70° | 2.5 | 2.7 | 2.8 | 2.8 | 3.1 | 3.0 | 2.9 | 3.0 | 3.1 | 2.9 | 2.9 | 2.7 | 3.0 |
| 75° | 1.6 | 1.7 | 1.7 | 1.8 | 1.8 | 1.7 | 1.5 | 1.6 | 1.8 | 1.9 | 1.8 | 1.7 | 1.9 |
| 80° | 0.9 | 1.0 | 1.0 | 0.9 | 0.4 | 0.1 | 0.0 | 0.1 | 0.4 | 0.8 | 1.0 | 1.0 | 1.2 |
| 85° | 0.3 | 0.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.5 | 0.6 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Photometric test report

| | | |
|---|--|------------------------------------|
| Family Silica® 31 | Order number: 51MY6NMS44WA EAN: 4069025073563 | LP number 59651_5 |
| Table of values for luminous intensities | | Maximum luminous intensity |
| | | sITeCO |

| C-planes | 195° | 210° | 225° | 240° | 255° | 270° | 285° | 300° | 315° | 330° | 345° | Phi-zone | Total Phi-zone |
|----------|------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------------------------|----------------|
| γ | Luminous intensity in cd/klm | | | | | | | | | | | Luminous flux in lm/klm | |
| 0° | 581.0 | 581.0 | 581.0 | 581.0 | 581.0 | 581.0 | 581.0 | 581.0 | 581.0 | 581.0 | 581.0 | 3.5 | 3.5 |
| 5° | 580.6 | 580.2 | 579.9 | 579.4 | 579.2 | 579.3 | 579.6 | 579.6 | 579.6 | 579.9 | 580.2 | 27.7 | 31.2 |
| 10° | 578.7 | 578.5 | 579.0 | 578.9 | 578.0 | 578.0 | 578.3 | 578.9 | 579.0 | 578.8 | 578.6 | 55.1 | 86.2 |
| 15° | 576.8 | 576.9 | 577.2 | 577.4 | 577.4 | 576.4 | 577.2 | 578.0 | 577.5 | 577.0 | 576.5 | 81.8 | 168.1 |
| 20° | 573.4 | 575.5 | 576.5 | 572.6 | 571.3 | 570.6 | 571.8 | 573.3 | 576.3 | 573.9 | 572.8 | 107.3 | 275.4 |
| 25° | 568.6 | 571.7 | 567.0 | 563.8 | 563.3 | 564.4 | 565.2 | 564.3 | 564.4 | 569.1 | 566.4 | 130.6 | 405.9 |
| 30° | 556.7 | 557.9 | 546.1 | 551.7 | 555.8 | 558.7 | 557.7 | 551.5 | 541.1 | 552.6 | 542.8 | 149.6 | 555.5 |
| 35° | 512.6 | 507.6 | 507.3 | 509.7 | 467.7 | 457.5 | 468.2 | 504.9 | 500.8 | 479.1 | 486.3 | 150.6 | 706.1 |
| 40° | 418.8 | 394.7 | 438.8 | 381.7 | 362.9 | 356.1 | 354.7 | 376.9 | 409.9 | 373.1 | 383.3 | 129.2 | 835.4 |
| 45° | 231.5 | 245.7 | 274.1 | 252.0 | 248.3 | 255.5 | 243.3 | 232.7 | 270.2 | 228.4 | 219.8 | 85.0 | 920.3 |
| 50° | 100.9 | 114.3 | 152.3 | 123.7 | 166.7 | 172.8 | 157.5 | 112.9 | 125.8 | 91.5 | 77.8 | 44.8 | 965.1 |
| 55° | 35.6 | 44.5 | 45.1 | 77.3 | 90.7 | 91.0 | 88.1 | 63.5 | 43.5 | 44.4 | 20.3 | 21.2 | 986.3 |
| 60° | 9.0 | 19.9 | 27.4 | 32.0 | 20.3 | 8.7 | 20.2 | 30.1 | 23.2 | 14.3 | 8.1 | 7.5 | 993.9 |
| 65° | 4.7 | 6.0 | 11.5 | 7.6 | 6.8 | 6.4 | 6.8 | 7.5 | 11.0 | 5.2 | 4.2 | 2.9 | 996.8 |
| 70° | 2.9 | 3.3 | 4.3 | 5.1 | 4.5 | 4.2 | 4.5 | 5.1 | 3.8 | 3.1 | 2.9 | 1.7 | 998.5 |
| 75° | 1.9 | 2.0 | 2.5 | 2.7 | 2.2 | 2.0 | 2.2 | 2.6 | 2.2 | 1.9 | 1.8 | 1.0 | 999.6 |
| 80° | 1.1 | 1.2 | 1.0 | 0.5 | 0.1 | 0.0 | 0.1 | 0.5 | 1.0 | 1.1 | 1.1 | 0.4 | 999.9 |
| 85° | 0.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.5 | 0.1 | 1000.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |

Photometric test report

| | | |
|-----------------------------|--|-----------------------------|
| Family Silica® 31 | Order number: 51MY6NMS44WA EAN: 4069025073563 | LP number 59651_5 |
|-----------------------------|--|-----------------------------|

| | | |
|------------------|----------------------|---------------|
| UGR-Table | Standard room | siteco |
|------------------|----------------------|---------------|

| | | | | | | | | | | | |
|------------------------------|---------------------|------|------|------|------|--------------------|------|------|------|------|------|
| Reflection factor of ceiling | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | |
| Reflection factor of walls | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | |
| Reflection factor of floor | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | |
| Room dimensions | View crosswise (C0) | | | | | View endwise (C90) | | | | | |
| x | y | | | | | | | | | | |
| 2H | 2H | 19.7 | 21.1 | 20.1 | 21.4 | 21.7 | 19.5 | 20.9 | 19.9 | 21.2 | 21.5 |
| | 3H | 19.6 | 20.8 | 20.0 | 21.1 | 21.5 | 19.4 | 20.6 | 19.8 | 20.9 | 21.3 |
| | 4H | 19.5 | 20.6 | 19.9 | 21.0 | 21.4 | 19.3 | 20.4 | 19.7 | 20.8 | 21.2 |
| | 6H | 19.5 | 20.5 | 19.9 | 20.8 | 21.2 | 19.3 | 20.3 | 19.7 | 20.6 | 21.0 |
| | 8H | 19.5 | 20.4 | 19.9 | 20.8 | 21.2 | 19.3 | 20.2 | 19.7 | 20.6 | 21.0 |
| | 12H | 19.5 | 20.3 | 19.9 | 20.7 | 21.1 | 19.3 | 20.1 | 19.7 | 20.5 | 20.9 |
| 4H | 2H | 19.6 | 20.7 | 20.0 | 21.0 | 21.4 | 19.4 | 20.5 | 19.8 | 20.8 | 21.2 |
| | 3H | 19.5 | 20.3 | 19.9 | 20.7 | 21.2 | 19.2 | 20.1 | 19.7 | 20.5 | 20.9 |
| | 4H | 19.4 | 20.2 | 19.8 | 20.6 | 21.0 | 19.2 | 19.9 | 19.6 | 20.4 | 20.8 |
| | 6H | 19.3 | 20.0 | 19.8 | 20.4 | 20.9 | 19.1 | 19.8 | 19.5 | 20.2 | 20.7 |
| | 8H | 19.3 | 19.9 | 19.7 | 20.3 | 20.8 | 19.0 | 19.6 | 19.5 | 20.1 | 20.6 |
| | 12H | 19.3 | 19.8 | 19.7 | 20.2 | 20.7 | 19.0 | 19.5 | 19.5 | 20.0 | 20.5 |
| 8H | 4H | 19.3 | 19.9 | 19.7 | 20.3 | 20.8 | 19.0 | 19.6 | 19.5 | 20.1 | 20.6 |
| | 6H | 19.2 | 19.7 | 19.7 | 20.1 | 20.7 | 18.9 | 19.4 | 19.4 | 19.9 | 20.4 |
| | 8H | 19.1 | 19.6 | 19.6 | 20.0 | 20.6 | 18.9 | 19.3 | 19.4 | 19.8 | 20.3 |
| | 12H | 19.1 | 19.4 | 19.6 | 19.9 | 20.5 | 18.9 | 19.2 | 19.4 | 19.7 | 20.3 |
| 12H | 4H | 19.3 | 19.8 | 19.7 | 20.2 | 20.7 | 19.0 | 19.5 | 19.5 | 20.0 | 20.5 |
| | 6H | 19.1 | 19.6 | 19.7 | 20.0 | 20.6 | 18.9 | 19.3 | 19.4 | 19.8 | 20.3 |
| | 8H | 19.1 | 19.4 | 19.6 | 19.9 | 20.5 | 18.9 | 19.2 | 19.4 | 19.7 | 20.3 |


| | | | | |
|------------------------|---|--------------------------------------|----------------|----------------|
| Luminance table | Max. for $\gamma \geq 65^\circ$ | Photometric dimensions in mm: | L = 240 | B = 240 |
|------------------------|---|--------------------------------------|----------------|----------------|

| | | | | | | | | | | | | |
|----------|--------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| C-planes | 0° | 30° | 60° | 90° | 120° | 150° | 180° | 210° | 240° | 270° | 300° | 330° |
| γ | Luminance in cd/m ² | | | | | | | | | | | |
| 45° | 19819.6 | 21262.4 | 21497.3 | 18331.9 | 22392.1 | 22984.9 | 27704.9 | 27503.5 | 28208.2 | 28610.8 | 26049.4 | 25568.5 |
| 50° | 7343.0 | 8491.0 | 9417.5 | 13632.9 | 9284.7 | 11549.7 | 12228.9 | 14075.9 | 15232.4 | 21286.0 | 13903.6 | 11264.3 |
| 55° | 2129.0 | 4765.4 | 5998.2 | 8058.2 | 6509.7 | 5192.8 | 3562.9 | 6136.1 | 10671.1 | 12557.3 | 8770.9 | 6126.4 |
| 60° | 973.8 | 1845.9 | 3177.8 | 900.8 | 3116.0 | 2572.0 | 1301.3 | 3150.8 | 5061.6 | 1372.9 | 4759.5 | 2268.3 |
| 65° | 724.2 | 835.1 | 811.1 | 805.7 | 832.5 | 873.1 | 846.5 | 1123.9 | 1427.6 | 1207.3 | 1407.9 | 981.2 |
| 70° | 587.7 | 651.8 | 712.9 | 673.8 | 715.7 | 663.2 | 694.9 | 756.2 | 1180.7 | 976.6 | 1174.9 | 723.1 |
| 75° | 487.0 | 523.7 | 559.8 | 465.5 | 555.2 | 546.6 | 596.2 | 626.7 | 814.5 | 608.4 | 802.6 | 583.3 |
| 80° | 403.0 | 468.7 | 187.8 | 0.0 | 179.6 | 476.0 | 532.0 | 564.0 | 233.4 | 0.0 | 234.8 | 522.9 |
| 85° | 266.1 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 518.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Photometric test report

| | | |
|------------------------------------|--|------------------------------------|
| Family Silica® 31 | Order number: 51MY6NMS44WA EAN: 4069025073563 | LP number 59651_5 |
|------------------------------------|--|------------------------------------|

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

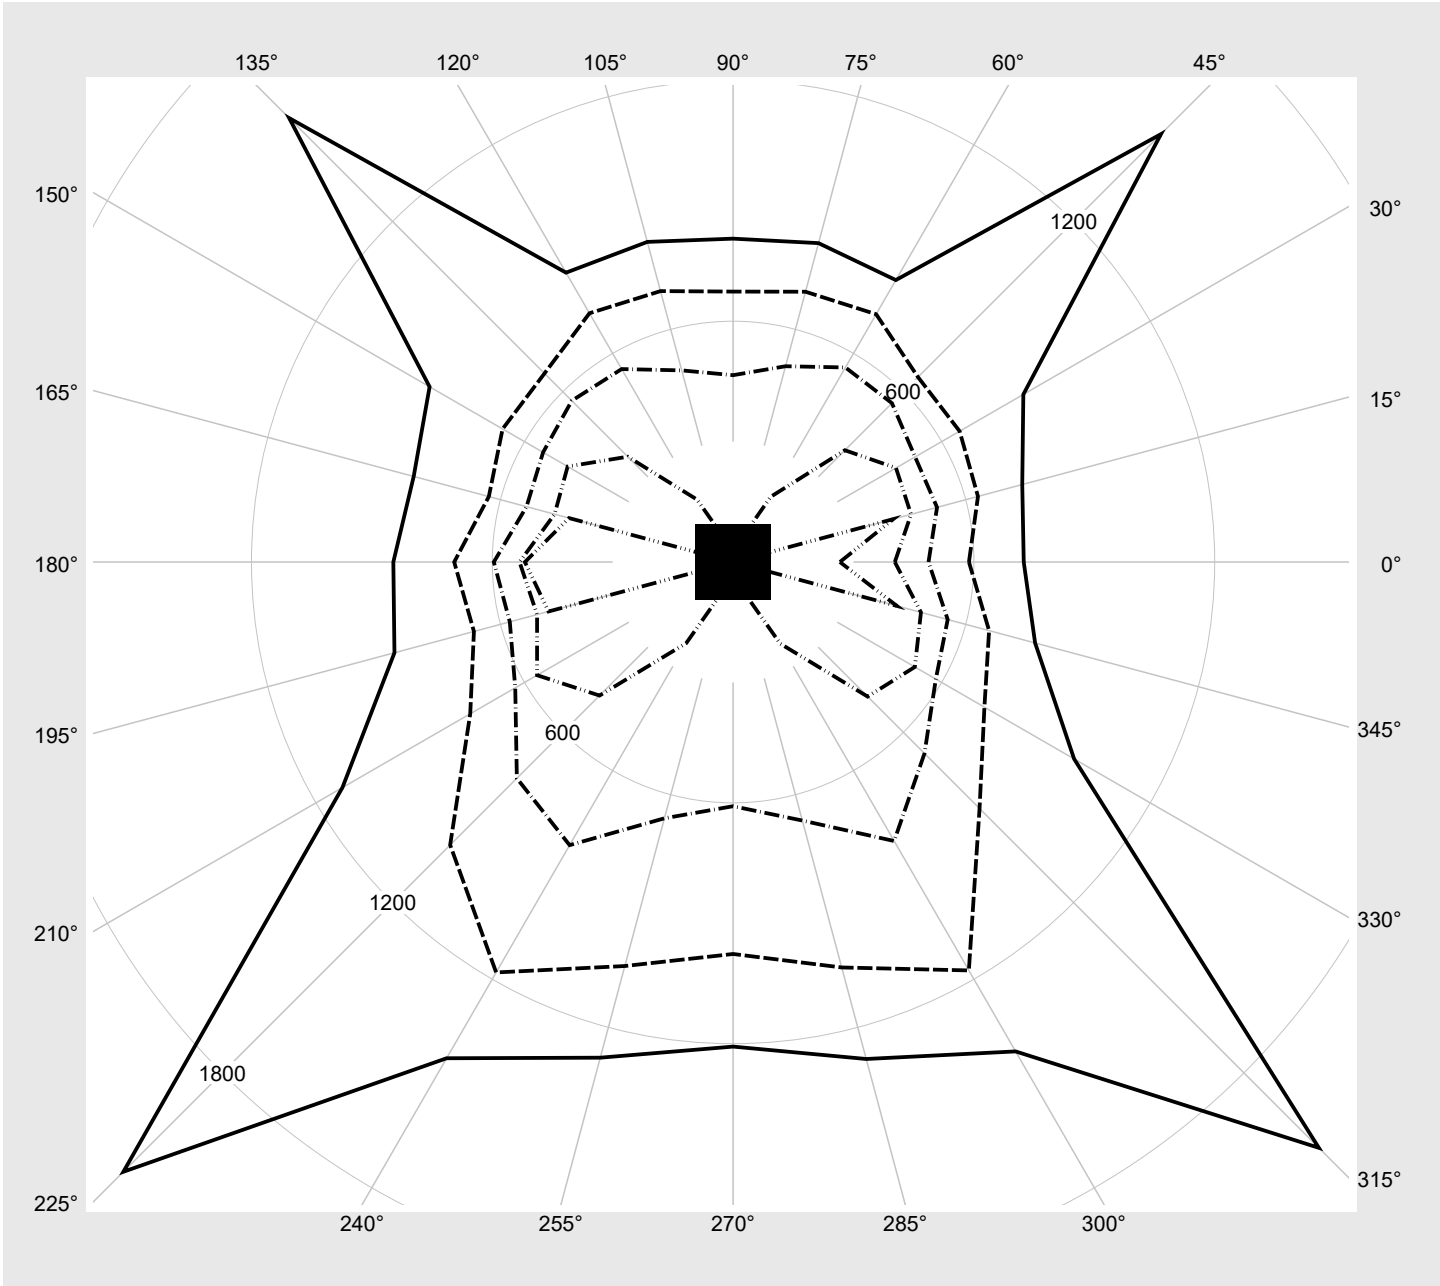

Photometric test report

| | | |
|-----------------------------|--|-----------------------------|
| Family Silica® 31 | Order number: 51MY6NMS44WA EAN: 4069025073563 | LP number 59651_5 |
|-----------------------------|--|-----------------------------|

| | | |
|-------------------------|---------------------------------|---------------|
| Multilumen Table | environmental temperature: 25°C | sITeco |
|-------------------------|---------------------------------|---------------|

| DIP-Step | Switch Setting | | | | Luminous flux [lm] | Power consumption [W] |
|----------|----------------|-----|-----|-----|-----------------------|--------------------------|
| | 1 | 2 | 3 | 4 | | |
| 15 | ON | ON | ON | ON | 6970 | 39.0 |
| 14 | OFF | ON | ON | ON | 6670 | 37.0 |
| 13 | ON | OFF | ON | ON | 6370 | 35.0 |
| 12 | OFF | OFF | ON | ON | 6070 | 33.0 |
| 10 | OFF | ON | OFF | ON | 5780 | 31.5 |
| 9 | ON | OFF | OFF | ON | 5500 | 30.0 |
| 8 | OFF | OFF | OFF | ON | 5130 | 28.0 |
| 6 | OFF | ON | ON | OFF | 4840 | 26.0 |
| 5 | ON | OFF | ON | OFF | 4560 | 24.5 |
| 4 | OFF | OFF | ON | OFF | 4260 | 22.5 |
| 2 | OFF | ON | OFF | OFF | 3940 | 21.0 |
| 1 | ON | OFF | OFF | OFF | 3610 | 19.0 |
| 0 | OFF | OFF | OFF | OFF | 3290 | 17.5 |