

**Order No.:** 51FP10DP460HR | **GTIN (EAN):** 4058352376348


**Product description:** Mon11em,wd,6050lm840,DA2,chang.rel,PMMA



Monsun® 11 emergency, damp-proof luminaire, chain hanger, primary optical cover: enclosure, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, installation type: suspended mounting, surface-mounted, horizontal mounting, vertical mounting, LED, rated luminous flux: 6.050lm, luminous efficacy: 175lm/W, light colour: 840, colour temperature: 4000K, control gear: ECG DALI, with terminal, 5+2-pole, max. 2.5mm<sup>2</sup>, mains connection: 220..240V, AC/DC, 0/50..60Hz, rated input power: 35W, changeover relay for equivalent power supply, AC/DC, 0/50..60Hz, luminaire housing, of glass-fibre reinforced polyester, uncoated, bright grey, incl. chain hanger, length: 1.590mm, width: 90mm, height: 88mm, clip for enclosure, of stainless steel (V2A), ceiling mounting element, of stainless steel (V2A), chain hanger, of stainless steel (V2A), protection rating (complete): IP66, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, protection symbol: D, impact resistance: IK04, permissible operating ambient temperature: -25..+35°C, standard: EN 50419, EN 60598-2-1, EN 60598-2-22, no direct snow, no direct sun, no direct rain, for indoor or canopied outdoor use, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, contact your sales advisor before using the luminaires in applications with unclear chemical exposure, large temperature fluctuations or condensation-forming humidity, LABS conformity tested according to VDMA 24364:2018-05, packaging unit: 1 piece

IP 66

Lamps: LED  
 Wt. (kg): 2.8  
 GTIN (EAN): 4058352376348

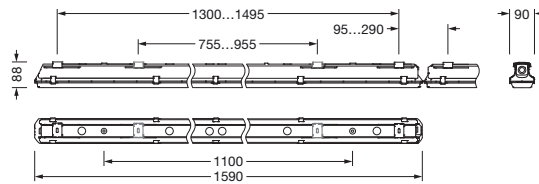

Order No.: 51FP10DP460HR | GTIN (EAN): 4058352376348

Detailed technical description: Mon11em,wd,6050lm840,DA2,chang.rel,PMMA



### Key data

- Product type: damp-proof luminaire
- Product name: Monsun® 11 emergency
- Order No.: 51FP10DP460HR

### Lighting technology | Lamps | Control gear

#### Component 1

#### Lighting technology:

- Cover: enclosure
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 6050lm
- Luminous efficacy: 175lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 35W
- Supplement: for group or central battery, suitable for emergency light operating devices according to IEC 60598-2-22, halogen-free wiring, without flicker, with changeover relay

#### Operating device:

- Switching method: changeover relay for equivalent power supply

#### Component 2

### Certificates, Standards

- Protection rating: IP66
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK04
- Protection symbol: D
- Temperature range (operation): -25..+35°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, for indoor or canopied outdoor use, no direct snow, no direct sun, no direct rain, LABS conformity tested according to VDMA 24364:2018-05, contact your sales advisor before using the luminaires in applications with unclear chemical exposure, large temperature fluctuations or condensation-forming humidity
- Standard: EN 50419, EN 60598-2-1, EN 60598-2-22
- Certification, designation: CE, UKCA

### Material, Colour

- luminaire housing: glass-fibre reinforced polyester, uncoated, bright grey, incl. chain hanger
- Colour specification: bright grey
- clip for enclosure: stainless steel (V2A)
- Quantity: 10 piece
- ceiling mounting element: stainless steel (V2A), ceiling mounting included
- Quantity: 2 piece
- chain hanger: stainless steel (V2A)
- Quantity: 2 piece
- Cover: enclosure of PMMA

### Mounting

- Mounting method, mounting location: suspended mounting, surface-mounted, horizontal mounting, vertical mounting, to the ceiling, to the wall, to the Licross® mounting rail
- Arrangement: single/continuous arrangement
- Supplement: luminaire includes fixing accessories for ceiling surface mounting; for other types of installation: please order mounting accessories separately

**Order No.:** 51FP10DP460HR | **GTIN (EAN):** 4058352376348

**Detailed technical description:** Mon11em,wd,6050lm840,DA2,chang.rel,PMMA



#### **Electrical connection**

- Connection: terminal, 5+2-pole, max. 2.5mm<sup>2</sup>
- Nominal voltage: 220..240V, 0/50..60Hz, AC/DC

#### **Dimensions, Weight**

- Length: 1590mm
- Width: 90mm
- Height: 88mm
- Weight: 2.8kg

#### **Service life**

- Rated service life: 50000h (L90/B50) at AT = 25°C, 70000h (L80/B50) at AT = 35°C

Order No.: 51FP10DP460HR | GTIN (EAN): 4058352376348

Dimensions: Mon11em,wd,6050lm840,DA2,chang.rel,PMMA



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 07.06.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -


**Order No.:** 51FP10DP460HR | **GTIN (EAN):** 4058352376348

**Planning data:** Mon11em,wd,6050lm840,DA2,chang.rel,PMMA

**51FP10DP460HR: 1x LED**

4058352376348  
51FP10DP460HR

LED 4000 K | CRI ≥ 80  $\phi_{\text{N}}$  6050 lm



$\phi_{\downarrow}$  94%  $\phi_{\uparrow}$  6%

Luminance values (cd/m<sup>2</sup>)

	C 0/180	C 90/270
L <sub>80</sub>	7228	6298
L <sub>70</sub>	8049	8766
L <sub>65</sub>	8431	9662

UGR 25 23.6

X 4H Y 8H  $\rho$  70/50/20 S 0.25H

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 07.06.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -