


Order No.: 59HC91004 | GTIN (EAN): 4058352463222

**Product description:** HB31L,refl,alu,dir,surf



Highbay 31 L, reflector, primary light control with reflector, of aluminium, Alu-Soft, light emission: direct distribution, primary light characteristic: rotationally symmetric, installation type: surface-mounted, diameter: 590mm, height: 250mm, packaging unit: 1 piece

Wt. (kg): 1.5  
GTIN (EAN): 4058352463222



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 24.02.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 59HC91004 | GTIN (EAN): 4058352463222

Detailed technical description: HB31L,refl,alu,dir,surf



#### Key data

- Product type: reflector
- Product name: Highbay 31 L
- Order No.: 59HC91004

#### Lighting technology | Lamps | Control gear

##### Component 1

#### Lighting technology:

- Light control: reflector of aluminium, Alu-Soft
- Beam angle: narrow to wide distribution
- Symmetry: rotationally symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis:  $\leq 22$
- UGR viewing direction along lateral luminaire axis:  $\leq 22$

#### Mounting


- Mounting method, mounting location: surface-mounted, to the luminaire
- Arrangement: single arrangement

#### Dimensions, Weight

- Diameter: 590mm
- Height: 250mm
- Weight: 1.5kg

Order No.: 59HC91004 | GTIN (EAN): 4058352463222

Dimensions: HB31L,refl,alu,dir,surf

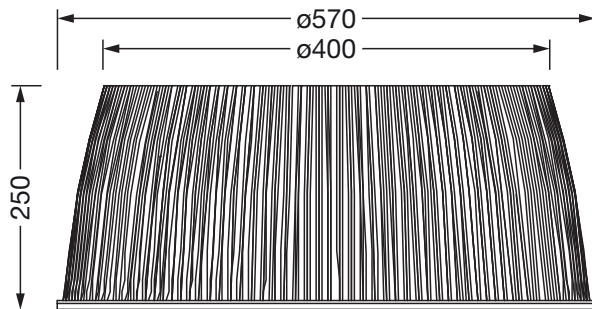

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 24.02.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -