


Photometric test report

Family Silica® 21	Order number: 51MX12DB45WB EAN: 4058352907269	LP number 59266_168
	Version recessed luminaire, reflector, black, direct distribution, wide distribution, UGR≤19 (L65≤1000cd/m²) Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 5400 lm Power consumption = 32.0 W Luminous efficacy = 168.7 lm/W	serial documentation 02.08.2023 

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 719 cd/klm**

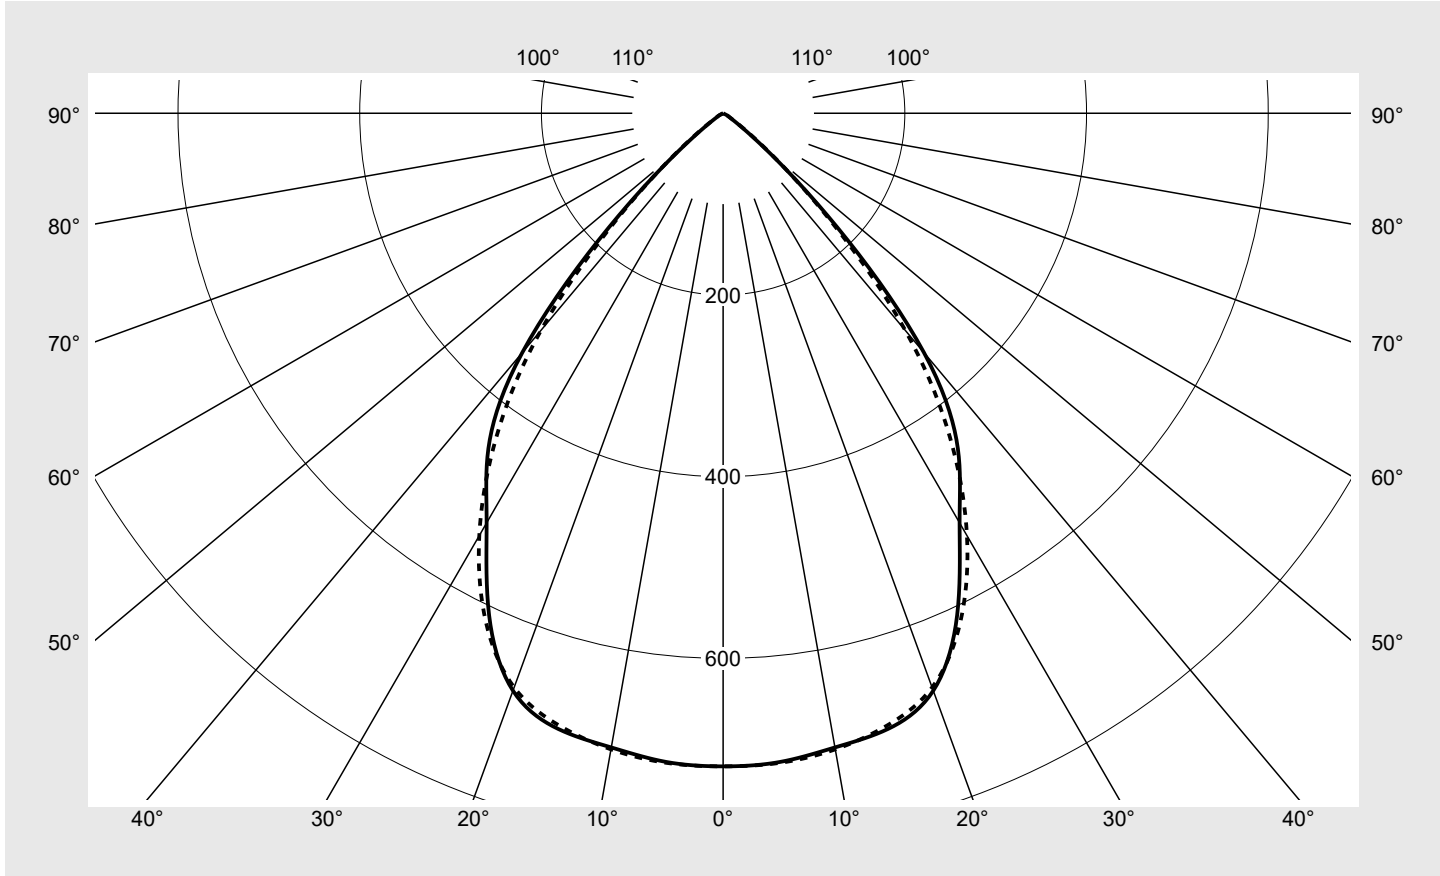

Classifications	
DIN 5040	A 6 0
CIE	N1=86 N2=100 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX12DB45WB EAN: 4058352907269	LP number 59266_168
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	718.8	718.8	718.8	718.8	718.8	718.8	718.8	4.3	4.3
5°	716.8	715.7	712.2	716.2	717.8	715.2	717.7	34.2	38.5
10°	708.8	709.0	703.3	708.6	709.9	707.6	710.9	67.4	105.9
15°	701.5	704.3	697.3	698.3	698.8	696.7	697.6	99.2	205.1
20°	676.3	682.5	681.1	681.0	677.6	673.2	672.5	127.2	332.2
25°	609.5	618.9	627.5	636.4	634.5	625.9	617.8	145.0	477.3
30°	520.6	528.9	533.1	542.9	550.7	541.7	536.8	147.4	624.6
35°	450.5	455.7	444.2	436.3	445.0	443.0	435.2	139.8	764.4
40°	343.9	350.9	343.2	332.9	329.4	321.5	312.0	117.8	882.2
45°	178.2	185.2	190.8	192.2	186.9	176.3	167.1	71.3	953.5
50°	59.7	64.4	73.8	78.7	75.2	68.1	63.7	29.5	983.0
55°	15.6	18.5	24.7	31.2	26.2	20.2	17.4	10.3	993.3
60°	6.1	6.8	9.1	12.2	9.8	7.7	7.0	4.1	997.4
65°	2.1	2.4	3.4	4.3	3.8	3.0	2.8	1.6	999.0
70°	1.4	1.4	1.0	1.0	1.2	1.5	1.5	0.7	999.7
75°	0.3	0.4	0.3	0.4	0.4	0.5	0.4	0.2	999.9
80°	0.0	0.0	0.1	0.1	0.1	0.2	0.2	0.1	999.9
85°	0.0	0.0	0.1	0.1	0.1	0.2	0.2	0.1	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX12DB45WB EAN: 4058352907269	LP number 59266_168
-----------------------------	--	-------------------------------


UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	19.0	20.3	19.4	20.6	21.0	18.9	20.2	19.2	20.5	20.8
	3H	18.9	20.0	19.3	20.4	20.7	18.7	19.9	19.1	20.2	20.6
	4H	18.8	19.9	19.2	20.2	20.6	18.7	19.7	19.1	20.1	20.4
	6H	18.8	19.7	19.2	20.1	20.5	18.6	19.5	19.0	19.9	20.3
	8H	18.8	19.6	19.2	20.0	20.4	18.6	19.4	19.1	19.8	20.2
	12H	18.8	19.5	19.2	19.9	20.3	18.6	19.4	19.0	19.7	20.2
4H	2H	18.9	19.9	19.3	20.2	20.6	18.7	19.7	19.1	20.1	20.4
	3H	18.7	19.5	19.1	19.9	20.4	18.5	19.4	19.0	19.8	20.2
	4H	18.6	19.4	19.1	19.8	20.2	18.4	19.2	18.9	19.6	20.0
	6H	18.5	19.2	19.0	19.6	20.1	18.4	19.0	18.8	19.4	19.9
	8H	18.5	19.1	19.0	19.5	20.0	18.3	18.9	18.8	19.3	19.8
	12H	18.5	19.0	19.0	19.4	19.9	18.3	18.8	18.8	19.2	19.7
8H	4H	18.5	19.1	19.0	19.5	20.0	18.3	18.9	18.8	19.3	19.8
	6H	18.4	18.8	18.9	19.3	19.8	18.2	18.7	18.7	19.2	19.7
	8H	18.3	18.7	18.8	19.2	19.8	18.2	18.6	18.7	19.1	19.6
	12H	18.3	18.6	18.8	19.1	19.7	18.1	18.5	18.7	19.0	19.5
12H	4H	18.5	19.0	19.0	19.4	19.9	18.3	18.8	18.8	19.2	19.7
	6H	18.4	18.7	18.9	19.2	19.8	18.2	18.6	18.7	19.1	19.6
	8H	18.3	18.6	18.8	19.1	19.7	18.1	18.5	18.7	19.0	19.5

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1470		B = 49	
C-planes	0°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°		
γ	Luminance in cd/m ²								
45°	18893.8	19639.4	20224.8	20378.7	19816.4	18686.5	17719.1		
50°	6967.4	7515.8	8602.9	9174.9	8765.7	7944.9	7434.7		
55°	2040.2	2416.2	3223.4	4082.0	3422.4	2643.9	2274.9		
60°	914.5	1022.3	1370.7	1828.8	1475.1	1154.2	1044.6		
65°	373.2	429.1	595.7	753.9	671.6	529.3	489.2		
70°	297.0	310.2	229.3	215.0	259.3	333.6	336.2		
75°	82.6	110.1	89.5	125.7	115.3	137.9	120.5		
80°	20.7	20.7	30.7	46.2	61.7	71.7	82.0		
85°	20.6	36.1	45.6	81.7	117.8	142.8	153.1		

Photometric test report

Family Silica® 21	Order number: 51MX12DB45WB EAN: 4058352907269	LP number 59266_168
------------------------------------	--	--------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

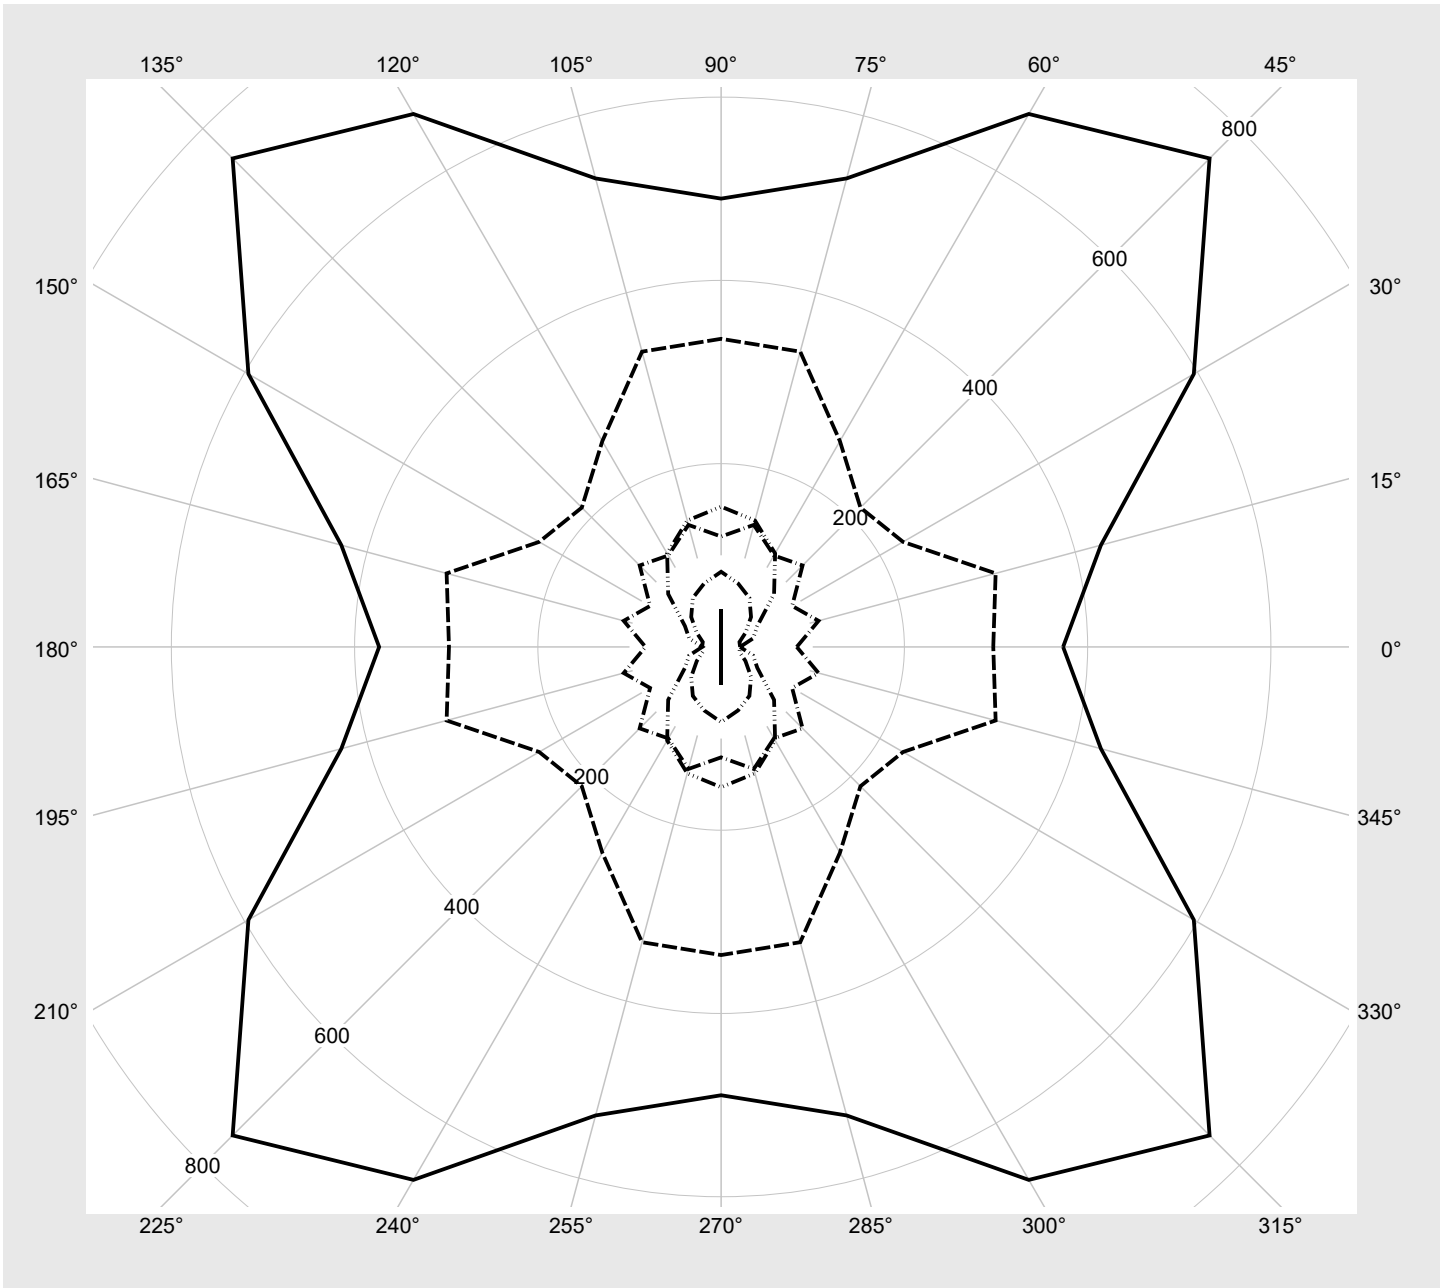

Photometric test report

Family Silica® 21	Order number: 51MX12DB45WB EAN: 4058352907269	LP number 59266_168
-----------------------------	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5400	32.0
95	241	252	5139	30.2
90	227	250	4853	28.4
85	214	248	4589	26.8
80	201	245	4323	25.2
75	188	243	4055	23.5
70	175	240	3785	21.9
65	162	238	3513	20.3
60	149	234	3239	18.7
55	136	231	2962	17.1
50	124	228	2707	15.6
45	111	224	2429	14.0
40	99	219	2170	12.5
35	86	214	1888	11.0
30	74	209	1628	9.6
25	61	202	1343	8.2
20	49	194	1079	6.8
15	37	183	812	5.4
10	25	169	546	4.0
5	13	145	279	2.5
3	8	127	167	1.5