

Photometric test report

Family
LITEPOLE 2

Order number: **5XA5425EF14HP**
EAN: **4058352836576**

LP number
58904_18



Version post-top- or mounting to wall arm
Optic asymmetric, wide distribution (ST1.2a)
Cover cover transparent, PMMA
Lamps LED 3000 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 4760 lm
Power consumption = 33.6 W
Luminous efficacy = 141.7 lm/W

serial
documentation
24.05.2022

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 821 cd/klm

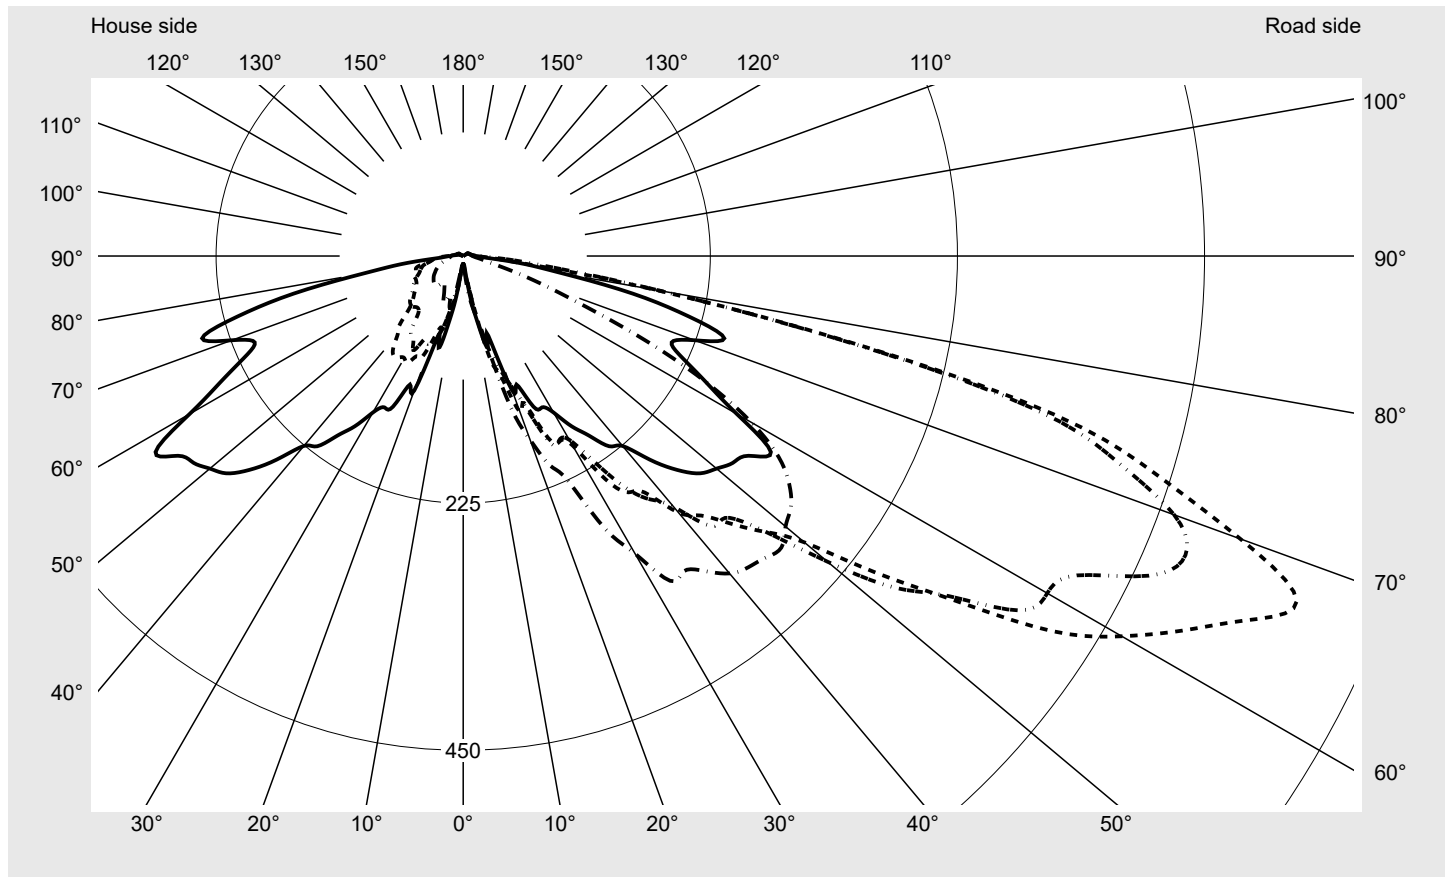

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	97.5%
Eta 90° - 180°	2.5%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	753.0
Imax 80°	194.4
Imax 90°	12.7
Imax >90°	11.4
Imax >95°	8.1


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425EF14HP EAN: 4058352836576	LP number 58904_18
------------------------------------	---	-------------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°**

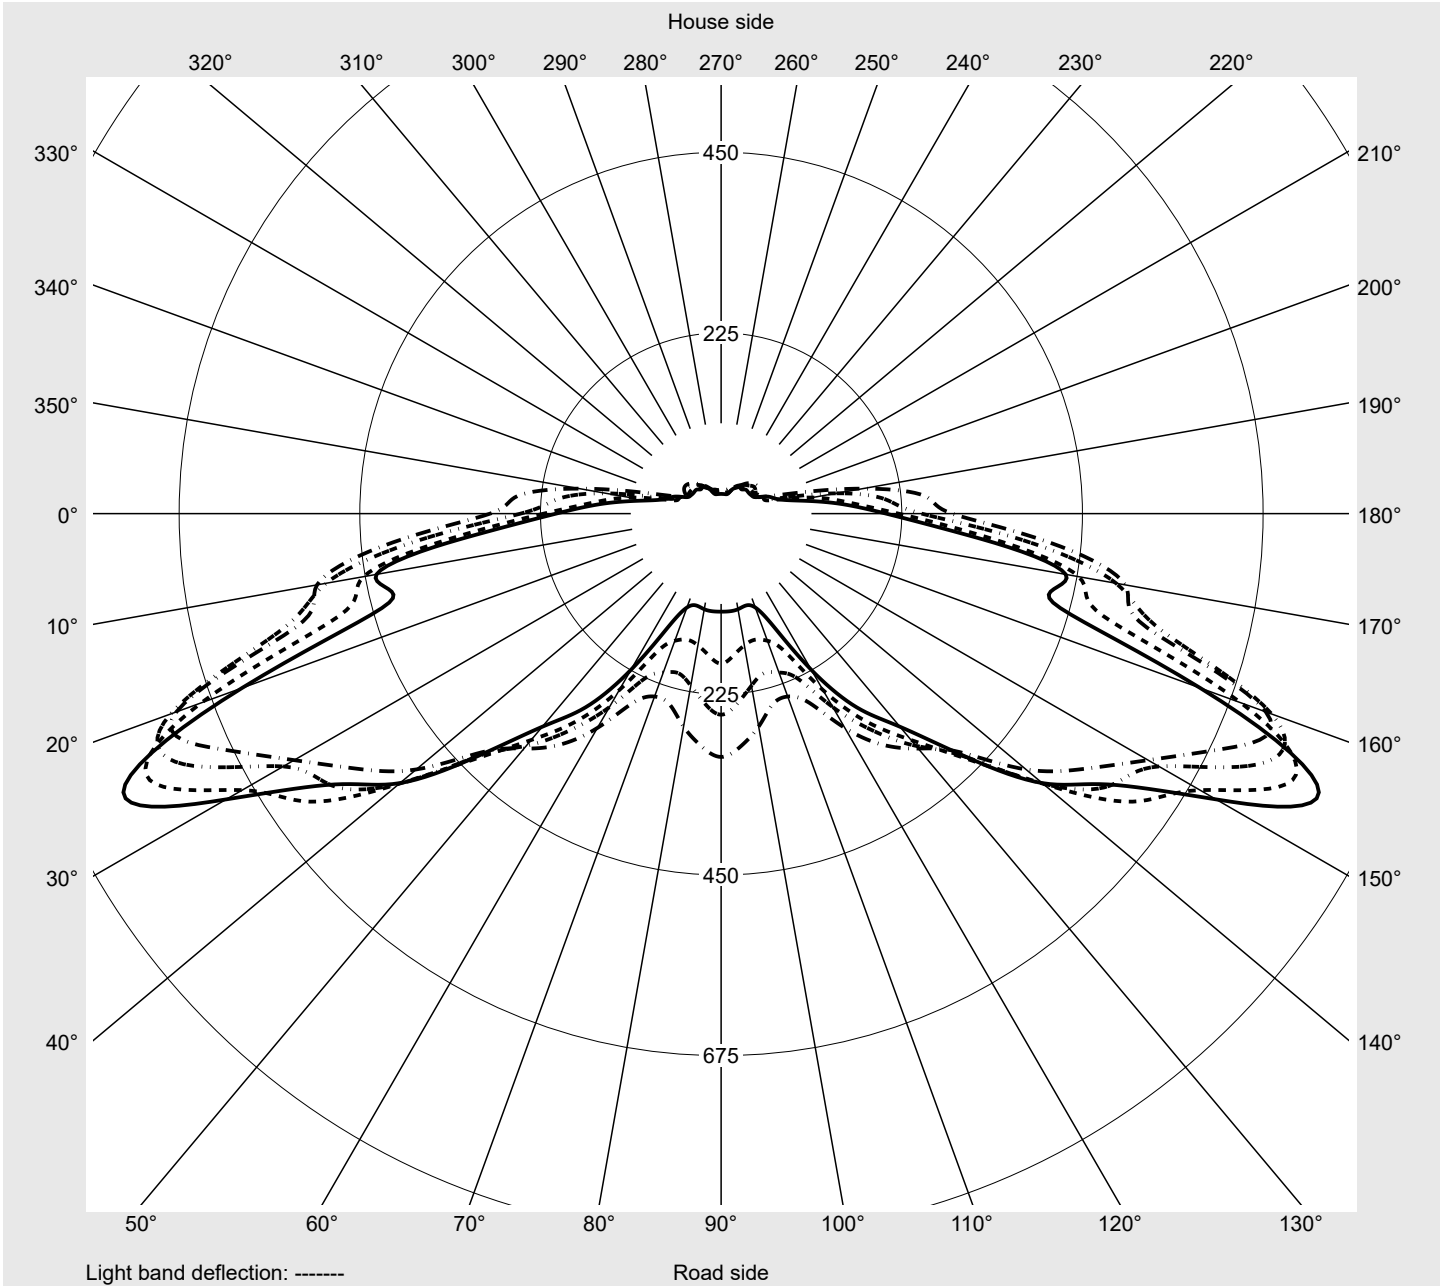

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425EF14HP EAN: 4058352836576	LP number 58904_18
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6
2,5°	7.4	7.4	7.4	7.5	7.5	7.5	7.5	7.7	7.8	7.8	7.8	8.0	8.1
5,0°	8.1	8.4	8.7	9.0	9.3	9.9	10.3	10.6	11.2	11.4	12.0	12.3	12.7
7,5°	13.3	13.7	14.9	16.3	17.7	18.9	20.0	20.4	21.3	21.6	22.3	23.7	25.6
10,0°	40.5	38.1	39.0	36.2	33.0	30.0	28.2	26.9	28.2	30.5	32.5	35.0	39.2
12,5°	65.0	54.4	53.8	52.8	55.9	57.8	61.2	67.3	65.9	64.4	62.1	59.0	59.0
15,0°	86.3	75.1	83.4	79.7	93.6	100.4	85.4	83.7	80.9	87.2	86.9	87.2	88.1
17,5°	76.1	91.8	104.8	95.3	105.8	114.9	104.5	119.7	121.5	109.2	111.2	116.3	123.6
20,0°	130.4	124.6	126.4	143.2	137.6	151.1	124.2	115.9	110.7	118.6	135.8	145.8	153.4
22,5°	126.7	156.7	147.7	137.5	172.2	144.9	149.0	145.9	122.7	128.8	144.6	151.2	167.3
25,0°	151.4	173.1	160.7	164.7	176.5	182.6	187.7	182.9	160.7	152.0	150.2	160.4	179.2
27,5°	155.4	169.3	171.6	160.4	182.9	190.2	189.2	199.0	195.4	184.0	167.8	166.0	201.6
30,0°	164.5	198.2	201.8	201.0	190.1	199.1	193.2	206.2	204.1	215.8	201.0	191.7	212.1
32,5°	183.9	204.4	206.5	225.4	208.9	240.8	222.0	216.1	218.3	228.8	239.3	223.8	242.0
35,0°	199.6	223.2	220.1	224.7	230.2	262.7	257.4	245.7	234.3	256.3	260.5	254.1	266.5
37,5°	218.3	252.3	263.4	249.4	250.0	271.4	279.2	279.4	275.5	265.3	277.3	294.5	297.9
40,0°	225.7	258.4	277.0	282.2	294.3	305.0	298.0	287.8	303.9	308.4	290.9	299.5	318.3
42,5°	251.4	274.1	286.2	299.9	315.6	320.5	333.3	319.7	313.5	324.3	324.5	303.5	326.5
45,0°	275.4	293.0	307.9	312.0	339.2	344.6	337.2	345.6	346.0	339.8	335.7	316.2	339.0
47,5°	292.8	315.2	359.2	332.6	379.3	371.5	369.5	360.1	383.3	360.8	360.7	338.4	339.8
50,0°	301.1	340.1	423.7	350.5	448.5	405.6	433.0	413.7	395.7	373.1	374.1	346.9	336.6
52,5°	309.4	351.2	444.2	384.9	511.0	473.6	496.4	460.5	408.0	377.2	384.0	359.9	336.1
55,0°	317.1	354.3	436.1	429.7	566.0	547.2	539.8	503.0	440.5	393.2	388.0	366.9	332.9
57,5°	332.2	392.5	470.8	508.5	654.0	635.5	600.6	520.9	475.7	403.1	386.0	365.7	328.6
60,0°	287.7	410.1	511.0	549.4	722.0	692.4	614.0	553.9	495.6	420.0	382.0	351.5	308.2
62,5°	249.7	376.6	499.5	571.0	729.8	738.5	629.7	590.8	523.1	427.5	377.5	330.1	278.3
65,0°	220.8	330.5	452.2	492.7	689.0	785.2	688.7	625.4	523.3	431.5	368.1	316.5	253.8
67,5°	205.5	308.6	435.8	427.9	635.0	821.4	711.8	588.0	522.1	425.9	346.5	294.6	224.7
70,0°	224.2	338.7	435.2	464.9	597.2	753.0	688.8	554.5	497.1	397.9	322.8	274.1	193.1
72,5°	249.2	359.9	396.3	467.6	559.6	661.9	625.3	503.3	408.4	351.5	288.2	237.5	157.4
75,0°	212.7	335.6	359.8	411.7	511.8	556.2	538.7	396.0	294.9	256.0	232.4	198.7	131.7
77,5°	158.2	225.3	262.4	317.2	352.1	355.7	350.6	241.4	187.9	175.2	182.7	177.4	115.4
80,0°	93.6	120.8	148.6	187.4	194.4	178.9	182.3	147.8	122.1	105.1	91.8	91.8	58.5
82,5°	57.5	61.5	71.0	99.6	81.4	66.5	88.0	100.5	88.7	55.9	36.2	27.1	19.2
85,0°	25.6	31.0	35.3	44.9	37.8	32.7	48.5	58.2	35.9	27.5	16.0	13.5	12.1
87,5°	17.1	17.4	17.6	17.4	16.1	18.8	22.9	22.6	18.0	15.2	11.5	10.9	10.1
90,0°	12.1	12.0	11.8	11.7	11.4	10.8	10.5	10.2	9.9	9.6	9.3	9.2	8.7
92,5°	10.6	10.8	10.6	10.3	10.2	9.8	9.5	9.3	9.0	8.7	8.4	8.4	8.1
95,0°	9.0	9.2	9.3	9.0	8.7	8.7	8.4	8.1	8.1	8.0	7.8	7.8	7.8
97,5°	8.0	8.1	8.1	8.1	7.8	7.8	7.7	7.5	7.5	7.5	7.2	7.2	7.2
100,0°	7.2	7.4	7.5	7.4	7.2	7.2	7.2	7.1	6.9	6.9	6.9	6.9	6.9
102,5°	6.5	6.8	6.9	6.9	6.9	6.8	6.7	6.7	6.7	6.7	6.7	6.7	6.7
105,0°	6.2	6.4	6.5	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4
107,5°	5.9	5.9	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1
110,0°	5.6	5.6	5.8	5.8	5.9	5.8	5.9	5.9	5.9	5.9	5.9	6.1	6.1
112,5°	5.3	5.5	5.5	5.8	5.6	5.6	5.8	5.8	5.8	5.8	5.8	5.8	5.9

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425EF14HP EAN: 4058352836576	LP number 58904_18
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6
2,5°	8.1	8.1	8.3	8.3	8.3	8.3	7.4	7.4	7.4	7.4	7.4	7.4	7.4
5,0°	13.2	13.3	13.5	13.7	13.6	13.9	8.1	8.1	7.8	7.7	7.7	7.8	7.7
7,5°	26.9	28.2	29.9	30.9	31.2	31.0	12.7	11.8	11.2	11.4	10.9	10.6	10.3
10,0°	41.5	41.5	42.4	44.5	46.4	45.5	42.9	39.9	41.1	36.2	34.7	39.6	33.7
12,5°	59.7	58.1	58.7	60.5	59.4	58.8	57.8	60.0	69.0	57.2	46.6	45.5	46.7
15,0°	94.5	84.7	86.8	88.8	86.8	85.1	67.0	56.6	61.5	61.8	67.1	62.7	67.4
17,5°	121.5	118.1	124.6	133.0	146.5	145.2	79.2	79.4	75.7	73.0	68.1	77.2	78.8
20,0°	156.2	156.5	156.0	158.9	169.5	178.0	112.2	113.5	105.7	84.8	82.6	82.6	73.2
22,5°	181.8	185.5	193.3	195.7	205.9	206.4	132.0	122.4	117.1	105.1	100.5	86.2	70.5
25,0°	185.5	196.7	210.2	227.6	231.0	225.9	133.2	119.4	111.6	106.9	100.7	83.7	71.7
27,5°	210.2	212.0	229.3	247.2	271.1	280.3	152.0	131.1	114.9	115.4	109.5	96.5	71.5
30,0°	223.9	236.5	263.9	284.3	304.4	312.8	174.0	149.9	125.8	113.8	107.3	90.8	68.3
32,5°	267.3	274.2	287.2	295.0	324.3	350.6	178.6	154.6	134.7	129.3	109.4	86.5	66.1
35,0°	278.8	300.2	315.2	318.3	335.0	350.3	198.1	165.3	141.5	136.7	110.6	82.2	65.3
37,5°	292.5	315.6	316.6	323.4	344.6	361.6	223.9	182.6	145.6	138.4	104.2	68.6	67.1
40,0°	305.5	323.1	326.4	336.6	358.0	377.2	237.5	191.9	154.0	139.4	92.7	63.3	66.8
42,5°	320.6	330.4	336.3	348.6	364.5	384.3	265.5	210.3	168.2	144.0	86.3	63.1	68.7
45,0°	344.7	335.0	338.5	353.9	373.1	388.8	295.9	229.1	177.4	138.5	71.8	65.2	70.2
47,5°	342.4	332.7	341.3	359.8	378.3	392.9	304.7	236.8	180.2	123.3	63.7	65.0	70.1
50,0°	335.6	328.2	340.3	355.5	371.8	383.1	301.6	233.4	182.1	101.4	59.3	63.3	67.4
52,5°	316.0	309.8	326.1	341.9	360.5	376.1	304.2	234.4	180.8	83.1	56.2	59.9	63.4
55,0°	295.2	286.0	307.6	326.8	344.4	362.5	304.1	230.0	170.9	67.1	53.1	56.2	60.3
57,5°	280.6	266.4	282.5	302.9	323.7	340.6	295.2	215.5	142.1	62.7	50.7	53.7	58.1
60,0°	260.0	242.4	246.4	269.3	290.2	303.0	254.1	179.2	101.4	63.6	49.1	52.2	56.0
62,5°	227.2	210.6	205.8	217.6	237.0	250.4	205.2	145.6	73.3	59.6	48.3	49.1	52.0
65,0°	190.8	168.5	162.6	166.6	177.2	186.8	159.4	115.3	64.4	55.9	48.0	47.2	47.5
67,5°	155.5	124.5	118.6	120.9	122.1	122.1	145.6	94.2	71.1	61.9	48.5	44.3	43.2
70,0°	131.9	95.0	76.9	78.5	79.2	80.7	150.8	91.9	76.7	63.1	47.6	42.1	38.9
72,5°	103.9	77.8	51.3	47.5	46.4	51.1	158.9	92.5	75.1	56.6	45.2	40.7	36.2
75,0°	81.2	55.0	37.4	32.1	29.4	30.5	108.1	71.1	63.3	47.3	44.6	38.9	34.3
77,5°	60.6	33.4	27.1	22.8	20.8	21.0	86.0	58.7	50.7	42.9	41.1	36.4	32.1
80,0°	31.9	20.8	18.5	16.7	16.3	16.6	56.5	49.5	45.5	39.0	33.0	31.5	28.7
82,5°	16.0	13.9	13.2	12.9	13.0	13.0	40.2	36.4	36.7	31.0	29.3	28.1	25.3
85,0°	11.2	10.6	10.3	10.5	10.6	10.6	23.8	25.0	26.8	26.6	25.1	23.2	20.8
87,5°	9.6	9.3	9.3	9.3	9.5	9.5	18.0	19.8	21.6	21.7	20.5	19.2	17.9
90,0°	8.7	8.4	8.4	8.4	8.4	8.3	12.4	12.7	12.7	12.7	12.7	12.6	12.4
92,5°	8.1	8.1	8.0	7.8	7.8	8.0	11.1	11.2	11.4	11.4	11.4	11.2	11.1
95,0°	7.7	7.5	7.5	7.5	7.4	7.4	9.3	9.3	9.5	9.5	9.3	9.2	9.2
97,5°	7.2	7.2	7.1	7.1	7.1	7.1	8.1	8.1	8.1	8.0	7.8	7.8	7.7
100,0°	6.9	6.9	6.9	6.8	6.8	6.8	7.2	7.2	7.2	7.1	6.9	6.8	6.8
102,5°	6.7	6.7	6.7	6.7	6.7	6.5	6.7	6.7	6.7	6.5	6.4	6.2	6.2
105,0°	6.4	6.4	6.4	6.4	6.5	6.2	6.2	6.1	6.1	5.9	5.9	5.8	5.6
107,5°	6.2	6.2	6.2	6.2	6.2	6.2	5.8	5.8	5.8	5.6	5.5	5.3	5.3
110,0°	6.1	6.1	6.2	6.1	6.2	6.2	5.5	5.5	5.5	5.3	5.2	5.0	5.0
112,5°	5.9	5.9	5.9	5.9	5.9	5.9	5.2	5.2	5.2	5.0	5.0	4.7	4.7

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425EF14HP EAN: 4058352836576	LP number 58904_18
Table of values for luminous intensities		Maximum luminous intensity
		sitEco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	0.0	0.0
2,5°	7.4	7.4	7.4	7.5	7.7	7.7	7.5	7.5	7.7	7.5	7.4	0.1	0.1
5,0°	7.7	7.7	7.7	7.8	8.0	7.8	7.8	7.8	7.7	7.8	8.0	0.2	0.3
7,5°	10.1	9.8	9.5	9.5	9.3	9.3	9.5	9.3	9.3	9.3	9.2	0.6	0.9
10,0°	29.3	26.6	23.7	23.5	22.6	20.0	20.5	18.3	17.6	17.0	17.4	1.6	2.5
12,5°	43.5	38.4	31.0	31.8	32.4	34.9	37.5	39.2	39.8	39.9	42.3	3.1	5.6
15,0°	51.7	50.4	45.2	44.6	40.1	39.6	40.2	40.4	43.0	46.7	48.2	5.0	10.5
17,5°	77.6	60.6	53.4	49.5	48.9	47.3	47.2	43.0	40.7	38.0	38.4	7.3	17.8
20,0°	62.1	55.3	49.8	48.9	48.6	46.7	47.2	43.9	42.6	40.2	40.2	9.8	27.6
22,5°	57.5	47.2	43.8	43.2	41.7	41.1	41.7	42.6	43.8	46.7	45.8	12.1	39.7
25,0°	56.0	41.5	40.4	37.8	37.5	38.4	39.9	40.7	41.4	41.7	42.3	14.5	54.2
27,5°	51.3	40.2	37.7	37.5	35.8	36.2	38.6	38.7	39.2	38.3	37.5	17.0	71.3
30,0°	51.4	47.2	40.8	37.8	36.8	36.7	37.5	36.2	35.3	34.6	34.3	20.1	91.4
32,5°	56.3	52.0	46.6	42.7	39.3	38.1	37.5	34.6	33.1	32.1	31.6	23.6	115.0
35,0°	63.7	56.8	49.2	43.9	40.2	38.4	36.8	34.1	32.2	30.9	30.2	27.1	142.1
37,5°	68.6	61.6	54.8	49.2	44.8	41.1	38.7	35.5	33.0	31.3	30.5	30.8	172.9
40,0°	68.9	61.9	55.7	50.7	46.6	43.3	40.4	38.0	35.9	34.7	34.6	34.4	207.3
42,5°	69.0	62.4	55.4	50.1	46.1	43.3	40.8	38.6	37.0	36.5	36.7	38.0	245.3
45,0°	70.8	63.7	57.7	51.7	47.0	43.2	40.5	38.9	37.0	36.2	36.4	41.6	286.9
47,5°	71.0	64.3	57.5	52.8	48.0	43.8	40.8	38.6	36.8	36.1	36.1	45.3	332.2
50,0°	68.4	61.9	55.9	51.3	46.9	43.2	40.4	38.1	36.2	35.5	35.2	48.8	381.0
52,5°	64.6	59.6	54.0	49.5	45.1	41.4	39.2	37.1	35.0	34.0	34.0	51.9	433.0
55,0°	62.1	57.8	52.5	47.7	43.6	39.6	37.0	35.5	33.9	33.0	32.8	54.6	487.6
57,5°	59.4	55.9	51.1	45.4	41.4	37.3	34.4	33.6	32.4	31.6	31.3	57.9	545.5
60,0°	56.0	53.2	49.1	43.5	39.9	35.3	31.9	31.0	30.0	29.6	29.6	58.9	604.4
62,5°	52.6	49.4	46.6	42.9	38.0	34.3	29.9	29.1	28.2	28.1	28.1	57.9	662.3
65,0°	47.2	45.4	42.0	42.6	37.8	33.9	27.9	27.2	26.5	26.3	26.3	55.5	717.8
67,5°	43.0	42.4	39.5	40.1	37.1	33.6	27.2	25.0	24.7	24.5	24.5	52.8	770.6
70,0°	39.6	38.9	38.7	37.7	34.0	33.1	25.6	22.6	22.2	22.2	22.5	50.7	821.3
72,5°	35.0	34.4	34.6	34.3	33.1	28.4	24.4	21.0	20.1	20.1	20.4	46.6	867.9
75,0°	31.5	31.3	31.8	30.9	28.4	24.2	22.0	19.5	18.0	18.0	18.3	39.4	907.3
77,5°	28.7	28.4	26.8	25.4	22.8	19.7	18.3	16.7	16.3	16.1	16.6	28.6	935.9
80,0°	25.7	23.4	21.7	20.7	18.6	16.4	15.8	14.9	14.6	14.5	14.5	17.3	953.3
82,5°	23.2	20.3	18.2	16.9	16.6	15.8	15.1	14.0	13.5	13.3	13.3	10.0	963.3
85,0°	18.9	17.0	15.8	14.9	14.6	14.3	13.7	13.2	12.6	12.6	12.1	6.1	969.4
87,5°	16.3	15.1	14.0	13.3	13.0	12.9	12.3	12.1	11.8	11.8	11.5	4.1	973.5
90,0°	12.3	12.3	12.0	11.7	11.7	11.4	11.2	11.2	11.1	10.9	10.9	3.0	976.5
92,5°	10.9	10.9	10.8	10.8	10.5	10.5	10.3	10.3	10.2	10.1	10.1	2.7	979.3
95,0°	9.0	8.9	8.9	8.7	8.6	8.4	8.3	8.3	8.1	8.1	8.0	2.3	981.6
97,5°	7.7	7.4	7.4	7.2	7.1	7.1	6.8	6.8	6.8	6.7	6.5	2.0	983.6
100,0°	6.8	6.5	6.5	6.4	6.2	6.1	5.9	5.9	5.9	5.6	5.6	1.8	985.4
102,5°	6.1	5.9	5.9	5.6	5.6	5.3	5.3	5.3	5.0	5.0	5.0	1.7	987.1
105,0°	5.6	5.5	5.3	5.3	5.0	5.0	4.9	4.7	4.7	4.7	4.7	1.6	988.7
107,5°	5.2	5.0	5.0	5.0	4.7	4.7	4.7	4.4	4.4	4.4	4.4	1.5	990.2
110,0°	4.9	4.7	4.7	4.7	4.4	4.4	4.4	4.1	4.1	4.1	4.1	1.4	991.5
112,5°	4.7	4.6	4.4	4.4	4.4	4.1	4.1	4.1	4.1	4.0	3.8	1.3	992.9

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425EF14HP EAN: 4058352836576	LP number 58904_18
------------------------------------	---	-------------------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
---	-----------------------------------	---------------

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	5.0	5.2	5.5	5.5	5.5	5.5	5.5	5.5	5.5	5.6	5.6	5.6	5.8
117,5°	4.9	5.0	5.2	5.2	5.2	5.2	5.2	5.3	5.3	5.3	5.3	5.5	5.6
120,0°	4.6	4.9	4.9	4.9	4.9	5.0	5.0	5.0	5.0	5.0	5.2	5.3	5.3
122,5°	4.3	4.3	4.4	4.4	4.4	4.6	4.6	4.7	4.7	4.7	4.7	4.7	5.0
125,0°	3.5	3.5	3.5	3.7	3.8	3.8	3.8	3.8	3.8	3.8	4.0	4.1	4.1
127,5°	2.5	2.4	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.8
130,0°	1.8	1.6	1.6	1.6	1.6	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.8
132,5°	1.5	1.5	1.5	1.5	1.5	1.5	1.3	1.5	1.3	1.2	1.3	1.3	1.3
135,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
137,5°	1.2	1.2	1.0	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
140,0°	0.9	0.9	0.9	0.9	0.9	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.6
142,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.4	0.4	0.4	0.3	0.3
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425EF14HP EAN: 4058352836576	LP number 58904_18
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	5.8	5.8	5.9	5.9	5.9	5.9	5.0	5.0	4.9	4.9	4.7	4.7	4.6
117,5°	5.6	5.6	5.6	5.6	5.6	5.6	4.9	4.7	4.7	4.7	4.4	4.4	4.4
120,0°	5.3	5.3	5.3	5.6	5.6	5.6	4.6	4.6	4.4	4.4	4.3	4.1	4.1
122,5°	5.0	5.0	5.0	5.2	5.0	5.0	4.3	4.1	4.1	4.1	3.8	3.8	3.8
125,0°	4.1	4.1	4.3	4.3	4.4	4.4	3.4	3.5	3.3	3.3	3.3	3.3	3.3
127,5°	2.8	3.0	3.0	3.0	3.0	3.0	2.5	2.5	2.4	2.4	2.4	2.4	2.4
130,0°	1.6	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
132,5°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
135,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.3	1.3	1.2	1.3	1.5	1.5	1.5
137,5°	0.9	0.9	0.9	0.9	0.9	0.9	1.2	1.2	1.2	1.2	1.2	1.2	1.2
140,0°	0.6	0.6	0.6	0.6	0.6	0.6	0.9	0.9	0.9	0.9	0.9	0.9	1.0
142,5°	0.3	0.3	0.3	0.3	0.3	0.3	0.6	0.6	0.7	0.7	0.7	0.9	0.9
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425EF14HP EAN: 4058352836576	LP number 58904_18
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	4.4	4.4	4.4	4.1	4.1	4.1	3.8	3.8	3.8	3.8	3.8	1.2	994.1
117,5°	4.1	4.1	4.1	4.0	3.8	3.8	3.8	3.7	3.7	3.5	3.5	1.2	995.3
120,0°	4.1	4.0	3.8	3.8	3.8	3.7	3.5	3.5	3.5	3.5	3.5	1.1	996.4
122,5°	3.8	3.7	3.5	3.5	3.5	3.4	3.4	3.3	3.3	3.3	3.3	1.0	997.3
125,0°	3.3	3.1	3.1	3.0	3.0	2.8	2.8	2.8	2.7	2.7	2.7	0.8	998.1
127,5°	2.4	2.4	2.2	2.2	2.2	2.2	2.1	2.1	2.1	2.1	2.1	0.5	998.7
130,0°	1.8	1.8	1.8	1.8	1.8	1.8	1.6	1.6	1.5	1.5	1.5	0.4	999.0
132,5°	1.5	1.6	1.6	1.6	1.6	1.6	1.5	1.5	1.5	1.5	1.5	0.3	999.3
135,0°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.2	1.2	1.2	1.2	0.2	999.6
137,5°	1.2	1.2	1.3	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.2	999.8
140,0°	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.1	999.9
142,5°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.7	0.6	0.1	1000.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425EF14HP EAN: 4058352836576	LP number 58904_18
-----------------------------	---	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4760	33.6	35.9	34.8
95	241	252	4516	31.3	33.5	32.4
90	229	250	4291	29.4	31.4	30.4
85	216	248	4048	27.3	29.2	28.2
80	203	246	3804	25.4	27.1	26.2
75	190	243	3561	23.5	25.1	24.3
70	178	241	3336	21.9	23.3	22.6
65	165	238	3092	20.1	21.4	20.8
60	152	235	2849	18.4	19.5	19.0
55	140	232	2624	16.8	17.9	17.4
50	127	229	2380	15.2	16.2	15.7
45	114	225	2136	13.7	14.5	14.1
40	102	221	1911	12.2	13.0	12.6
35	89	216	1668	10.7	11.3	11.0
30	76	210	1424	9.2	9.7	9.4
25	63	203	1181	7.8	8.2	8.0
20	51	195	956	6.6	6.9	6.8
15	38	184	712	5.2	5.5	5.4
11	28	173	525	4.1	4.4	4.2