
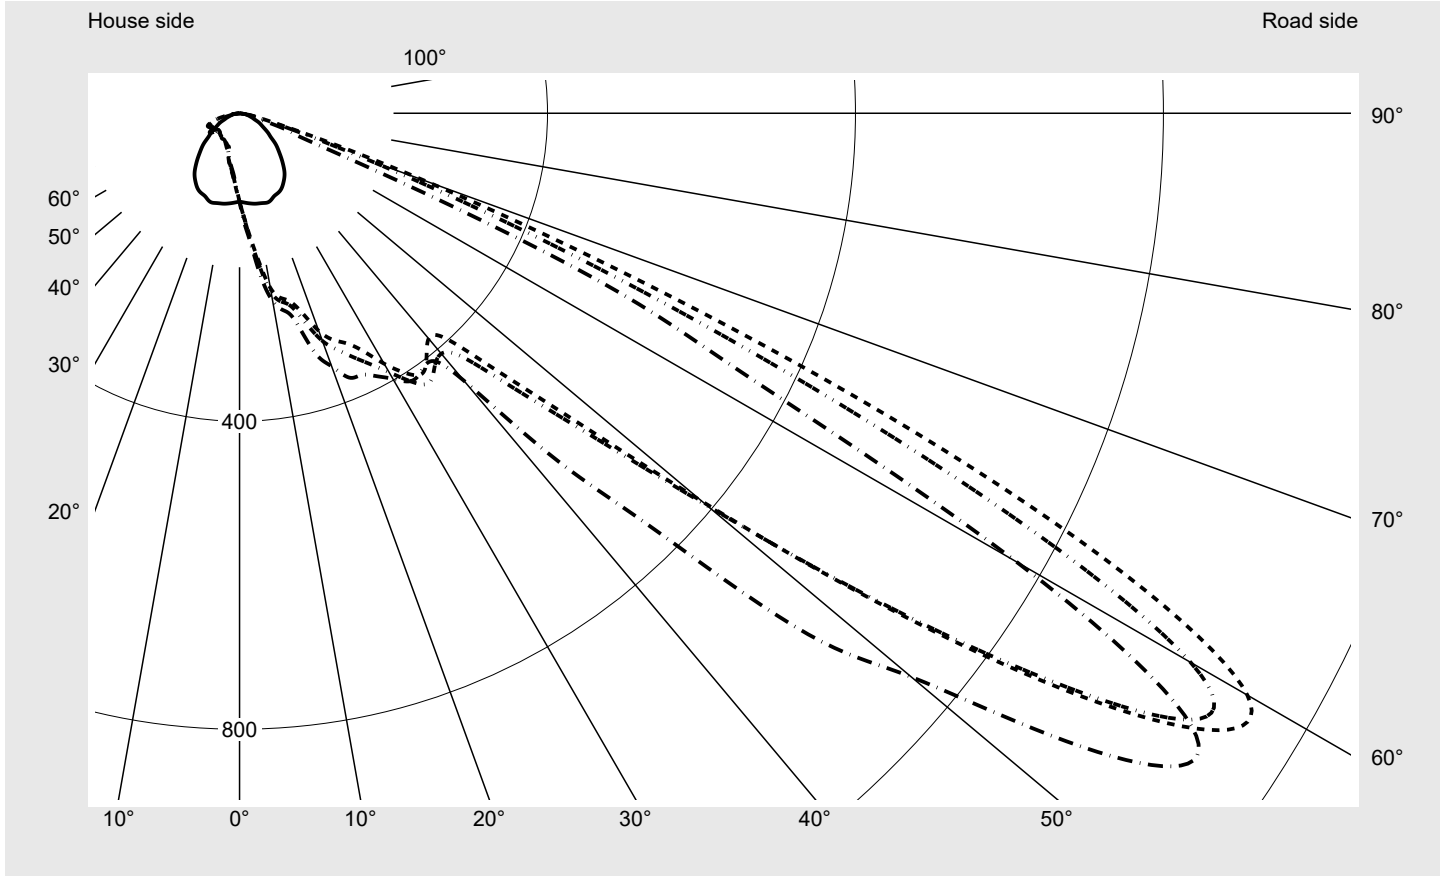


# Photometric test report

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779416F01BA</b> <b>EAN: 4058352851265</b>	<b>LP number</b> <b>59254_86</b>
	<b>Version</b> standard bracket <b>Optic</b> asymmetric distribution PL33T <b>Cover</b> toughened safety glass <b>Lamps</b> LED 4000 K   CRI ≥ 70 <b>Controlgear</b> ECG-DALI <b>Rated values</b> Ta = 10 °C Net luminous flux = 91200 lm Power consumption = 663.7 W Luminous efficacy = 137.4 lm/W	<b>serial documentation</b> <b>02.11.2023</b>



**Luminous intensity in cd/klm** C180-0 C240-60 C245-65 C270-90 **Imax: 1512 cd/klm**




Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	293.1
Imax 80°	14.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Photometric test report**

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779416F01BA</b> <b>EAN: 4058352851265</b>	<b>LP number</b> <b>59254_86</b>
---	--	-------------------------------------

**Envelope curve in cd/klm**      **KMK 60°**    **KMK 57.5°**    **KMK 55°**    **KMK 52.5°**      **siteco**

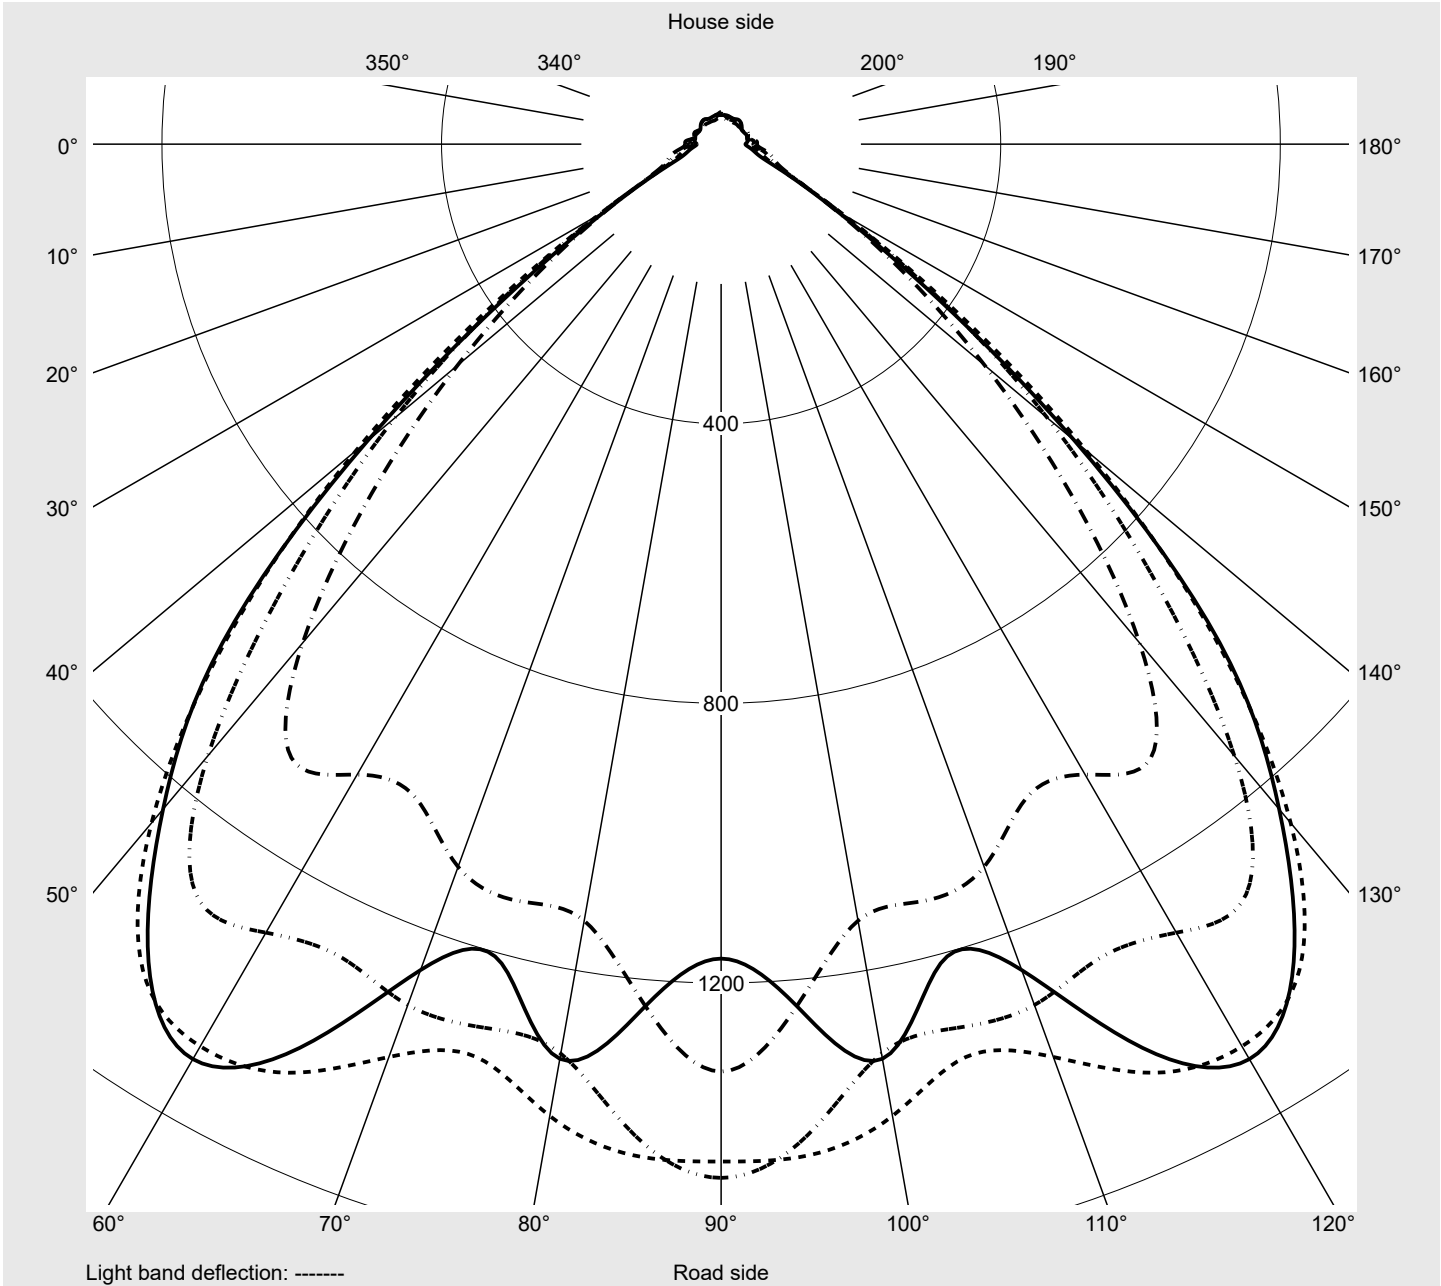

## Photometric test report

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779416F01BA</b> <b>EAN: 4058352851265</b>	<b>LP number</b> <b>59254_86</b>
---	--	-------------------------------------

**siteco**

### Table of values for luminous intensities Maximum luminous intensity

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1
2,5°	115.9	117.8	119.7	121.5	123.4	125.2	127.0	128.8	130.5	131.9	133.2	134.2	135.3
5,0°	117.1	121.3	125.6	129.8	134.2	138.3	142.4	146.4	150.1	153.5	156.8	159.9	162.8
7,5°	118.3	124.1	130.4	136.4	142.6	148.8	155.3	162.1	168.8	175.4	182.2	189.0	195.4
10,0°	119.3	126.8	134.5	142.4	151.3	160.9	171.1	181.6	192.6	203.6	214.1	223.0	230.3
12,5°	119.8	129.0	139.4	150.3	162.7	175.1	187.4	200.1	212.5	223.0	231.9	239.5	245.6
15,0°	120.7	131.9	144.3	157.2	170.3	183.2	196.8	209.8	221.1	230.4	238.2	245.7	253.1
17,5°	121.5	133.8	147.1	160.7	173.9	188.6	203.4	216.6	227.5	236.8	246.9	259.4	272.5
20,0°	119.8	133.6	147.5	161.2	176.3	193.1	210.5	225.9	238.6	250.8	266.8	284.5	300.8
22,5°	116.8	131.1	146.6	161.5	178.5	197.9	218.3	235.9	249.3	265.0	286.2	304.9	318.7
25,0°	115.3	128.1	142.9	160.9	179.9	199.8	221.6	240.6	253.5	271.5	293.5	312.2	329.9
27,5°	113.7	125.3	137.4	158.3	178.2	198.8	220.7	242.0	257.3	277.0	300.8	326.5	348.4
30,0°	110.6	122.0	132.5	153.9	175.5	195.6	219.8	248.1	269.8	294.7	324.9	355.7	375.6
32,5°	106.2	118.6	127.7	149.6	171.9	193.1	222.3	256.7	284.7	313.1	348.5	381.3	399.7
35,0°	101.5	113.9	123.3	144.5	166.4	191.2	224.8	260.7	291.8	321.5	358.8	390.8	413.1
37,5°	95.8	106.4	118.0	137.5	159.7	186.2	223.8	257.5	285.2	314.5	349.5	379.3	399.0
40,0°	88.4	96.3	109.5	127.9	150.5	179.8	220.9	250.8	275.3	305.2	341.3	364.0	382.1
42,5°	81.0	87.2	100.4	118.1	139.5	173.8	220.1	250.3	278.2	318.0	358.6	378.8	396.9
45,0°	73.5	78.9	93.2	111.7	132.2	169.5	220.8	256.6	301.2	362.9	416.9	458.3	472.5
47,5°	66.9	72.2	87.1	103.0	121.1	156.3	209.4	261.0	334.8	427.1	526.9	585.7	591.5
50,0°	59.9	61.5	73.3	85.5	98.0	128.1	188.1	269.9	388.8	533.6	698.5	798.8	784.9
52,5°	51.4	55.5	67.8	77.4	87.6	117.4	189.0	316.2	492.3	707.7	931.2	1071.9	1041.5
55,0°	46.1	50.5	62.6	70.6	82.4	114.7	200.7	369.8	609.3	871.2	1142.3	1309.8	1302.6
57,5°	40.2	43.9	54.3	62.0	75.5	111.5	202.5	390.4	681.2	999.1	1267.7	1442.4	1490.3
60,0°	34.9	38.5	45.2	52.9	69.0	109.8	191.1	356.9	660.3	1008.6	1242.1	1428.2	1511.5
62,5°	30.9	33.3	37.7	44.9	59.8	97.7	158.8	278.0	512.4	813.0	1008.6	1237.1	1295.6
65,0°	26.8	28.7	32.7	39.5	49.3	73.0	115.3	190.6	336.2	538.9	731.9	943.1	924.7
67,5°	21.4	22.4	26.6	32.5	40.3	52.1	74.3	113.3	187.7	307.0	459.4	575.1	534.1
70,0°	18.4	18.3	20.4	27.2	35.3	42.2	54.2	70.0	98.5	151.6	233.9	293.1	253.9
72,5°	15.1	15.5	16.6	21.9	28.1	33.3	38.7	45.1	54.2	70.0	91.0	111.2	98.9
75,0°	12.7	13.1	13.5	16.2	20.2	22.7	25.8	26.8	30.7	34.4	39.7	46.0	41.9
77,5°	10.1	10.8	11.0	12.3	14.2	15.1	15.9	16.2	17.8	19.7	22.3	24.9	23.6
80,0°	8.4	8.0	8.3	9.8	9.4	9.6	9.4	9.8	10.8	11.4	13.1	13.8	13.3
82,5°	7.0	5.9	5.3	6.3	6.1	5.6	5.1	5.5	5.8	6.2	7.1	7.3	6.9
85,0°	3.7	3.0	2.5	2.5	2.4	2.3	2.4	2.4	2.4	2.7	3.0	3.1	3.0
87,5°	0.8	0.7	0.7	0.7	0.7	0.8	0.9	0.9	1.0	1.1	1.1	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779416F01BA</b> <b>EAN: 4058352851265</b>	<b>LP number</b> <b>59254_86</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

**siteco**

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1
2,5°	136.2	136.9	137.5	138.0	138.4	142.8	114.0	112.3	110.6	109.1	107.4	106.0	104.6
5,0°	165.4	167.6	169.5	171.1	172.2	171.0	113.1	109.5	106.2	103.1	100.1	97.4	95.0
7,5°	201.0	205.3	208.7	211.4	213.4	215.0	112.7	107.4	102.5	98.0	94.0	90.4	87.2
10,0°	236.0	240.3	243.5	245.8	247.5	247.6	112.1	105.5	99.3	93.5	88.3	84.2	80.7
12,5°	250.6	254.2	257.0	259.0	260.5	262.0	111.2	103.1	95.7	89.2	83.4	79.0	75.2
15,0°	259.9	265.8	271.3	275.8	279.2	278.8	110.3	100.9	92.7	84.9	78.0	72.5	68.3
17,5°	285.5	297.2	307.1	314.2	319.2	326.4	109.2	97.1	87.1	79.6	73.0	67.5	63.4
20,0°	314.7	325.4	334.0	341.6	348.0	349.8	105.4	93.1	83.4	75.1	68.0	63.2	59.8
22,5°	332.6	346.4	355.5	362.2	367.7	371.6	103.2	90.0	78.9	70.2	63.8	59.2	54.4
25,0°	349.6	366.6	373.1	374.0	374.3	375.0	100.0	85.6	75.1	66.7	60.4	54.2	50.4
27,5°	367.3	384.2	392.0	390.8	385.7	384.9	95.1	80.6	71.4	63.5	56.4	50.9	48.3
30,0°	388.4	402.0	408.5	405.1	400.6	398.3	90.6	76.8	67.6	60.3	52.7	49.0	46.5
32,5°	412.6	421.2	419.2	410.7	409.5	412.7	86.7	73.1	63.8	55.8	50.5	47.5	45.2
35,0°	428.1	430.1	422.3	413.7	409.5	410.4	81.8	68.6	59.9	52.5	48.9	46.0	43.9
37,5°	416.0	425.5	416.3	408.9	404.6	406.4	77.3	64.4	54.5	49.5	47.0	44.4	41.9
40,0°	407.7	426.0	429.6	432.6	448.4	453.6	72.2	59.3	50.5	47.0	44.7	43.3	41.0
42,5°	430.0	468.1	493.4	521.0	564.8	614.1	67.5	54.0	47.4	44.9	43.5	41.8	40.0
45,0°	506.8	568.7	617.4	667.9	736.7	770.1	63.9	50.2	44.9	43.1	41.9	40.2	39.1
47,5°	619.7	699.6	761.5	806.6	904.7	1001.9	59.8	47.0	42.7	41.3	40.7	39.2	38.1
50,0°	792.7	875.4	920.3	947.6	1059.0	1139.0	55.3	44.0	39.8	39.7	39.2	37.8	36.6
52,5°	1032.6	1100.3	1120.9	1128.1	1238.5	1326.8	50.6	42.4	38.7	38.9	38.1	36.6	35.8
55,0°	1284.2	1310.6	1308.7	1321.2	1422.9	1478.9	47.3	42.0	40.0	41.0	41.2	38.2	37.2
57,5°	1465.8	1389.8	1352.1	1411.8	1451.9	1455.5	42.5	40.2	39.8	40.9	39.4	38.4	36.9
60,0°	1426.5	1257.4	1213.4	1328.7	1237.4	1165.2	37.7	37.8	38.2	38.5	37.2	36.4	36.3
62,5°	1124.2	952.3	945.6	1015.6	907.5	758.4	32.6	35.1	36.2	35.5	35.2	35.0	35.6
65,0°	735.3	603.2	614.9	613.5	555.9	513.8	29.2	32.1	33.4	32.9	32.3	33.3	35.5
67,5°	404.6	331.1	313.7	259.8	206.8	151.5	25.9	27.8	29.6	28.7	30.2	31.6	34.3
70,0°	183.2	158.3	140.3	92.9	73.1	71.8	20.7	21.8	22.6	24.0	27.9	28.8	31.4
72,5°	77.7	68.3	56.4	42.9	38.2	35.3	16.4	17.8	19.1	20.5	24.8	25.7	26.6
75,0°	37.3	34.1	29.2	25.1	22.7	23.4	13.2	14.6	15.6	17.3	20.5	21.5	21.5
77,5°	21.7	20.1	17.6	15.8	14.7	13.9	10.4	11.6	12.6	13.5	15.4	17.0	16.4
80,0°	11.9	11.2	10.4	9.9	9.5	9.7	8.1	8.6	9.0	9.9	10.8	12.4	12.4
82,5°	6.1	5.9	5.8	5.6	5.6	5.4	6.2	6.7	6.8	7.0	7.8	8.3	8.9
85,0°	2.9	2.9	2.9	2.8	2.8	2.9	3.3	3.0	3.5	3.3	3.2	3.5	3.7
87,5°	1.3	1.3	1.3	1.4	1.4	1.4	0.7	0.8	0.9	1.0	1.0	1.1	1.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

Family <b>Floodlight FL11</b>	Order number: <b>5XA779416F01BA</b> EAN: <b>4058352851265</b>	LP number <b>59254_86</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	0.2	0.2
2,5°	103.3	102.1	100.9	99.9	99.0	98.3	97.7	97.3	97.0	96.7	96.6	1.4	1.6
5,0°	92.7	90.7	88.9	87.4	86.1	85.0	84.1	83.3	82.8	82.3	82.2	2.9	4.5
7,5°	84.5	82.1	80.1	78.4	76.9	75.8	74.9	74.3	73.9	73.6	73.5	4.7	9.1
10,0°	77.7	75.3	73.2	71.4	69.9	68.8	68.0	67.5	67.3	67.1	67.1	6.6	15.7
12,5°	72.0	69.2	67.0	65.2	63.9	63.0	62.6	62.4	62.2	61.9	61.7	8.5	24.2
15,0°	65.1	62.2	59.6	57.8	56.6	55.2	53.8	53.0	52.6	52.5	52.5	10.2	34.5
17,5°	60.4	57.7	54.7	51.7	50.6	50.0	49.1	48.2	46.8	46.1	45.9	12.3	46.8
20,0°	56.1	51.9	49.8	48.9	48.2	47.1	46.5	45.5	45.1	44.9	44.9	14.6	61.4
22,5°	50.6	48.6	47.4	46.3	45.4	44.5	43.6	43.1	43.1	43.1	43.1	16.8	78.2
25,0°	48.3	46.7	44.9	43.9	43.0	41.8	41.3	41.2	41.3	41.5	41.9	18.7	96.9
27,5°	46.3	44.4	42.8	41.9	40.1	39.8	39.8	39.8	40.1	40.8	40.9	20.7	117.7
30,0°	44.9	42.5	41.4	39.6	39.0	38.7	38.7	38.8	39.1	39.6	39.8	23.0	140.7
32,5°	42.8	41.6	40.5	38.7	38.0	38.0	38.1	38.4	38.9	39.3	39.7	25.3	166.0
35,0°	41.7	40.8	39.1	38.2	38.0	38.0	37.9	38.3	39.2	39.9	39.9	27.2	193.2
37,5°	41.2	40.4	38.9	38.2	38.2	38.1	38.2	38.3	38.4	38.7	38.9	28.2	221.3
40,0°	40.5	39.4	38.4	38.1	38.0	37.7	37.7	37.7	38.0	38.4	38.6	29.5	250.8
42,5°	39.5	38.5	37.4	37.2	37.0	37.0	37.1	37.1	37.4	38.4	37.8	33.0	283.9
45,0°	38.8	37.7	36.5	36.3	36.0	36.1	36.3	36.4	36.8	37.3	37.7	39.5	323.4
47,5°	36.8	36.2	36.2	35.5	35.2	35.2	35.5	35.7	36.4	36.1	40.5	47.9	371.2
50,0°	35.8	34.8	35.3	35.7	34.9	34.8	35.1	34.9	35.9	37.0	35.8	58.3	429.6
52,5°	36.1	35.5	35.9	35.8	35.4	35.3	35.3	35.2	36.5	37.5	37.4	73.4	503.0
55,0°	36.8	37.5	38.4	39.5	38.7	37.7	37.4	37.9	39.8	42.1	43.7	89.3	592.2
57,5°	37.8	40.4	41.8	42.8	41.3	40.1	40.2	41.0	42.5	43.9	46.0	98.7	691.0
60,0°	38.3	40.9	42.4	42.7	41.4	40.4	40.7	41.5	42.0	41.7	41.5	95.6	786.5
62,5°	38.5	41.4	43.6	42.8	41.5	41.1	42.1	42.4	40.9	39.6	39.1	78.4	865.0
65,0°	38.9	42.2	43.9	43.2	42.3	43.1	44.6	43.3	41.2	39.1	40.2	55.8	920.7
67,5°	38.1	41.4	42.4	42.4	43.0	44.6	44.7	43.1	40.9	40.6	40.3	33.0	953.7
70,0°	34.7	37.9	36.2	38.0	40.2	42.8	43.5	41.9	40.7	40.0	39.1	18.6	972.3
72,5°	27.3	28.5	30.5	33.0	36.3	38.1	39.3	37.1	35.0	34.4	30.3	10.5	982.8
75,0°	21.5	22.7	25.0	27.9	31.1	33.0	31.5	27.7	25.5	23.7	22.1	6.7	989.5
77,5°	16.4	15.9	18.5	19.9	24.2	24.4	23.3	21.2	17.3	13.8	12.4	4.5	994.0
80,0°	10.3	10.5	12.0	12.9	13.4	14.2	14.2	12.8	10.8	10.9	10.0	2.9	996.9
82,5°	7.6	7.7	8.7	9.1	8.6	9.6	9.3	8.4	7.7	8.0	8.0	1.9	998.8
85,0°	3.8	3.9	4.2	4.1	3.7	3.8	3.5	3.3	3.2	3.6	3.9	0.9	999.7
87,5°	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.8	1.9	1.9	2.0	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Floodlight FL11	<b>Order number: 5XA779416F01BA</b> <b>EAN: 4058352851265</b>	<b>LP number</b> 59254_86
----------------------------------	--	------------------------------

**sitEco**

### Dimming levels table environmental temperature: 10°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	91200	663.7
95	238	252	86668	620.8
90	222	249	81989	577.9
85	207	247	77393	537.9
80	193	244	73030	501.2
75	179	241	68563	464.4
70	165	238	63982	428.0
65	151	235	59276	391.2
60	138	232	54838	357.8
55	125	228	50185	324.3
50	112	224	45442	290.8
45	100	220	40972	260.2
40	88	215	36483	229.1
35	76	210	31866	198.6
30	65	204	27502	171.1
25	53	197	22684	141.3
20	42	188	18186	113.9
15	31	177	13694	87.0
10	20	161	9002	60.0
5	10	136	4709	35.7
2	3	91	1669	17.6

### Dimming levels table environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	88410	658.7
95	237	251	83886	613.2
90	221	249	79507	570.6
85	206	246	75140	530.9
80	191	244	70707	491.9
75	177	241	66396	455.3
70	163	238	61981	418.8
65	149	234	57531	382.4
60	136	231	53155	349.4
55	123	227	48605	316.0
50	111	224	44340	285.5
45	98	219	39611	252.5
40	86	214	35193	221.6
35	75	209	31075	194.1
30	63	203	26350	164.3
25	52	196	22015	137.2
20	41	187	17594	110.2
15	30	176	13132	83.6
10	20	161	8917	59.3
5	9	132	4249	32.9
2	3	91	1656	17.3

**Photometric test report**

<b>Family</b> Floodlight FL11	<b>Order number: 5XA779416F01BA</b> <b>EAN: 4058352851265</b>	<b>LP number</b> 59254_86
----------------------------------	--	------------------------------

**Luminousfluxs table** **siteco**

Temperature °C	Luminous flux lm	Power consumption W
10.0	91200.0	663.7
25.0	88410.0	658.7