


Photometric test report

Family Silica® 21	Order number: 51MX31TCTDS EAN: 4058352795873	LP number 59310_102
	Version	Suspended luminaire, reflector, black, direct-/indirect distribution, narrow distribution, UGR≤16 (L65≤3000cd/m²), tunable white
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG-DALI
	Setting	factory setting
	Rated values	Net luminous flux = 15550 lm Power consumption = 140.6 W Luminous efficacy = 110.6 lm/W
		serial documentation 03.05.2023
		

Luminous intensity in cd/klm
C180-0
C270-90
Imax: 870 cd/klm

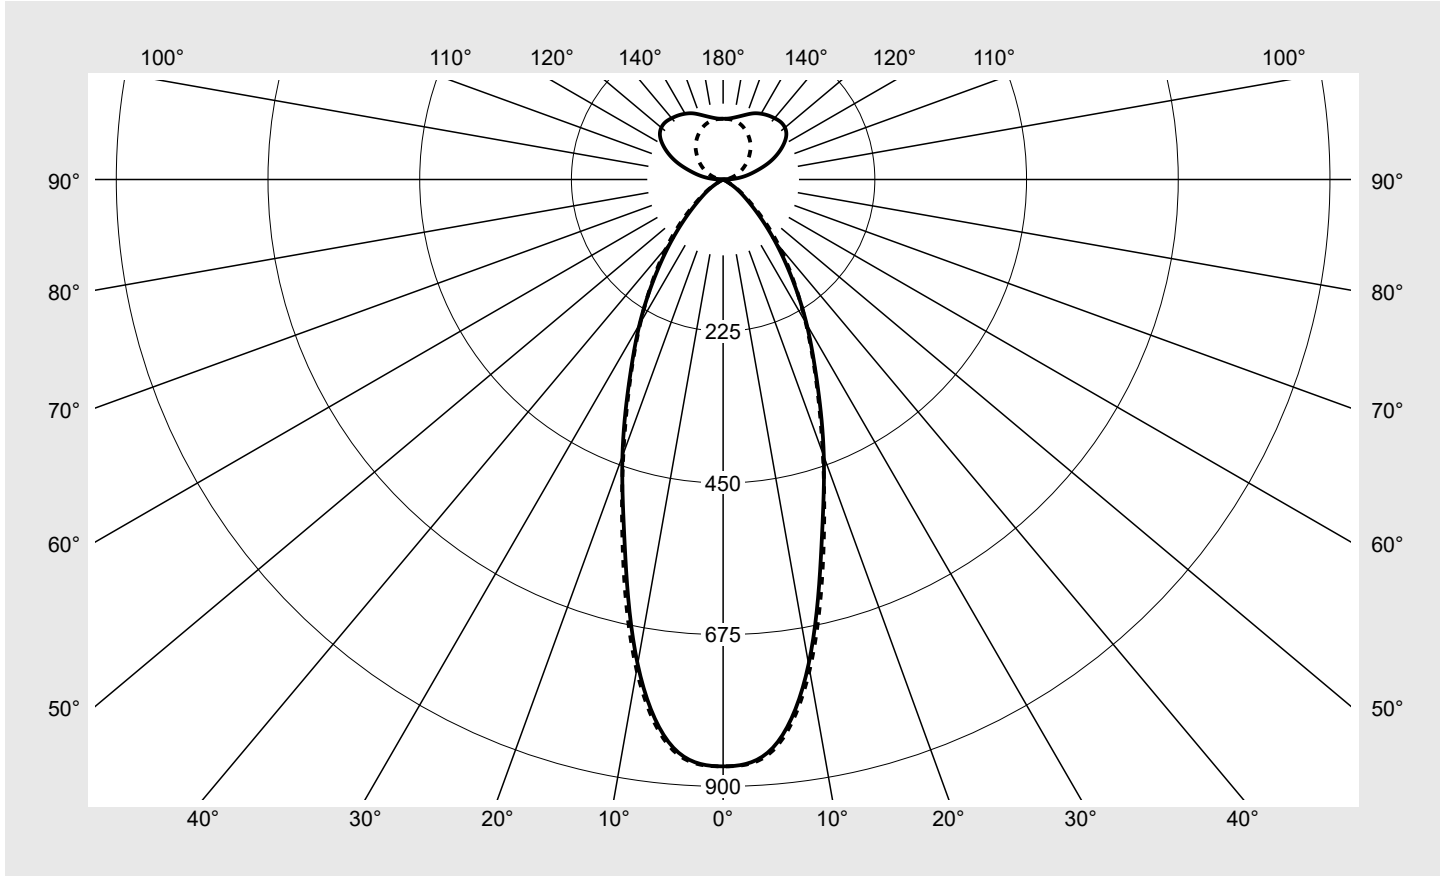

Classifications	
DIN 5040	C 7 2
CIE	N1=85 N2=99 N3=100 N4=60 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	59.6%
ϕ_o	40.4%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX31TCTDS EAN: 4058352795873	LP number 59310_102
Table of values for luminous intensities		Maximum luminous intensity



C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	870.3	870.3	870.3	870.3	870.3	870.3	870.3	5.2	5.2
5°	846.0	847.0	846.3	847.4	849.1	850.7	849.9	40.5	45.7
10°	729.9	730.5	735.4	740.2	741.6	737.5	738.7	70.1	115.8
15°	563.5	566.8	573.7	583.4	582.7	575.8	574.3	81.6	197.4
20°	436.6	435.3	429.7	429.7	431.1	427.8	432.4	80.9	278.3
25°	328.9	328.2	319.1	311.5	316.6	319.6	325.6	74.2	352.5
30°	247.8	246.0	233.3	230.7	239.5	241.8	245.2	65.7	418.2
35°	177.2	177.8	169.0	168.0	180.3	183.5	180.9	55.4	473.6
40°	120.1	121.7	120.2	121.8	131.6	132.5	129.5	44.2	517.8
45°	75.2	76.8	78.8	83.5	89.3	88.1	85.7	32.1	549.9
50°	44.3	46.1	49.1	53.4	57.3	54.4	51.5	21.6	571.5
55°	25.2	26.5	29.2	32.4	34.1	31.0	29.0	13.5	585.0
60°	8.3	10.2	15.9	18.3	18.2	12.9	10.8	6.7	591.7
65°	2.5	3.2	5.0	9.4	5.8	3.6	3.2	2.5	594.2
70°	1.1	1.1	1.0	1.8	1.2	1.4	1.5	0.7	594.9
75°	0.2	0.3	0.3	0.4	0.4	0.4	0.3	0.2	595.0
80°	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.0	595.1
85°	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.2	595.3
90°	5.7	5.5	5.8	5.6	3.2	1.1	0.4	2.2	597.5
95°	20.7	21.1	22.8	21.9	14.5	7.6	3.9	9.1	606.6
100°	36.3	37.4	38.2	34.3	23.7	13.6	9.0	15.3	621.9
105°	52.3	53.6	53.5	47.0	32.7	20.5	15.0	21.3	643.2
110°	71.5	72.2	68.8	58.2	41.9	27.5	21.3	27.0	670.2
115°	88.7	88.3	82.4	68.5	50.8	34.7	28.2	31.7	701.9
120°	103.3	102.0	94.0	77.2	59.3	41.7	35.0	35.1	737.0
125°	114.4	111.6	102.0	85.5	66.7	48.3	42.1	36.8	773.8
130°	119.7	117.2	106.2	90.6	72.3	55.0	49.2	36.8	810.6
135°	120.6	118.1	107.9	93.8	76.4	61.1	56.3	35.3	845.9
140°	118.7	116.7	108.1	95.8	79.5	66.7	63.6	32.8	878.7
145°	116.0	114.8	107.5	96.4	82.4	71.9	69.6	29.6	908.3
150°	112.6	112.0	105.4	95.3	84.5	76.9	75.0	25.9	934.3
155°	108.3	107.8	101.5	94.1	86.0	81.3	79.8	21.8	956.1
160°	102.5	102.2	97.5	92.7	87.4	84.6	84.2	17.4	973.5
165°	97.2	96.6	94.2	91.1	88.8	87.3	87.2	13.0	986.5
170°	93.2	92.7	92.0	90.7	89.7	89.4	89.3	8.7	995.2
175°	90.7	90.6	90.1	89.9	89.9	89.9	89.9	4.3	999.5
180°	90.1	90.1	90.1	90.1	90.1	90.1	90.1	0.5	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX31TCTDS EAN: 4058352795873	LP number 59310_102
-----------------------------	---	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	13.9	14.7	14.7	15.5	16.6	14.5	15.3	15.3	16.1	17.2
	3H	13.6	14.3	14.5	15.2	16.3	14.2	15.0	15.1	15.8	16.9
	4H	13.4	14.1	14.3	15.0	16.1	14.1	14.8	15.0	15.6	16.7
	6H	13.2	13.8	14.2	14.7	15.9	13.9	14.5	14.8	15.4	16.6
	8H	13.2	13.7	14.1	14.6	15.8	13.8	14.3	14.7	15.2	16.4
	12H	13.1	13.5	14.0	14.5	15.6	13.7	14.2	14.7	15.1	16.3
4H	2H	13.7	14.3	14.5	15.2	16.3	14.2	14.8	15.1	15.7	16.8
	3H	13.4	13.9	14.3	14.8	16.0	13.9	14.5	14.9	15.4	16.5
	4H	13.2	13.7	14.2	14.6	15.8	13.8	14.3	14.7	15.2	16.4
	6H	13.0	13.5	14.0	14.4	15.6	13.6	14.1	14.6	15.0	16.2
	8H	13.0	13.3	13.9	14.3	15.5	13.6	13.9	14.5	14.9	16.1
	12H	12.8	13.2	13.8	14.1	15.4	13.5	13.8	14.4	14.7	16.0
8H	4H	13.0	13.4	13.9	14.3	15.5	13.5	13.9	14.5	14.9	16.1
	6H	12.8	13.2	13.8	14.1	15.3	13.4	13.7	14.3	14.6	15.9
	8H	12.7	13.0	13.7	14.0	15.2	13.3	13.6	14.3	14.6	15.8
	12H	12.6	12.9	13.6	13.9	15.1	13.2	13.4	14.2	14.4	15.7
12H	4H	12.9	13.2	13.9	14.2	15.4	13.4	13.7	14.4	14.7	15.9
	6H	12.7	13.0	13.7	14.0	15.2	13.3	13.5	14.3	14.5	15.8
	8H	12.6	12.9	13.6	13.9	15.1	13.2	13.4	14.2	14.4	15.7

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 2940
			B = 49

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		11481.4	11728.8	12025.0	12747.8	13628.8	13454.0	13084.7	
50°		7443.7	7741.1	8252.8	8967.8	9613.8	9135.7	8645.4	
55°		4742.9	4994.6	5493.3	6092.3	6409.2	5839.9	5462.8	
60°		1795.1	2206.3	3437.5	3943.5	3930.1	2794.2	2337.1	
65°		638.8	808.1	1266.8	2394.5	1474.2	919.0	827.5	
70°		338.6	360.4	305.5	579.8	393.2	455.7	474.7	
75°		89.7	125.5	123.4	163.5	163.5	162.7	133.0	
80°		32.3	35.4	42.3	51.0	64.0	77.7	77.7	
85°		505.3	506.5	500.3	476.8	459.5	465.7	474.3	

Photometric test report

Family Silica® 21	Order number: 51MX31TCTDS EAN: 4058352795873	LP number 59310_102
------------------------------------	---	--------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

