




# Photometric test report

<b>Family</b> <b>Licross® 21 Performance</b>	<b>Order number: 52TD16CN445G</b> <b>EAN: 4058352903025</b>	<b>LP number</b> <b>58520_391</b>
	<b>Version</b> cover frosted, direct-/ indirect distribution, UGR≤19 (L65≤3000cd/m²) <b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG-Multilumen CLOi <b>Rated values</b> Net luminous flux = 4500 lm Power consumption = 24.1 W Luminous efficacy = 186.7 lm/W	<b>serial documentation</b> <b>20.02.2024</b>
		

**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 452 cd/klm**

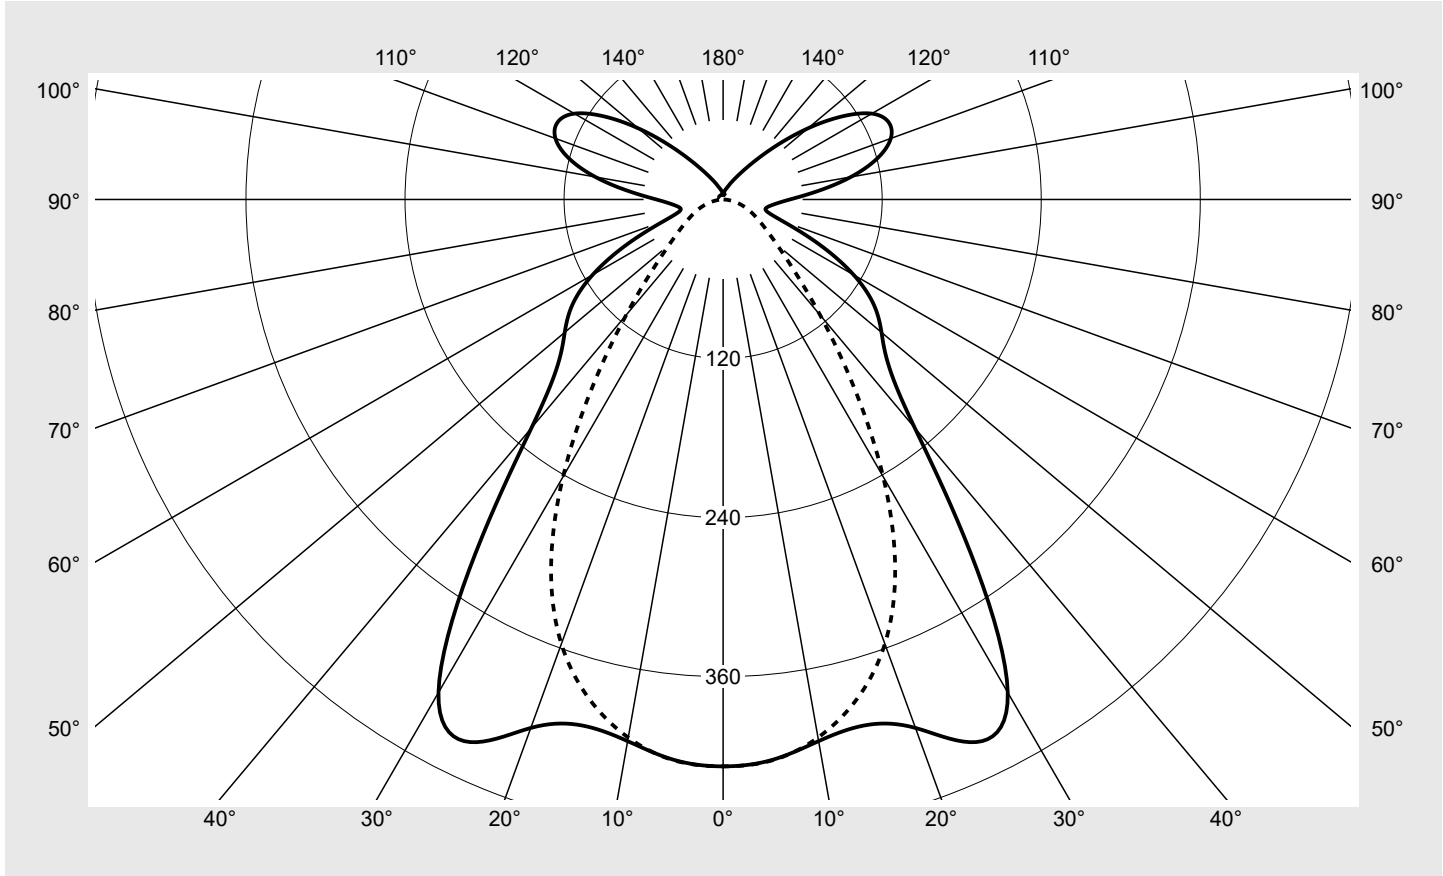

Classifications	
DIN 5040	B 5 1
CIE	N1=65 N2=88 N3=96 N4=79 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	79.3%
$\phi_o$	20.7%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

Family <b>Licross® 21 Performance</b>	Order number: <b>52TD16CN445G</b> EAN: <b>4058352903025</b>	LP number <b>58520_391</b>
Table of values for luminous intensities		Maximum luminous intensity
		<b>siteco</b>

C-planes $\gamma$	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	427.7	427.7	427.7	427.7	427.7	427.7	427.7	2.6	2.6
5°	424.4	422.4	420.2	422.1	424.3	424.4	424.8	20.2	22.8
10°	414.9	412.5	408.9	409.5	411.2	411.6	412.2	39.1	61.9
15°	410.8	406.7	398.1	393.2	390.9	389.7	390.1	56.3	118.2
20°	424.3	415.5	394.5	375.8	364.0	357.7	356.8	71.8	190.0
25°	451.7	439.9	403.9	360.3	329.2	311.6	307.2	85.9	275.8
30°	429.5	430.9	412.5	347.4	284.5	251.0	241.5	94.2	370.0
35°	325.6	344.5	379.3	329.0	231.5	183.8	171.0	89.9	460.0
40°	224.9	238.5	293.1	289.7	177.2	125.7	113.8	76.0	535.9
45°	176.4	174.8	199.5	224.7	128.0	84.3	75.7	60.6	596.5
50°	156.0	144.3	136.6	154.2	90.2	58.9	53.2	48.2	644.7
55°	139.0	122.9	98.4	99.7	63.9	43.4	39.8	38.7	683.4
60°	113.7	99.1	72.2	64.7	46.3	33.0	30.8	30.7	714.1
65°	79.7	70.2	51.6	43.8	34.5	25.6	24.0	23.0	737.1
70°	47.7	43.4	35.6	31.1	26.2	19.7	18.2	16.2	753.3
75°	33.9	31.2	26.1	23.2	19.9	14.4	12.7	12.2	765.5
80°	33.7	30.7	23.7	18.2	15.1	9.9	7.5	10.6	776.1
85°	39.3	35.6	26.3	17.2	11.4	6.2	3.2	10.7	786.9
90°	50.4	45.6	32.3	18.9	10.0	3.9	0.6	12.4	799.3
95°	71.3	63.5	42.3	22.5	11.4	4.6	1.0	16.4	815.7
100°	97.9	84.6	52.5	26.5	12.9	5.3	1.6	20.8	836.6
105°	120.7	101.7	62.6	30.2	14.2	6.1	2.4	24.4	860.9
110°	134.6	112.6	69.4	33.2	15.3	6.7	2.9	26.3	887.2
115°	137.8	115.5	72.0	34.6	16.0	7.2	3.2	26.1	913.3
120°	129.6	108.9	68.7	33.6	15.7	7.4	3.5	23.8	937.1
125°	109.1	92.2	59.5	30.3	14.7	7.4	3.7	19.5	956.6
130°	83.4	71.0	47.4	25.5	13.2	7.2	3.7	14.5	971.2
135°	58.6	50.3	35.1	20.5	11.4	6.8	3.7	10.0	981.2
140°	39.2	34.3	25.3	16.3	9.8	6.3	3.7	6.7	987.9
145°	26.6	23.8	18.6	13.0	8.2	5.4	3.7	4.4	992.3
150°	18.7	17.2	14.2	10.0	6.9	5.0	3.7	2.9	995.2
155°	13.8	12.8	10.8	7.8	6.8	4.4	3.6	2.0	997.2
160°	10.2	9.8	7.9	6.8	5.6	4.6	3.5	1.3	998.5
165°	8.2	7.8	6.5	5.6	5.0	4.1	3.7	0.8	999.3
170°	6.4	5.6	4.7	4.7	5.0	4.1	3.9	0.5	999.8
175°	4.2	3.7	4.1	4.1	4.1	4.2	4.2	0.2	1000.0
180°	3.7	3.7	3.7	3.7	3.7	3.7	3.7	0.0	1000.0

## Photometric test report

<b>Family</b> Licross® 21 Performance	<b>Order number: 52TD16CN445G</b> <b>EAN: 4058352903025</b>	<b>LP number</b> 58520_391
------------------------------------------	----------------------------------------------------------------	-------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	16.3	17.6	16.9	18.1	18.8	12.5	13.8	13.1	14.3	15.0
	3H	16.9	18.0	17.5	18.6	19.3	12.9	14.0	13.5	14.6	15.3
	4H	17.1	18.1	17.7	18.7	19.4	13.1	14.2	13.7	14.8	15.5
	6H	17.3	18.2	18.0	18.9	19.6	13.3	14.2	13.9	14.8	15.6
	8H	17.6	18.4	18.3	19.0	19.8	13.2	14.1	13.9	14.8	15.5
	12H	17.9	18.6	18.6	19.3	20.1	13.3	14.1	13.9	14.8	15.5
4H	2H	16.3	17.4	16.9	18.0	18.7	13.0	14.0	13.6	14.6	15.3
	3H	17.0	17.8	17.6	18.5	19.3	13.5	14.4	14.2	15.0	15.8
	4H	17.2	18.0	17.9	18.7	19.5	13.8	14.6	14.5	15.3	16.1
	6H	17.7	18.3	18.4	19.0	19.9	14.0	14.7	14.7	15.4	16.2
	8H	18.0	18.6	18.7	19.3	20.2	14.1	14.7	14.8	15.4	16.3
	12H	18.5	19.0	19.3	19.8	20.7	14.1	14.7	14.9	15.4	16.3
8H	4H	17.2	17.8	17.9	18.5	19.4	14.0	14.6	14.7	15.3	16.1
	6H	17.8	18.3	18.5	19.0	19.9	14.4	14.8	15.1	15.6	16.5
	8H	18.3	18.7	19.0	19.5	20.3	14.5	15.0	15.3	15.7	16.6
	12H	19.0	19.4	19.8	20.2	21.1	14.6	15.0	15.4	15.8	16.7
12H	4H	17.1	17.7	17.9	18.4	19.3	14.0	14.5	14.8	15.2	16.1
	6H	17.7	18.2	18.5	18.9	19.8	14.5	14.9	15.2	15.6	16.6
	8H	18.3	18.7	19.1	19.4	20.4	14.7	15.1	15.5	15.8	16.8

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 1480</b>	<b>H(C0) = 36</b>	<b>H(C180) = 36</b>
			<b>B = 115</b>	<b>H(C90) = 0</b>	<b>H(C270) = 0</b>

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
	45°	5023.8	5018.4	5868.8	6879.2	4139.9	2916.3	2828.9	
	50°	4673.3	4361.9	4245.2	5019.1	3127.8	2210.6	2187.0	
	55°	4427.7	3957.5	3270.4	3492.8	2407.2	1793.0	1833.6	
	60°	3898.2	3440.1	2596.9	2473.4	1928.0	1532.5	1628.5	
	65°	2985.1	2662.3	2040.1	1858.2	1618.1	1365.9	1503.6	
	70°	1981.6	1832.2	1577.3	1497.1	1413.8	1244.8	1409.5	
	75°	1599.3	1496.2	1325.8	1297.9	1285.1	1132.2	1298.5	
	80°	1850.5	1723.3	1422.0	1227.1	1220.0	1034.8	1143.0	
	85°	2602.2	2426.8	1945.7	1478.4	1236.9	978.2	973.2	


**Photometric test report**

<b>Family</b> <b>Licross® 21 Performance</b>	<b>Order number: 52TD16CN445G</b> <b>EAN: 4058352903025</b>	<b>LP number</b> <b>58520_391</b>
-------------------------------------------------	----------------------------------------------------------------	--------------------------------------

**Luminance values in cd/m<sup>2</sup>**

$\gamma$ 65°	$\gamma$ 70°	$\gamma$ 75°	$\gamma$ 80°	$\gamma$ 85°
--------------	--------------	--------------	--------------	--------------

**sitEco**

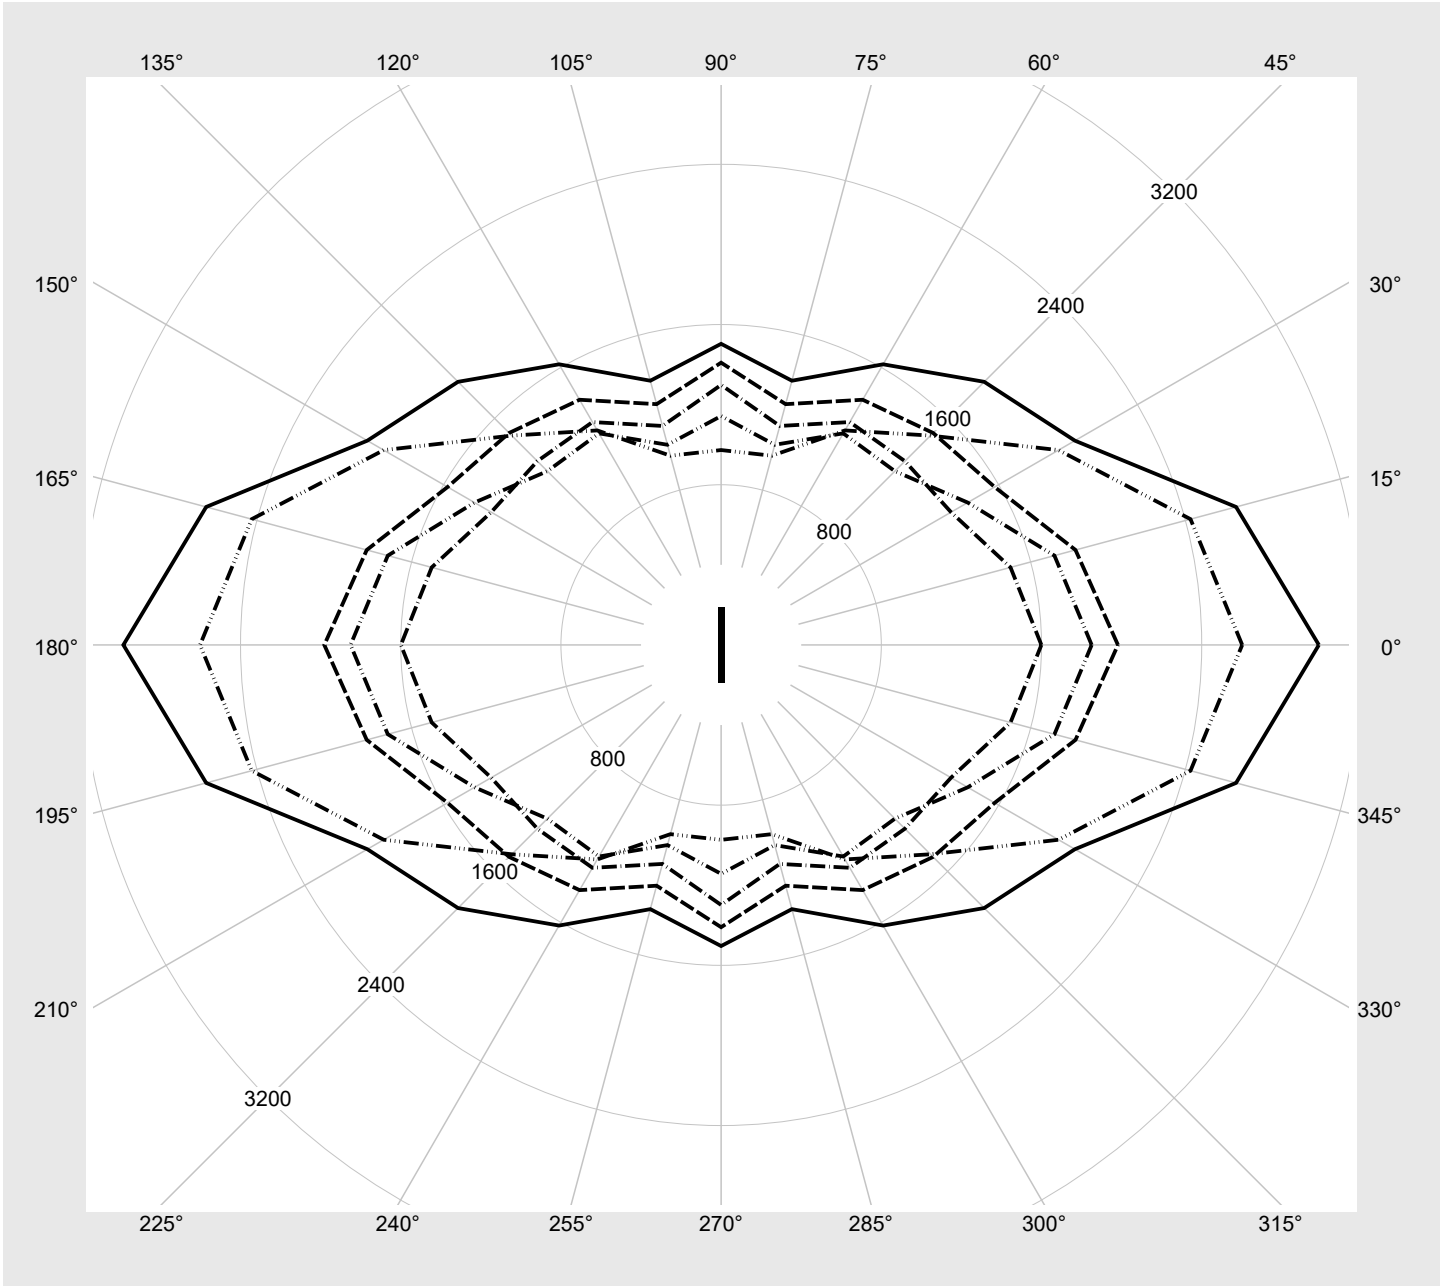

**Photometric test report**

<b>Family</b> Licross® 21 Performance	<b>Order number: 52TD16CN445G</b> <b>EAN: 4058352903025</b>	<b>LP number</b> <b>58520_391</b>
------------------------------------------	----------------------------------------------------------------	--------------------------------------

<b>Multilumen Table</b>	environmental temperature: 25°C	<b>sITeco</b>
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]	Power consumption	Power consumption
	1	2	3			end of lifetime [W]	average [W]
1	A	C	E	4500	24.1	28.2	26.2
2	A	C	F	4416	23.7	27.9	25.8
3	A	D	E	4343	23.2	27.4	25.3
4	A	D	F	4259	22.8	27.0	24.9
5	B	C	E	4185	22.3	26.2	24.2
6	B	C	F	4101	22.0	25.7	23.8