

Order No.: 5XH2E7AA08JA | GTIN (EAN): 4069025102546


Product description: SL31mn,STW1.0a,10010lm722,Easy



Streetlight SL 31 mini Easy mast luminaire for post-top, side-entry; light control with lens of PMMA; light distribution: STW1.0a, direct asymmetric distribution, for standard-compliant lighting for roads and squares; LED: luminous flux: 10.010lm, light colour: 722, colour temperature: 2200K; luminous efficacy: 123,4lm/W; control: overheat protection, intelligent temperature release in ECG and LED module, constant luminous flux control, time-dependent luminous flux control, flexible luminous flux parameterisation, pre-setting: linear dimming characteristic; luminaire housing, of diecast aluminium, Siteco® metallic grey (DB 702S), corrosivity category C5 high according to DIN EN ISO 12944; cover of toughened safety glass, transparent, mast flange of diecast aluminium, Siteco® metallic grey (DB 702S), spigot size: 76/60mm, mast flange included unmounted; with cable H07RN-F 2x 1.5mm<sup>2</sup>, cable length: 10,5m, connection cable pre-assembled; mains connection: 220..240V, AC, 50/60Hz; power consumption (at start of service life): 81,1W / (at end of service life): 88,3W / (with reduced operation 50%): 36,1W; protection rating (complete): IP66; insulation class (complete): insulation class II (safety insulation); impact resistance: IK09; certification: CE, ENEC, ENEC+, VDE, UKCA; permissible operating ambient temperature for outdoor applications: -40..+50°C; packaging unit: 1 piece



Lamps: LED  
 Wt. (kg): 6.7  
 GTIN (EAN): 4069025102546

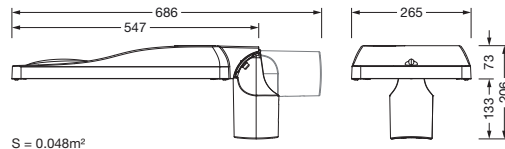

Order No.: 5XH2E7AA08JA | GTIN (EAN): 4069025102546

Detailed technical description: SL31mn,STW1.0a,10010lm722,Easy



### Key data

- Product type: mast luminaire
- Product name: Streetlight SL 31 mini
- Order No.: 5XH2E7AA08JA

### Lighting technology | Lamps | Control gear

#### Component 1

#### Lighting technology:

- Light control: lens of PMMA
- Cover: cover, transparent
- Light distribution: STW1.0a
- Beam angle: wide distribution
- Symmetry: asymmetric distribution
- Light emission: direct distribution

#### Lamps:

- Lamps: with High Power LED, LED
- Rated luminous flux: 10010lm
- Luminous efficacy: 123lm/W
- Colour temperature: 2200K
- Colour rendering index: CRI > 70
- Light colour: 722
- Rated input power begin service life: 81
- Rated input power end service life: 88
- Rated input power at 50% lumin. flux: 36

#### Operating device:

- Control: Easy
- Equipment: overheat protection, constant luminous flux control, time-dependent luminous flux control, flexible luminous flux parameterisation, intelligent temperature release in ECG and LED module, pre-setting: linear dimming characteristic

#### Certificates, Standards

- Protection rating: IP66
- Insulation class: insulation class II (safety insulation)
- Impact resistance: IK09
- Temperature range (operation): -40..+50°C
- Supplement: standard-compliant lighting for roads and squares
- Corrosion protection: corrosivity category C5 high according to DIN EN ISO 12944
- Certification, designation: CE, ENEC, ENEC+, VDE, UKCA

### Material, Colour

- luminaire housing: diecast aluminium, powder-coated, Siteco® metallic grey (DB 702S), sealing non-destructively replaceable, multi-level sealing system, inclination: -15°..+20° (post-top) | -20°..+20° (side-entry), adjustable in 5° steps, no sealing on luminaire upper side
- Colour specification: Siteco® metallic grey (DB 702S)
- mast flange: diecast aluminium, coated, Siteco® metallic grey (DB 702S), mast flange included unmounted
- Colour specification: Siteco® metallic grey (DB 702S)
- Cover: cover of toughened safety glass

### Mounting

- Mounting method, mounting location: side-entry, post-top, on mast

### Electrical connection

- Connection: cable H07RN-F 2x 1.5mm<sup>2</sup>
- Nominal voltage: 220..240V, 50/60Hz, AC
- Surge voltage resistance: 10kV 1.2/50µs
- Connection cable: pre-assembled, L= 10.5m

### Dimensions, Weight

- Weight: 6.7kg
- Mast spigot: spigot size: 76/60mm

### Light emission


- Light emission: 0% at 0° inclination

### Service life

- Rated service life: 100000h at AT = 25°C

Order No.: 5XH2E7AA08JA | GTIN (EAN): 4069025102546

Dimensions: SL31mn,STW1.0a,10010Im722,Easy

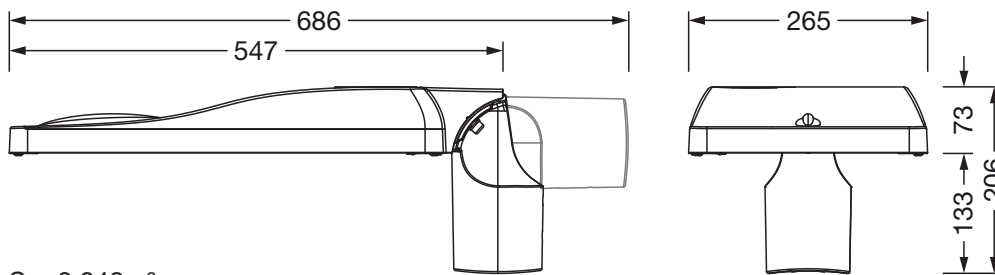

S = 0.048m<sup>2</sup>