

Photometric test report

Family
Monsun® Ex

Order number: **51FXB1DP4A0A**
EAN: **4058352933404**

LP number
59500_1



Version prismatic diffuser, opal, polycarbonate, elliptical medium distributon

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI

Rated values Net luminous flux = 11930 lm
Power consumption = 94.7 W
Luminous efficacy = 126 lm/W

serial
documentation
06.11.2023


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: **649 cd/klm**

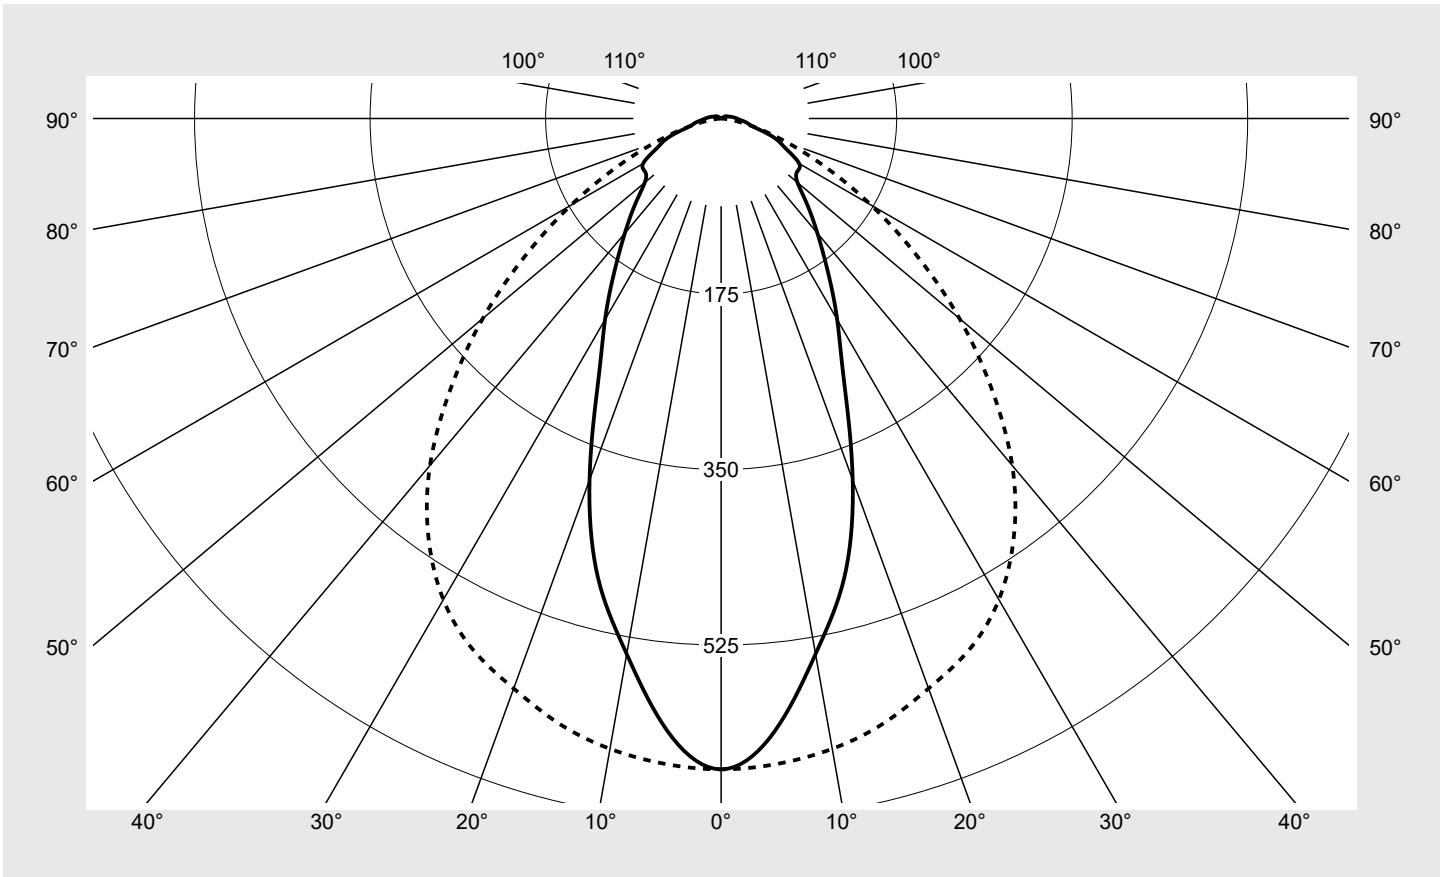

Classifications

DIN 5040 A 5 1
CIE N1=61 N2=86 N3=97
N4=98 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 98.3%
 ϕ_o 1.7%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® Ex	Order number: 51FXB1DP4A0A EAN: 4058352933404	LP number 59500_1
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	648.9	648.9	648.9	648.9	648.9	648.9	648.9	3.9	3.9
5°	613.2	614.6	619.7	628.1	636.7	643.2	645.9	30.0	33.9
10°	542.2	547.0	559.3	579.7	603.7	626.8	638.1	55.6	89.5
15°	474.2	479.5	494.7	520.1	559.4	601.8	624.5	75.8	165.3
20°	383.6	394.2	422.7	461.8	507.0	568.3	604.8	89.0	254.3
25°	290.3	301.3	333.6	392.4	452.0	525.9	584.7	94.3	348.6
30°	231.4	238.1	258.4	313.2	392.6	474.9	553.9	94.5	443.2
35°	185.1	190.9	209.8	244.2	327.3	418.4	508.9	91.0	534.2
40°	149.4	153.3	167.8	197.2	262.5	358.4	451.6	84.5	618.8
45°	121.4	125.7	136.6	159.1	205.5	298.1	381.7	76.0	694.8
50°	99.4	102.9	112.6	127.3	162.4	239.6	310.3	66.5	761.2
55°	92.5	90.5	93.6	105.4	127.7	185.3	238.1	57.5	818.7
60°	89.8	87.6	84.0	89.0	99.3	137.3	172.8	49.7	868.4
65°	71.3	71.5	68.0	74.2	78.9	97.8	115.4	40.1	908.5
70°	56.8	56.8	54.2	55.0	59.8	66.0	70.6	30.5	939.0
75°	35.1	36.1	37.2	40.2	39.9	39.4	37.9	20.2	959.2
80°	26.8	27.5	28.0	26.5	24.0	19.4	15.9	13.2	972.4
85°	20.0	20.2	19.4	18.1	12.9	7.0	3.5	8.1	980.6
90°	15.8	15.3	14.4	12.2	6.5	2.4	1.0	5.4	986.0
95°	12.6	12.1	10.4	8.1	3.9	1.7	1.1	3.9	989.9
100°	9.8	9.4	7.3	5.6	3.5	1.7	0.9	2.9	992.8
105°	7.5	6.9	6.5	4.6	3.2	1.2	0.9	2.3	995.2
110°	6.4	6.2	5.5	4.0	2.8	1.0	0.8	2.0	997.2
115°	5.3	5.1	4.3	3.3	1.8	0.6	0.6	1.5	998.6
120°	3.9	3.7	2.2	1.6	1.0	0.4	0.5	0.9	999.5
125°	0.4	0.7	0.9	0.8	0.5	0.3	0.4	0.3	999.8
130°	0.0	0.1	0.3	0.4	0.2	0.2	0.3	0.1	999.9
135°	0.0	0.0	0.1	0.2	0.1	0.2	0.2	0.0	999.9
140°	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Monsun® Ex	Order number: 51FXB1DP4A0A EAN: 4058352933404	LP number 59500_1
-----------------------------	--	-----------------------------

UGR-Table	Standard room	siteco	
-----------	---------------	---------------	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	16.8	18.4	17.2	18.7	19.0	21.7	23.2	22.0	23.5	23.8
	3H	18.2	19.6	18.6	20.0	20.3	22.6	24.0	23.0	24.3	24.7
	4H	18.7	20.0	19.1	20.3	20.7	22.9	24.1	23.3	24.5	24.8
	6H	19.0	20.2	19.4	20.6	21.0	23.0	24.1	23.4	24.5	24.9
	8H	19.2	20.3	19.6	20.7	21.1	23.0	24.1	23.5	24.4	24.9
	12H	19.3	20.4	19.8	20.8	21.2	23.0	24.0	23.5	24.4	24.8
4H	2H	17.7	19.0	18.1	19.3	19.7	21.7	23.0	22.1	23.4	23.8
	3H	19.2	20.3	19.6	20.7	21.1	22.8	23.9	23.2	24.3	24.7
	4H	19.7	20.7	20.1	21.1	21.5	23.1	24.1	23.6	24.5	25.0
	6H	20.1	21.0	20.6	21.4	21.9	23.3	24.1	23.8	24.6	25.0
	8H	20.3	21.1	20.8	21.6	22.0	23.4	24.1	23.8	24.5	25.0
	12H	20.5	21.2	21.0	21.7	22.2	23.4	24.0	23.9	24.5	25.0
8H	4H	20.0	20.8	20.5	21.2	21.7	23.2	24.0	23.6	24.4	24.9
	6H	20.6	21.2	21.1	21.7	22.2	23.4	24.1	23.9	24.5	25.0
	8H	20.9	21.4	21.4	21.9	22.5	23.5	24.0	24.0	24.5	25.0
	12H	21.2	21.7	21.7	22.2	22.7	23.5	24.0	24.0	24.5	25.0
12H	4H	20.1	20.7	20.6	21.2	21.7	23.2	23.9	23.7	24.3	24.8
	6H	20.7	21.2	21.2	21.7	22.2	23.4	24.0	23.9	24.5	25.0
	8H	21.0	21.5	21.5	22.0	22.5	23.5	24.0	24.0	24.5	25.0

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:		L = 1580	H(C0) = 50	H(C180) = 50
				B = 155	H(C90) = 50	H(C270) = 50

C-planes	γ	Luminance in cd/m ²						
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
45°		6325.9	6564.0	7263.2	8764.6	11910.6	18435.9	25487.3
50°		5442.5	5645.4	6313.6	7430.4	10045.9	15982.6	22659.1
55°		5378.7	5276.7	5589.3	6591.4	8542.0	13536.4	19346.3
60°		5614.7	5492.9	5413.9	6046.2	7293.2	11168.2	15957.9
65°		4855.5	4888.4	4803.0	5565.9	6472.7	9059.4	12459.2
70°		4290.8	4304.6	4265.4	4639.7	5608.8	7159.9	9245.5
75°		2998.8	3099.4	3333.8	3912.2	4407.4	5205.4	6383.9
80°		2657.5	2739.0	2935.3	3076.5	3248.8	3304.7	3787.2
85°		2387.1	2421.5	2482.9	2618.2	2290.0	1689.9	1419.4

Photometric test report

Family Monsun® Ex	Order number: 51FXB1DP4A0A EAN: 4058352933404	LP number 59500_1
------------------------------------	--	------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

