
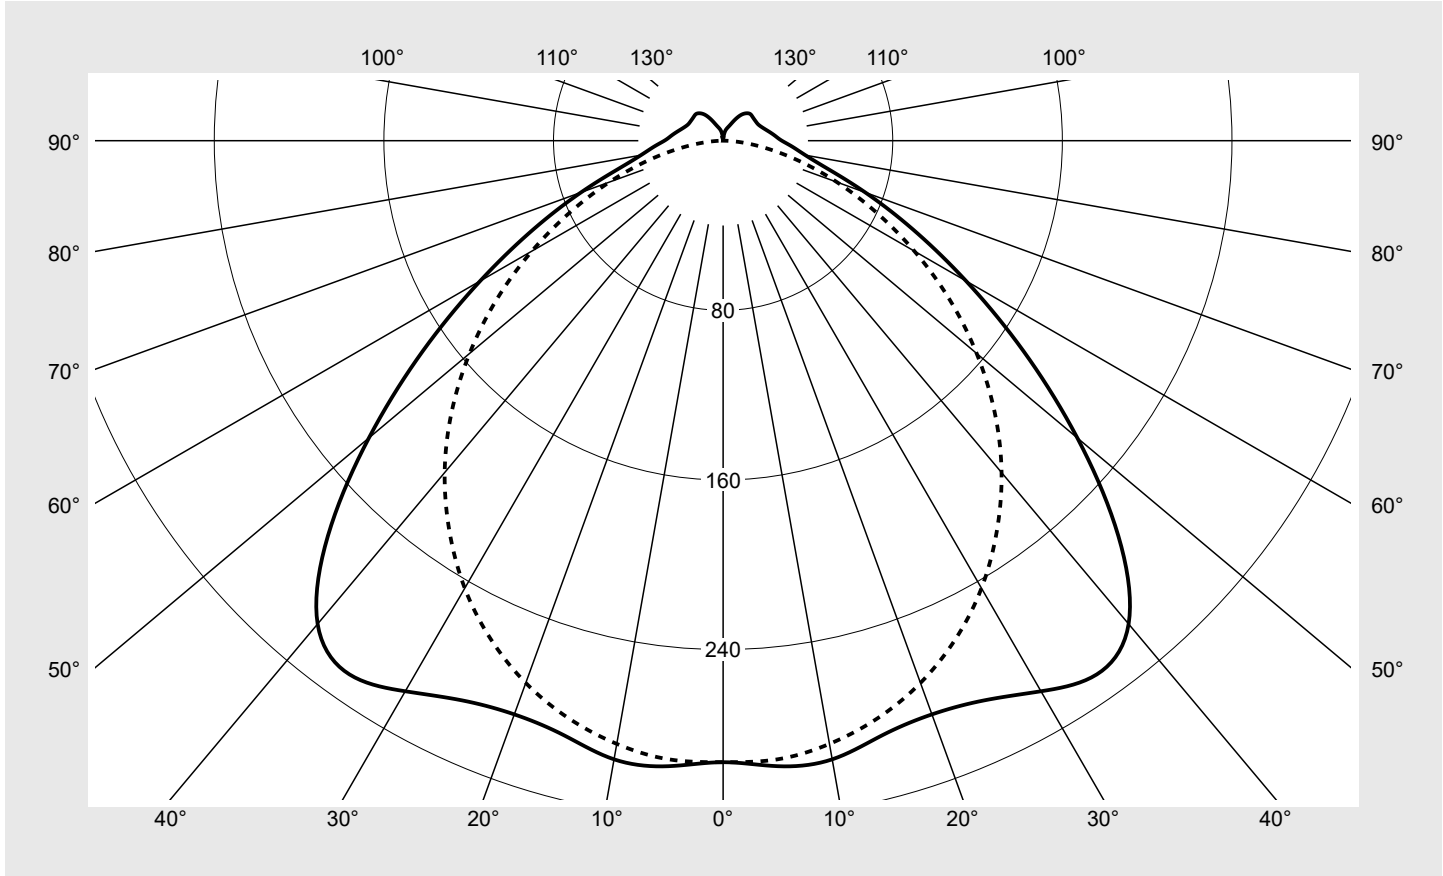


Photometric test report

Family Modario® 31 	Order number: 53BM8127V68XC2 EAN: 4069025121707	LP number 59594_39
	Version diffuser optic, frosted, wide distribution Lamps LED 6500 K CRI ≥ 80 Controlgear ECG Rated values Net luminous flux = 8340 lm Power consumption = 47.9 W Luminous efficacy = 174.1 lm/W	serial documentation 06.05.2024

Luminous intensity in cd/klm **C180-0** **C270-90** **Imax: 307 cd/klm**



Classifications	
DIN 5040	A 4 1
CIE	N1=47 N2=80 N3=95 N4=93 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	92.6%
ϕ_o	7.4%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Modario® 31	Order number: 53BM8127V68XC2 EAN: 4069025121707	LP number 59594_39
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
0°	293.1	293.1	293.1	293.1	293.1	293.1	293.1	1.8	1.8
5°	296.1	295.6	293.1	293.6	293.8	293.0	292.9	14.0	15.8
10°	296.3	296.3	293.6	293.6	292.6	289.9	288.9	27.9	43.7
15°	290.3	290.9	288.4	289.1	288.3	284.2	281.9	40.8	84.5
20°	287.9	288.2	282.8	281.1	280.6	275.9	272.2	52.8	137.3
25°	291.3	290.8	281.6	274.0	270.0	264.7	259.4	64.0	201.2
30°	299.8	298.4	283.7	269.7	258.3	250.5	243.7	74.6	275.8
35°	307.3	306.0	288.6	266.7	246.6	233.7	225.0	84.2	360.1
40°	297.5	299.0	287.4	263.1	235.0	215.2	204.3	91.1	451.1
45°	263.6	268.2	268.7	253.4	221.8	194.2	181.1	92.3	543.4
50°	218.1	223.5	232.0	231.1	204.9	171.7	156.1	87.5	630.9
55°	172.9	177.3	186.9	195.4	181.1	147.5	130.2	77.8	708.7
60°	132.3	135.3	142.3	152.9	149.4	121.4	104.1	64.8	773.5
65°	98.5	100.2	104.0	112.2	114.5	94.5	79.4	50.9	824.4
70°	71.4	72.6	74.4	79.3	82.2	69.0	57.1	37.9	862.3
75°	51.0	51.6	52.9	55.5	55.9	46.4	37.5	27.0	889.4
80°	39.4	39.1	38.7	38.1	35.5	27.5	20.9	18.8	908.2
85°	32.8	32.1	30.1	26.5	21.0	13.7	8.3	13.1	921.3
90°	27.7	27.1	24.5	19.3	12.6	5.6	0.8	9.4	930.7
95°	24.8	24.4	22.4	17.8	11.6	5.3	0.8	8.6	939.3
100°	22.5	22.2	20.5	16.7	11.5	5.5	0.8	7.9	947.2
105°	20.6	20.3	18.7	16.0	11.5	5.9	0.8	7.3	954.6
110°	19.2	18.7	17.6	15.5	11.7	6.3	0.7	6.8	961.4
115°	18.2	17.8	17.0	15.3	12.2	5.8	0.8	6.4	967.8
120°	17.9	17.4	16.9	15.5	12.3	5.3	0.8	6.1	973.9
125°	17.8	17.4	16.9	15.5	11.8	5.2	0.8	5.7	979.6
130°	17.9	17.4	16.8	15.0	10.1	5.0	0.9	5.2	984.7
135°	17.9	17.3	16.2	13.6	8.1	4.3	1.0	4.5	989.2
140°	16.9	16.0	14.5	11.2	6.7	3.5	1.1	3.6	992.8
145°	14.9	14.0	12.0	8.5	5.5	2.8	1.2	2.7	995.4
150°	11.8	10.8	9.0	6.5	4.7	2.2	1.4	1.8	997.3
155°	8.6	8.1	7.0	5.2	4.0	1.7	1.5	1.2	998.5
160°	6.8	6.5	5.3	4.3	3.2	1.5	1.5	0.8	999.2
165°	5.5	5.3	3.9	3.4	2.1	1.6	1.6	0.5	999.7
170°	3.8	3.1	2.5	2.0	1.6	1.6	1.6	0.2	999.9
175°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.1	1000.0
180°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.0	1000.0

Photometric test report

Family Modario® 31	Order number: 53BM8127V68XC2 EAN: 4069025121707	LP number 59594_39
------------------------------	--	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	22.3	24.0	22.6	24.3	24.6	22.1	23.7	22.4	24.1	24.4
	3H	23.1	24.6	23.5	25.0	25.3	23.2	24.7	23.5	25.0	25.4
	4H	23.4	24.9	23.8	25.2	25.6	23.6	25.0	24.0	25.4	25.7
	6H	23.7	25.0	24.1	25.4	25.8	23.8	25.2	24.2	25.5	25.9
	8H	23.9	25.1	24.3	25.5	25.9	23.9	25.2	24.3	25.6	26.0
	12H	24.1	25.2	24.5	25.6	26.0	24.0	25.2	24.4	25.5	26.0
4H	2H	22.9	24.4	23.3	24.7	25.1	22.8	24.2	23.2	24.6	24.9
	3H	23.9	25.1	24.3	25.5	25.9	24.1	25.3	24.5	25.7	26.1
	4H	24.3	25.4	24.8	25.8	26.3	24.6	25.7	25.1	26.1	26.6
	6H	24.7	25.7	25.2	26.1	26.6	25.0	26.0	25.4	26.4	26.8
	8H	24.9	25.8	25.4	26.2	26.7	25.1	26.0	25.6	26.4	26.9
	12H	25.2	25.9	25.6	26.4	26.9	25.2	26.0	25.7	26.4	26.9
8H	4H	24.6	25.5	25.0	25.9	26.4	24.9	25.8	25.3	26.2	26.7
	6H	25.1	25.8	25.6	26.3	26.8	25.4	26.1	25.8	26.6	27.1
	8H	25.4	26.0	25.9	26.5	27.0	25.5	26.2	26.0	26.7	27.2
	12H	25.7	26.3	26.2	26.8	27.3	25.7	26.2	26.2	26.7	27.3
12H	4H	24.6	25.4	25.1	25.9	26.4	24.9	25.7	25.4	26.2	26.6
	6H	25.2	25.8	25.7	26.3	26.8	25.4	26.1	25.9	26.6	27.1
	8H	25.5	26.1	26.0	26.6	27.1	25.6	26.2	26.2	26.7	27.2

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1476	H(C0) = 25	H(C180) = 25
			B = 75	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		21066.0	21618.8	22216.2	21847.7	20258.9	19049.3	19297.7	
50°		18293.9	18929.2	20231.7	21143.1	20031.1	18251.1	18296.4	
55°		15383.7	15948.8	17381.3	19205.4	19208.8	17252.3	17107.3	
60°		12638.4	13083.6	14290.3	16359.2	17466.3	15909.6	15692.6	
65°		10242.2	10570.1	11454.2	13289.4	15043.3	14208.5	14148.0	
70°		8203.8	8482.2	9133.6	10604.4	12422.9	12288.5	12569.6	
75°		6612.1	6822.9	7408.4	8593.9	10030.4	10207.6	10909.9	
80°		5914.2	6005.8	6358.8	7080.7	7925.9	8018.3	9065.5	
85°		5893.6	5936.0	6056.5	6199.6	6259.5	5954.0	7208.4	

Photometric test report

Family Modario® 31	Order number: 53BM8127V68XC2 EAN: 4069025121707	LP number 59594_39
-------------------------------------	--	-------------------------------------

Luminance values in cd/m²

γ 65°
γ 70°
γ 75°
γ 80°
γ 85°

