

Order No.: 51TE12DV4FXG3S4 | **GTIN (EAN):** 4058352934906


Product description: Lic11Re,wd,15360lm840,DA2,IP54,L2250,wh



Licross® 11 Recessed MO, luminaire insert, of sheet steel, galvanised, coil coated, white, length: 2.250mm, width: 66mm, height: 67mm, LED rated luminous flux: 15.360lm, light colour: 840, control gear: DALI 2, with plug, 6-pole, with phase selection, for trunking rail, 9 or 11-core, mains connection: 220..240V, AC, 50/60Hz, rated input power: 88W, for trunking rail, 9-/11-core, halogen-free wiring, for emergency light function, converter, control gear: single battery element, battery: LiFePO4, 9Ah, primary optical cover: cover, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, protection rating (complete): IP54, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, protection symbol: D if used in an environment with non-conductive dust loads with corresponding accessories, impact resistance: IK06, permissible ambient temperature for indoor applications: +5..+35°C, standard: EN 60598-2-22, LABS conformity tested according to VDMA 24364:2018-05, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, packaging unit: 1 piece

IP 54 IK 06  

Lamps:	LED
Wt. (kg):	2.5
GTIN (EAN):	4058352934906

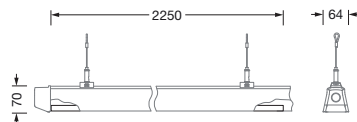

Order No.: 51TE12DV4FXG3S4 | **GTIN (EAN):** 4058352934906

Detailed technical description: Lic11Re,wd,15360lm840,DA2,IP54,L2250,wh



Key data

- Product type: luminaire insert
- Product name: Licross® 11 Recessed MO
- Order No.: 51TE12DV4FXG3S4

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: cover
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 25
- UGR viewing direction along lateral luminaire axis: ≤ 25

Lamps:

- Supplement: with self-test function according to 60598-2-22, 2-rod battery, charging phase on L¹ (wire number 4)

Operating device:

- Control gear: single battery element
- Battery: LiFePO₄
- Nominal operating time: 3h

Component 2

Certificates, Standards

- Protection rating: IP54
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK06
- Protection symbol: D if used in an environment with non-conductive dust loads with corresponding accessories
- Temperature range (operation): +5..+35°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, LABS conformity tested according to VDMA 24364:2018-05
- Standard: EN 60598-2-22
- Certification, designation: CE, UKCA

Material, Colour

- Licross® LED insert: sheet steel, galvanised, coil coated, white
- Colour specification: white
- Cover: cover of PMMA

Mounting

- Mounting method, mounting location: slip-in mounting, in the Licross® trunking rail
- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

Electrical connection

- Connection: plug, 6-pole, with phase selection, for trunking rail, 9 or 11-core
- Nominal voltage: 220..240V, 50/60Hz, AC

Dimensions, Weight

- Length: 2250mm
- Width: 66mm
- Height: 67mm
- Weight: 2.5kg

Service life

- Rated service life: 100000h (L95/B50) at AT = 25°C, 100000h (L90/B50) at AT = ta max

Order No.: 51TE12DV4FXG3S4 | GTIN (EAN): 4058352934906

Dimensions: Lic11Re,wd,15360lm840,DA2,IP54,L2250,wh

