

Photometric test report

Family
Silica® 21

Order number: 51MX31DC4DBB
EAN: 4058352893364

LP number
59281_69



Version Suspended luminaire, reflector, black, direct-/indirect distribution, narrow distribution, UGR≤16 (L65≤3000cd/m²)

Lamps LED 4000 K | CRI ≥ 80


Controlgear ECG-DALI

Rated values Net luminous flux = 18230 lm
Power consumption = 105.9 W
Luminous efficacy = 172.1 lm/W

serial documentation
02.08.2023



Luminous intensity in cd/klm C180-0 C270-90 **Imax: 959 cd/klm**

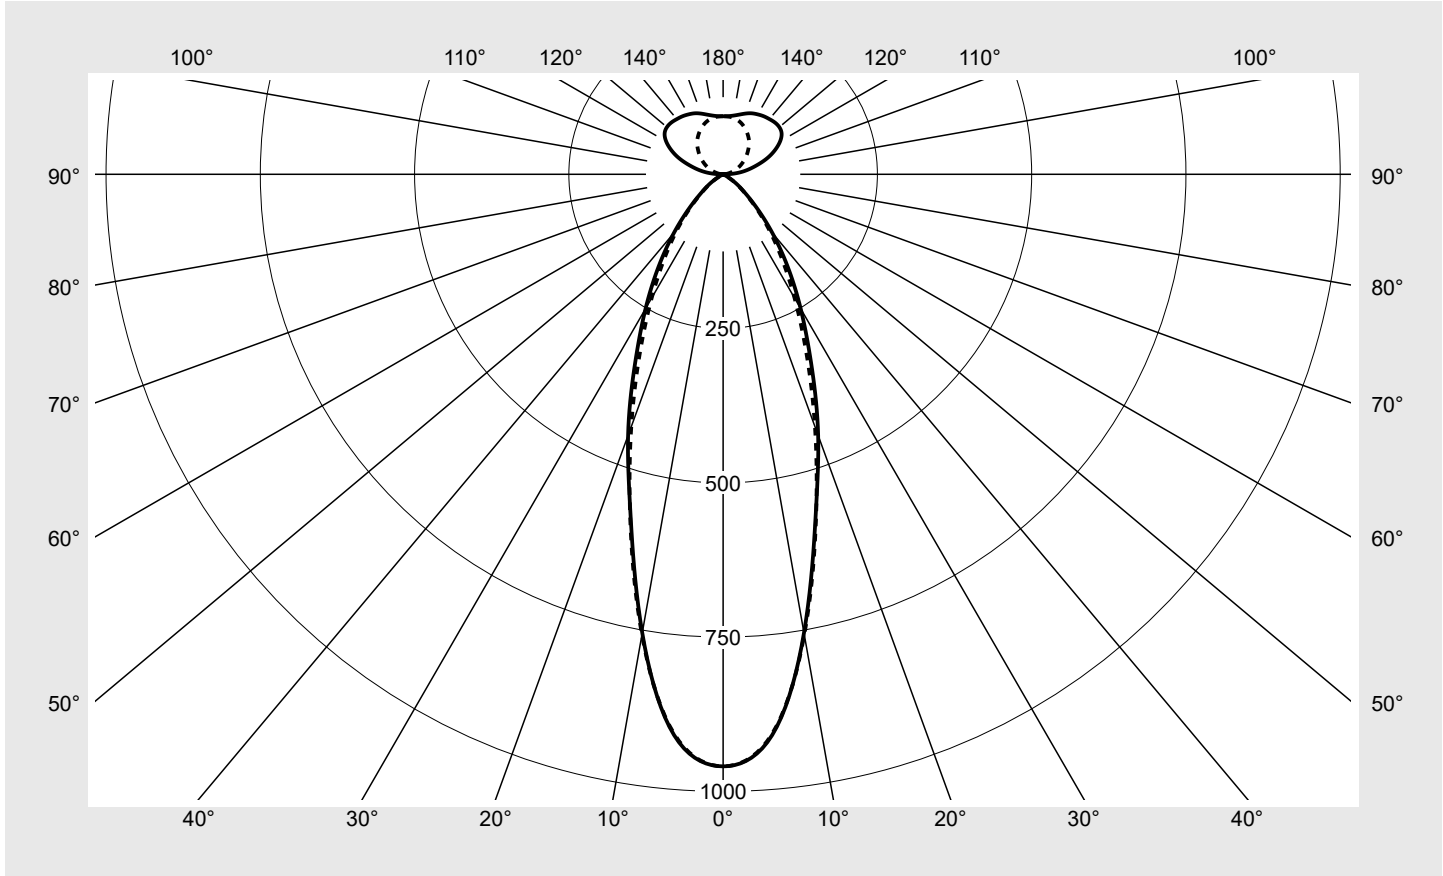

Classifications

DIN 5040	C 7 2
CIE	N1=86 N2=99 N3=100 N4=59 N5=100

Luminaire light output ratios

η_{LB}	100.0%
ϕ_u	59.0%
ϕ_o	41.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX31DC4DBB EAN: 4058352893364	LP number 59281_69
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	959.4	959.4	959.4	959.4	959.4	959.4	959.4	5.7	5.7
5°	912.2	913.2	911.7	911.4	911.5	911.7	910.3	43.6	49.3
10°	754.6	755.9	762.5	767.9	766.9	758.5	757.5	72.5	121.8
15°	578.2	581.5	588.5	595.2	592.8	584.9	581.1	83.3	205.1
20°	450.2	447.9	438.1	432.3	432.3	433.7	435.2	82.1	287.1
25°	337.4	332.5	314.5	302.7	311.9	319.4	319.2	73.7	360.8
30°	251.3	246.8	227.0	216.4	227.8	237.2	231.6	63.8	424.6
35°	181.9	180.8	165.4	156.1	165.0	174.0	165.2	53.2	477.8
40°	124.1	124.5	116.4	111.0	116.6	120.7	113.9	41.6	519.4
45°	77.3	77.7	75.1	73.6	76.6	76.5	72.7	29.4	548.8
50°	44.9	46.1	46.4	46.4	47.6	45.7	43.0	19.3	568.1
55°	25.0	26.0	27.2	27.9	28.2	25.7	24.0	11.9	580.0
60°	7.9	9.6	14.5	15.8	15.1	10.6	8.6	5.8	585.9
65°	2.5	3.1	4.5	8.1	4.9	3.1	2.7	2.2	588.0
70°	1.0	1.1	0.9	1.6	1.1	1.3	1.3	0.6	588.6
75°	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.2	588.8
80°	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.0	588.8
85°	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.2	589.1
90°	4.7	4.6	4.9	4.8	2.9	1.0	0.4	1.9	590.9
95°	22.0	22.5	24.1	22.8	14.6	7.5	3.9	9.5	600.4
100°	39.3	40.4	40.8	35.7	24.0	13.5	8.9	16.1	616.5
105°	56.4	57.6	56.5	48.2	33.0	20.5	15.0	22.2	638.7
110°	75.8	76.1	71.3	59.4	42.3	27.6	21.4	27.9	666.6
115°	92.7	91.8	84.7	69.7	51.3	34.9	28.6	32.5	699.2
120°	106.6	104.9	95.6	78.0	59.7	42.0	35.6	35.7	734.9
125°	115.7	112.5	102.2	85.6	66.8	48.7	43.0	37.1	771.9
130°	118.9	116.2	105.4	90.1	72.2	55.6	50.5	36.7	808.6
135°	118.7	116.2	106.6	93.2	76.5	62.0	57.9	35.1	843.7
140°	116.7	115.0	106.9	95.4	80.1	68.1	65.7	32.7	876.4
145°	114.8	113.6	106.8	96.6	83.5	73.7	72.0	29.7	906.1
150°	112.1	111.6	105.6	96.5	86.2	79.2	77.7	26.2	932.3
155°	109.0	108.7	103.0	96.1	88.3	84.0	82.9	22.2	954.6
160°	104.7	104.4	99.9	95.3	90.2	87.8	87.5	17.9	972.5
165°	100.1	99.5	97.2	94.2	92.0	90.8	90.9	13.5	985.9
170°	96.6	96.1	95.5	94.2	93.3	93.1	93.2	9.0	994.9
175°	94.6	94.5	94.0	93.8	93.8	93.9	93.9	4.5	999.4
180°	94.1	94.1	94.1	94.1	94.1	94.1	94.1	0.6	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX31DC4DBB EAN: 4058352893364	LP number 59281_69
-----------------------------	--	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	14.3	15.1	15.1	15.9	17.0	14.2	15.0	15.0	15.8	16.9
	3H	14.0	14.7	14.9	15.6	16.7	13.9	14.6	14.8	15.5	16.6
	4H	13.8	14.5	14.7	15.4	16.5	13.8	14.4	14.7	15.3	16.4
	6H	13.7	14.3	14.6	15.2	16.3	13.6	14.2	14.5	15.1	16.2
	8H	13.6	14.1	14.5	15.0	16.2	13.5	14.0	14.4	14.9	16.1
	12H	13.5	13.9	14.4	14.9	16.1	13.4	13.9	14.4	14.8	16.0
4H	2H	14.0	14.7	14.9	15.6	16.7	13.9	14.5	14.8	15.4	16.5
	3H	13.7	14.3	14.7	15.2	16.4	13.6	14.2	14.5	15.1	16.2
	4H	13.6	14.1	14.5	15.0	16.2	13.5	14.0	14.4	14.9	16.1
	6H	13.4	13.8	14.4	14.8	16.0	13.3	13.7	14.3	14.7	15.9
	8H	13.3	13.7	14.3	14.6	15.9	13.2	13.6	14.2	14.6	15.8
	12H	13.2	13.5	14.2	14.5	15.7	13.1	13.5	14.1	14.4	15.6
8H	4H	13.3	13.7	14.3	14.7	15.9	13.2	13.6	14.2	14.5	15.8
	6H	13.2	13.5	14.2	14.5	15.7	13.0	13.3	14.0	14.3	15.6
	8H	13.1	13.4	14.1	14.3	15.6	13.0	13.3	14.0	14.2	15.5
	12H	13.0	13.2	14.0	14.2	15.5	12.9	13.1	13.9	14.1	15.4
12H	4H	13.2	13.6	14.2	14.5	15.7	13.1	13.4	14.1	14.4	15.6
	6H	13.1	13.3	14.1	14.3	15.6	13.0	13.2	14.0	14.2	15.5
	8H	13.0	13.2	14.0	14.2	15.5	12.9	13.1	13.9	14.1	15.4


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 2940 B = 49
------------------------	---	--------------------------------------	----------------------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		13826.2	13896.9	13442.3	13176.2	13708.6	13697.1	13011.9	
50°		8846.3	9073.5	9126.6	9142.6	9378.8	8996.7	8471.6	
55°		5510.1	5732.7	5996.5	6161.4	6220.9	5675.3	5284.8	
60°		1999.4	2426.6	3680.7	3987.4	3825.7	2676.2	2168.5	
65°		733.9	919.5	1346.2	2419.7	1465.4	930.9	809.4	
70°		377.0	400.3	337.1	584.2	411.4	462.9	472.1	
75°		95.3	134.5	133.0	170.1	165.7	158.9	129.6	
80°		30.6	40.8	40.8	51.0	66.3	75.8	80.9	
85°		615.6	599.6	583.7	550.3	537.2	530.0	537.2	

Photometric test report

Family Silica® 21	Order number: 51MX31DC4DBB EAN: 4058352893364	LP number 59281_69
------------------------------------	--	-------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85°

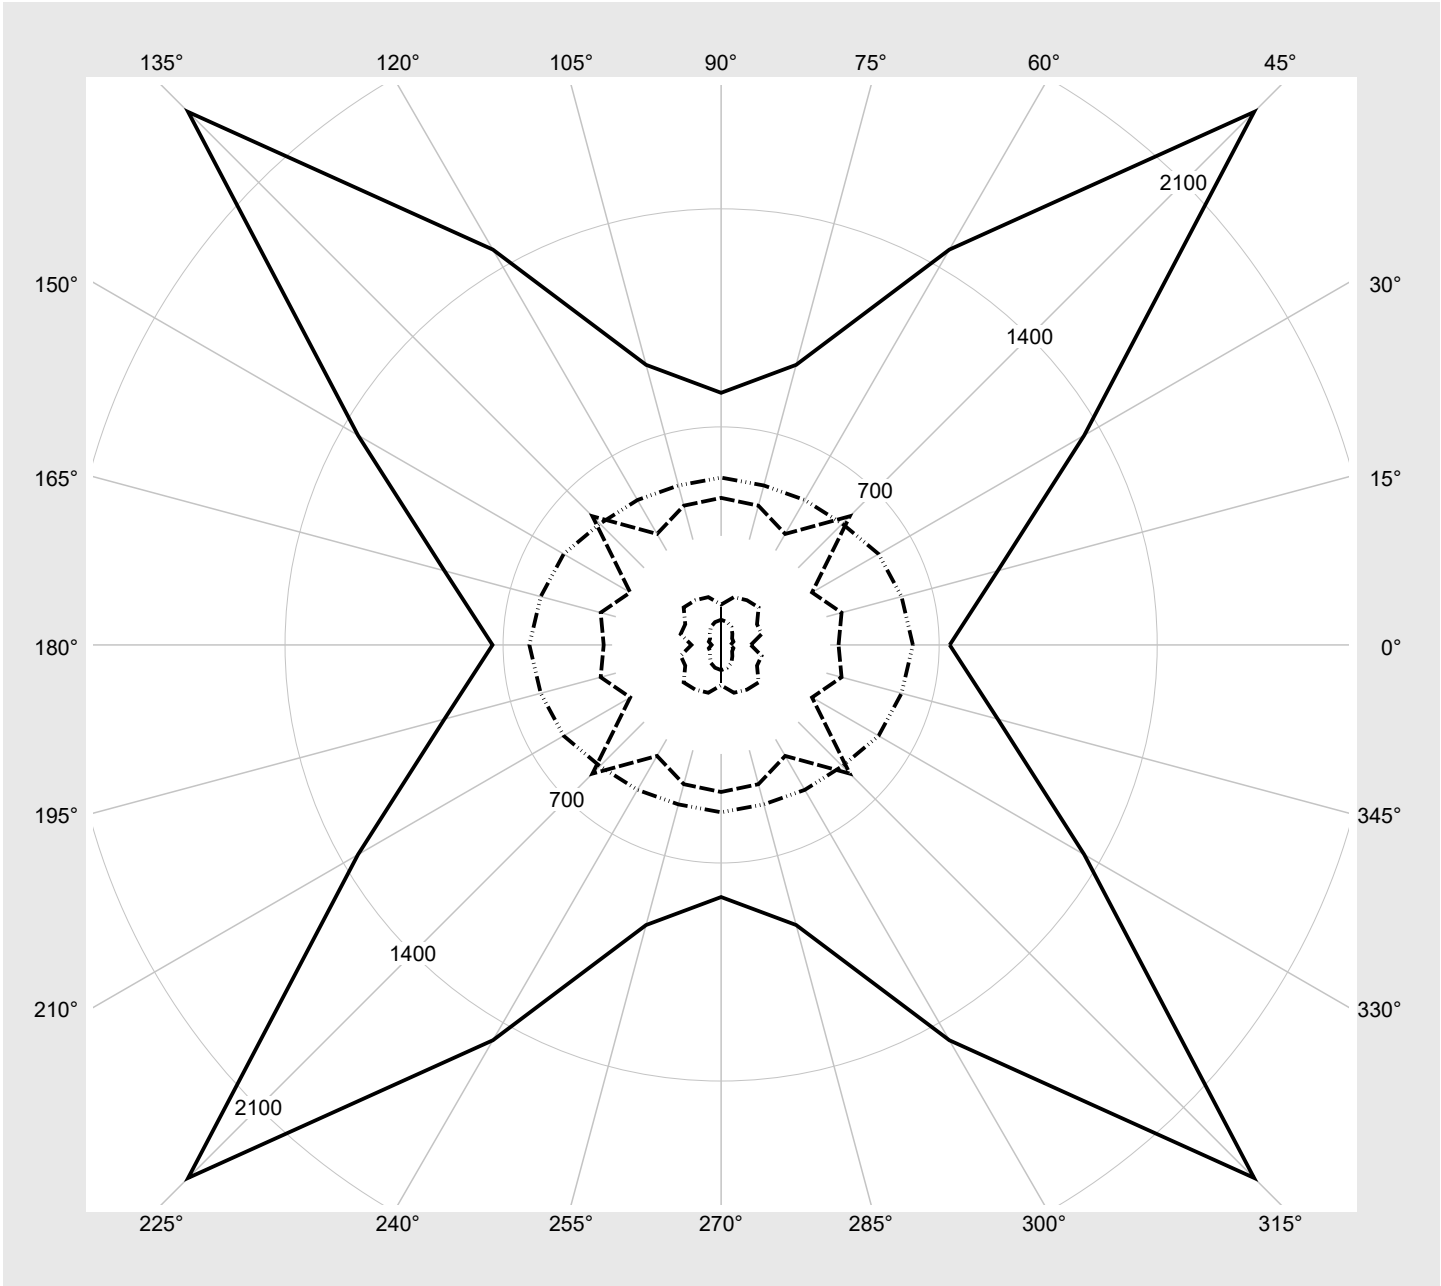

Photometric test report

Family Silica® 21	Order number: 51MX31DC4DBB EAN: 4058352893364	LP number 59281_69
-----------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	18230	105.9
95	241	252	17346	100.3
90	227	250	16389	95.1
85	214	248	15494	89.8
80	201	245	14594	84.3
75	188	243	13687	78.9
70	175	240	12776	74.0
65	162	238	11858	68.7
60	149	234	10929	63.2
55	136	231	9998	58.0
50	124	228	9135	53.2
45	111	224	8194	48.2
40	99	219	7322	43.3
35	86	214	6371	38.1
30	74	209	5489	33.3
25	61	202	4530	27.8
20	49	194	3635	23.0
15	37	183	2741	18.1
10	25	169	1844	13.1
5	13	145	942	8.0
2	5	110	339	3.9