




Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5263ER14H000032 EAN: 4058352564868	LP number 57133_16
	Version post-top- or mounting to wall arm, Smart Interface down Optic asymmetric, wide distribution (ST1.2a) Cover cover transparent, PMMA Lamps LED 3000 K CRI ≥ 80 Controlgear EVG-Smart Interface Rated values Net luminous flux = 1470 lm Power consumption = 14.2 W Luminous efficacy = 103.5 lm/W	serial documentation 22.07.2021





Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 838 cd/klm**

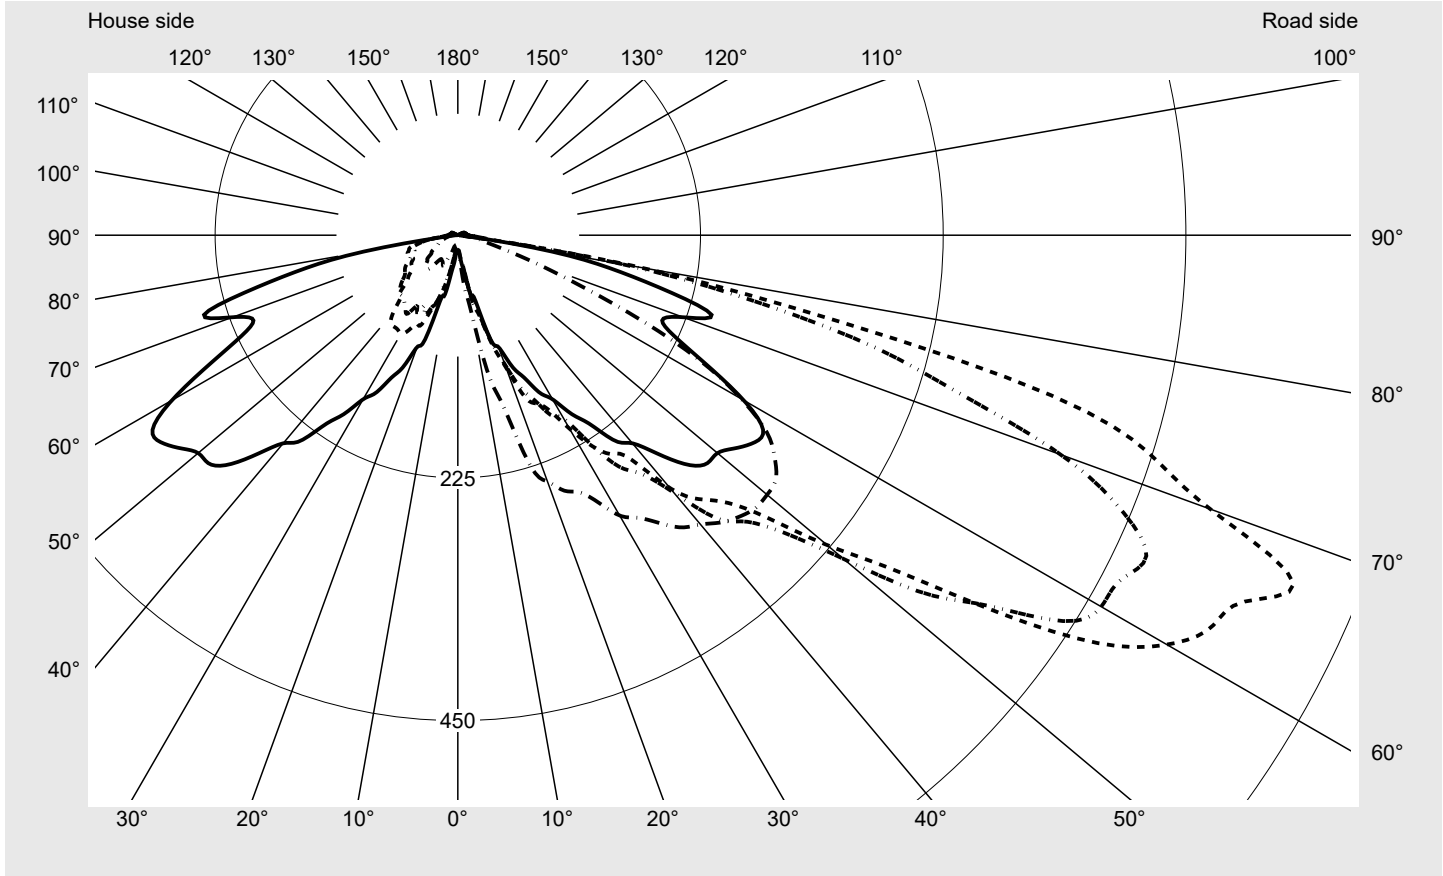

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	97.9%
Eta 90° - 180°	2.1%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	742.0
Imax 80°	184.9
Imax 90°	10.2
Imax >90°	9.5
Imax >95°	8.5


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5263ER14H000032 EAN: 4058352564868	LP number 57133_16
--	--	------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

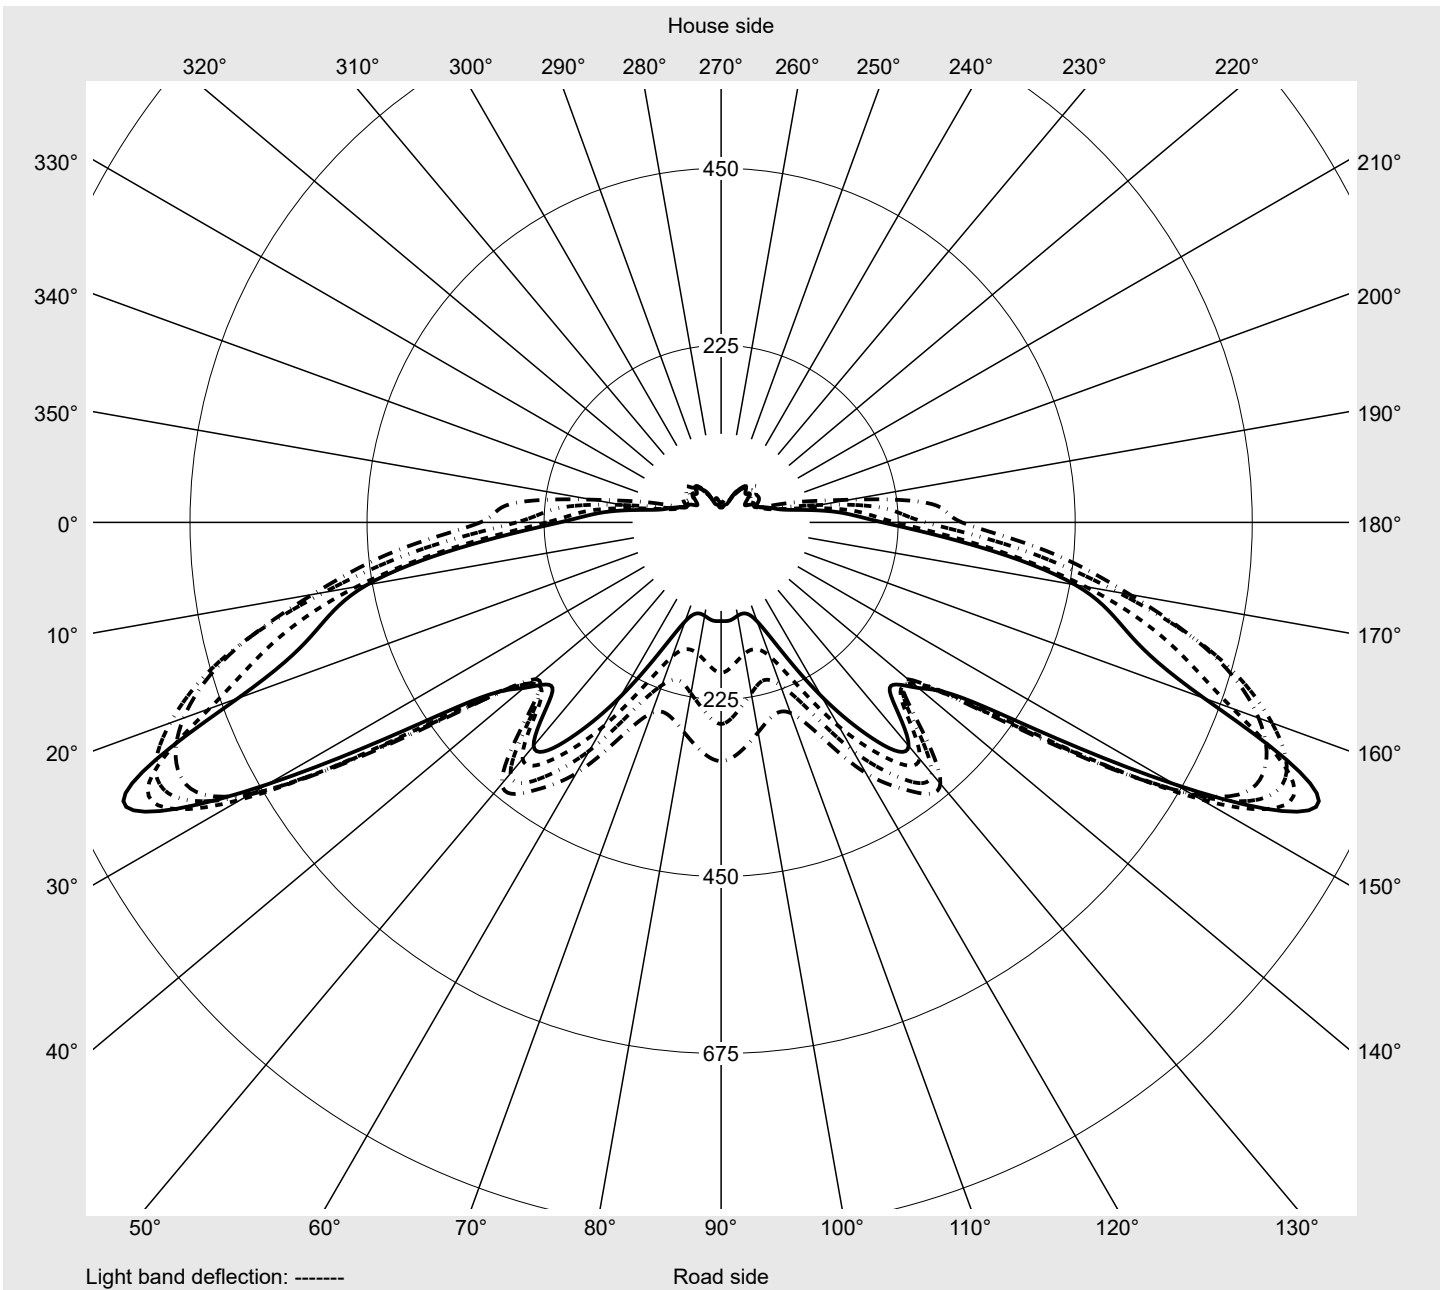

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5263ER14H000032 EAN: 4058352564868	LP number 57133_16
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6
2,5°	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4
5,0°	15.8	16.1	16.4	16.4	17.1	17.4	18.1	18.1	18.4	19.0	19.7	20.4	21.3
7,5°	26.3	27.9	29.2	27.3	24.3	22.7	21.7	21.7	23.0	26.3	30.9	35.1	39.1
10,0°	36.8	34.5	36.1	36.8	35.5	32.5	28.6	31.5	40.1	51.2	60.4	64.4	69.6
12,5°	57.5	65.7	65.0	79.8	68.6	64.4	62.4	62.7	66.0	70.6	79.5	86.0	97.2
15,0°	62.4	66.3	75.8	84.1	83.4	76.8	75.8	77.5	84.4	103.8	112.6	125.4	141.8
17,5°	102.1	116.2	100.5	102.4	98.2	106.7	103.1	103.4	100.5	122.8	142.2	138.6	156.3
20,0°	110.3	130.0	136.6	141.2	138.6	130.3	127.4	119.2	109.7	139.2	152.0	156.3	186.5
22,5°	132.0	174.3	180.3	175.7	178.0	162.2	154.3	150.0	116.2	146.1	170.7	171.4	201.3
25,0°	145.8	169.1	167.8	182.9	172.0	172.0	169.1	162.2	122.1	158.6	181.6	178.3	220.3
27,5°	164.8	185.5	184.9	187.2	183.5	182.6	188.5	183.2	124.8	172.4	197.3	191.1	233.4
30,0°	175.7	203.2	206.5	229.5	221.6	207.2	196.3	184.5	134.3	194.4	227.9	222.6	268.6
32,5°	196.7	236.7	238.4	251.5	241.3	231.8	230.2	217.0	142.5	231.8	284.7	265.6	284.7
35,0°	214.1	251.8	241.7	249.2	237.7	247.6	262.7	238.0	158.6	248.9	304.4	295.5	317.2
37,5°	240.7	281.7	278.1	279.7	266.9	260.0	278.4	262.3	168.1	286.6	328.7	333.6	361.8
40,0°	251.8	291.6	285.7	303.1	296.8	306.0	311.6	264.3	187.8	301.4	360.2	357.6	380.2
42,5°	275.1	302.4	305.4	319.5	312.2	331.9	356.6	299.8	188.1	349.7	396.3	374.0	399.3
45,0°	300.8	319.5	334.6	353.6	341.8	350.0	375.3	306.3	210.8	348.7	418.0	401.6	410.7
47,5°	313.2	337.2	381.5	409.4	393.3	386.1	406.8	329.6	231.5	382.8	434.7	419.3	425.5
50,0°	314.2	363.1	433.7	455.4	446.2	446.9	466.9	371.0	264.0	379.9	444.9	429.8	424.5
52,5°	324.4	371.0	455.4	482.7	507.6	509.6	545.4	408.8	265.0	379.6	448.2	441.3	419.6
55,0°	335.2	393.3	461.6	515.2	577.5	607.4	598.2	436.7	297.1	366.4	454.4	446.2	410.7
57,5°	335.6	412.1	482.0	591.0	673.1	704.0	665.9	445.2	297.5	365.8	458.4	446.9	399.3
60,0°	306.0	414.7	527.3	645.8	726.9	759.1	688.8	446.5	310.3	348.4	433.4	416.0	368.1
62,5°	260.0	378.9	512.5	650.1	745.0	787.3	692.5	439.0	318.8	336.2	416.3	396.0	334.9
65,0°	221.6	330.6	470.2	588.7	692.1	804.1	704.3	429.5	318.5	326.7	392.4	364.8	299.4
67,5°	205.2	317.2	457.0	533.5	653.4	838.2	665.9	408.8	327.4	303.1	370.7	334.9	255.4
70,0°	222.3	337.2	460.7	517.1	643.9	742.0	595.3	370.7	309.3	267.3	327.0	295.5	213.1
72,5°	246.9	370.0	443.3	504.3	597.2	671.8	487.9	333.9	264.0	202.6	276.1	250.2	174.0
75,0°	203.2	311.9	388.4	450.5	536.8	562.8	398.3	267.6	173.0	114.9	210.1	202.9	149.7
77,5°	149.7	223.3	271.9	316.2	361.5	341.1	280.1	152.7	65.7	80.1	181.6	187.5	134.9
80,0°	92.6	110.6	147.8	179.6	184.9	172.0	156.6	79.1	59.1	69.0	96.5	97.8	61.4
82,5°	18.7	17.4	17.1	17.1	16.4	15.8	15.1	14.1	12.5	11.2	11.8	13.8	13.8
85,0°	12.5	12.8	13.1	13.8	13.5	13.5	12.8	11.8	10.8	9.2	9.9	11.8	12.1
87,5°	11.2	11.2	11.8	12.1	12.1	11.5	11.2	10.5	9.2	8.2	8.9	10.5	10.8
90,0°	9.5	9.9	10.2	10.2	10.2	10.2	9.9	9.2	8.2	7.2	7.9	9.2	9.5
92,5°	8.5	8.9	9.5	9.5	9.2	9.2	8.9	8.5	7.9	6.9	6.9	8.2	8.9
95,0°	8.2	8.2	8.9	8.9	8.5	8.2	8.2	7.9	7.2	6.6	6.9	7.6	8.2
97,5°	7.6	7.6	8.2	8.2	7.9	7.6	7.6	7.2	6.6	6.6	6.2	7.2	7.6
100,0°	6.9	6.9	7.6	7.6	7.2	7.2	7.2	6.6	6.6	5.9	6.2	6.9	7.2
102,5°	6.6	6.9	6.9	6.9	6.9	6.6	6.6	6.2	5.9	5.9	5.9	6.2	6.9
105,0°	6.2	6.2	6.2	6.6	6.6	6.2	6.2	5.9	5.9	5.6	5.6	6.2	6.6
107,5°	5.6	6.2	6.2	6.2	5.9	5.9	5.9	5.6	5.6	5.3	5.6	5.9	6.2
110,0°	5.6	5.6	5.6	5.6	5.6	5.6	5.3	5.3	5.3	5.3	5.3	5.6	5.9
112,5°	5.9	5.3	5.3	5.6	5.3	4.9	4.9	4.9	4.9	5.3	5.3	5.3	5.6

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5263ER14H000032 EAN: 4058352564868	LP number 57133_16
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6
2,5°	14.8	15.1	15.1	15.1	15.1	15.1	14.4	14.4	14.4	14.4	14.4	14.4	14.4
5,0°	22.3	22.7	23.0	23.3	24.0	23.6	15.8	15.4	15.1	15.1	15.1	14.8	14.8
7,5°	41.0	42.7	45.3	47.6	49.3	49.9	23.3	21.0	19.4	17.1	16.4	15.4	15.4
10,0°	70.3	69.6	71.6	73.9	74.9	73.5	37.4	35.5	34.5	29.9	26.6	21.3	17.1
12,5°	106.1	114.6	123.5	126.1	133.3	134.0	52.9	43.0	35.5	33.2	36.4	36.1	36.8
15,0°	151.4	154.6	156.6	160.2	165.5	165.5	63.7	93.2	74.5	56.5	52.2	47.9	42.7
17,5°	170.4	188.8	207.2	215.1	225.2	224.6	90.9	86.7	85.7	72.2	64.4	65.7	50.9
20,0°	202.6	209.8	219.3	228.2	241.3	243.0	125.4	117.5	98.2	87.7	76.2	71.6	64.7
22,5°	209.5	218.0	231.8	241.0	252.5	256.1	130.3	138.2	125.1	103.8	90.6	81.1	67.6
25,0°	237.1	246.6	247.2	251.5	262.0	262.7	150.0	125.1	120.2	108.7	90.6	71.6	58.4
27,5°	257.1	263.7	268.9	271.2	276.8	277.8	167.5	145.8	116.9	105.4	99.8	80.8	60.4
30,0°	288.3	292.5	289.3	287.6	297.8	300.1	206.9	148.4	128.7	110.0	105.1	75.8	58.8
32,5°	303.1	311.3	309.0	306.0	308.6	310.6	186.2	170.4	141.8	124.4	103.8	86.0	68.0
35,0°	333.6	339.8	327.4	316.2	323.1	325.7	234.4	178.3	154.6	126.1	103.4	84.4	80.4
37,5°	357.6	354.6	338.2	330.3	336.5	341.5	245.6	199.0	156.3	128.4	102.1	80.8	83.4
40,0°	376.6	360.8	348.0	341.1	347.7	350.0	265.0	206.5	168.1	133.6	92.6	77.8	84.1
42,5°	392.0	369.0	352.3	351.0	356.2	361.2	285.7	218.3	178.6	125.8	78.5	76.2	84.1
45,0°	408.4	377.9	359.9	357.9	366.4	369.0	322.4	224.3	179.6	118.2	76.2	76.2	84.1
47,5°	412.4	375.9	363.5	365.1	372.0	374.3	328.7	234.4	180.3	98.8	64.7	72.6	79.1
50,0°	401.9	371.7	360.5	363.5	372.0	374.3	335.9	234.1	174.0	88.0	59.8	68.0	73.9
52,5°	383.8	351.0	348.0	355.6	365.8	371.7	330.0	234.1	164.8	67.0	54.2	62.4	68.3
55,0°	360.2	327.7	326.7	337.2	351.6	358.5	338.8	231.5	148.1	65.3	51.5	59.8	66.3
57,5°	330.3	290.6	294.8	309.9	327.4	339.5	320.5	206.5	118.2	55.8	50.9	58.1	61.4
60,0°	300.1	257.7	254.5	270.9	291.6	303.4	268.6	166.1	99.8	57.5	49.3	55.2	57.5
62,5°	262.3	220.3	207.8	220.6	241.0	256.1	207.8	127.4	71.2	55.5	46.6	50.6	50.2
65,0°	227.2	181.2	166.8	169.7	181.6	191.1	169.1	102.8	64.7	54.8	48.3	48.3	44.7
67,5°	178.6	134.0	119.8	120.5	125.1	125.4	149.1	91.6	69.0	56.5	48.3	45.3	37.8
70,0°	144.8	104.1	82.7	77.5	79.8	80.8	158.9	101.5	76.2	59.1	49.6	42.7	34.1
72,5°	118.2	78.8	50.9	47.0	47.6	49.3	157.6	98.2	73.9	57.5	47.6	43.7	31.2
75,0°	96.2	58.8	37.1	32.8	31.5	31.5	115.9	75.8	60.7	50.2	46.3	43.7	32.5
77,5°	69.6	35.5	27.6	25.0	23.3	23.0	87.0	60.7	52.9	43.7	41.4	38.1	28.2
80,0°	35.5	22.0	20.4	19.7	19.4	19.0	59.4	48.3	46.0	39.4	35.8	31.5	26.3
82,5°	13.5	13.5	13.8	13.8	13.1	13.1	21.7	23.0	25.3	23.6	22.7	22.0	18.4
85,0°	12.1	12.1	12.1	12.1	11.8	11.8	12.8	13.1	12.8	12.8	12.1	11.8	11.5
87,5°	10.8	10.8	11.2	11.2	11.2	11.2	11.5	11.2	11.2	10.8	10.2	9.9	9.2
90,0°	9.9	10.2	10.2	9.9	9.9	9.9	9.9	9.5	9.2	8.9	8.2	8.2	7.6
92,5°	9.2	9.2	9.5	9.2	9.2	9.2	8.9	8.2	8.2	7.6	7.6	6.9	6.6
95,0°	8.5	8.5	8.9	8.5	8.5	8.5	7.9	7.6	7.6	6.9	6.9	6.2	5.9
97,5°	7.9	7.9	8.2	8.5	7.9	7.9	7.6	6.9	6.9	6.2	6.2	5.9	5.6
100,0°	7.6	7.6	7.9	7.9	7.9	7.9	6.9	6.9	6.2	6.2	5.6	5.6	4.9
102,5°	7.2	7.2	7.6	7.9	7.2	7.2	6.2	6.2	5.9	5.6	5.6	4.9	4.9
105,0°	6.9	7.2	7.2	7.2	7.2	7.2	6.2	5.6	5.6	5.3	4.9	4.9	4.3
107,5°	6.6	6.6	6.9	7.2	7.2	7.2	5.6	5.6	4.9	4.9	4.6	4.3	4.3
110,0°	6.2	6.6	6.6	6.6	6.6	6.6	4.9	4.9	4.9	4.6	4.3	4.3	3.9
112,5°	5.9	6.2	6.6	6.6	6.6	5.9	5.9	5.9	5.3	5.3	4.9	4.9	3.6

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5263ER14H000032 EAN: 4058352564868	LP number 57133_16
Table of values for luminous intensities		Maximum luminous intensity
		sitEco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	0.0	0.0
2,5°	14.4	14.8	15.1	15.1	15.1	15.1	15.1	14.8	14.8	14.8	15.1	0.2	0.2
5,0°	14.8	15.1	15.1	14.8	15.1	15.1	14.8	14.8	14.8	14.8	14.4	0.4	0.6
7,5°	15.1	15.1	14.8	14.4	14.4	14.4	14.4	14.4	14.1	14.1	13.8	0.9	1.5
10,0°	15.8	14.8	14.1	13.8	13.8	13.8	13.8	13.1	12.8	12.8	12.5	1.7	3.2
12,5°	29.9	22.3	17.1	14.1	13.8	13.5	13.1	12.5	12.1	11.8	11.8	3.4	6.6
15,0°	37.1	37.8	34.1	28.2	21.7	14.1	13.8	12.5	11.5	11.5	11.2	5.3	11.9
17,5°	38.4	30.2	25.9	25.6	27.3	26.6	21.7	18.4	13.1	12.1	11.8	7.7	19.6
20,0°	44.7	38.1	33.2	30.2	28.2	21.3	15.1	19.0	23.3	22.3	19.0	10.2	29.8
22,5°	42.7	31.2	30.5	28.2	30.9	25.3	18.4	26.3	28.6	24.0	21.7	12.9	42.7
25,0°	39.1	31.8	28.2	26.9	27.6	24.3	19.4	25.6	27.9	29.2	30.2	14.8	57.5
27,5°	43.3	34.5	29.6	28.9	29.9	29.6	23.3	30.5	30.9	26.6	30.2	17.4	75.0
30,0°	46.3	42.0	36.8	32.8	30.2	26.6	24.3	28.2	32.2	28.6	28.2	20.8	95.7
32,5°	60.1	51.2	38.4	32.5	33.5	32.5	29.6	29.9	30.5	27.6	27.6	24.6	120.3
35,0°	80.4	70.9	56.8	49.3	45.6	37.4	28.6	31.5	29.9	26.9	26.9	28.4	148.7
37,5°	88.3	77.5	65.3	59.8	50.6	41.4	33.5	38.7	36.8	32.8	30.9	32.7	181.4
40,0°	86.0	77.8	67.0	60.7	52.9	40.7	35.8	43.0	44.0	39.7	39.4	36.4	217.8
42,5°	87.0	77.2	66.7	62.1	54.5	43.0	38.7	44.3	46.6	42.7	42.0	40.3	258.2
45,0°	85.0	78.5	68.0	63.0	55.2	44.3	37.4	41.7	45.3	41.7	40.7	44.1	302.2
47,5°	82.4	75.5	65.3	62.1	52.9	43.0	37.1	41.7	41.7	38.7	40.1	48.0	350.2
50,0°	76.5	74.5	64.0	61.1	51.9	42.0	36.8	39.1	41.0	37.4	36.8	51.8	402.0
52,5°	73.2	72.2	63.0	61.7	51.5	40.4	36.1	38.7	37.1	34.8	35.5	54.7	456.7
55,0°	69.0	71.2	62.1	58.8	49.9	39.4	33.8	35.1	35.8	30.9	30.2	57.7	514.4
57,5°	63.7	69.0	61.4	57.5	48.9	38.1	31.5	32.8	32.8	28.2	28.9	60.0	574.4
60,0°	58.1	64.4	57.8	54.5	47.3	37.8	30.2	30.2	31.2	26.3	25.6	60.2	634.6
62,5°	50.6	57.1	53.5	56.1	47.9	38.7	28.6	27.9	27.3	23.0	23.0	57.9	692.5
65,0°	45.0	51.5	49.3	55.5	50.2	41.0	28.6	25.6	25.3	21.3	20.4	54.5	747.0
67,5°	41.7	49.9	47.9	54.5	48.6	41.7	27.9	23.6	22.0	19.0	19.0	51.3	798.4
70,0°	36.8	45.6	47.3	51.5	47.0	39.7	27.9	22.3	20.7	17.4	16.4	48.1	846.4
72,5°	31.2	40.7	42.4	48.9	45.3	34.1	28.6	22.0	16.7	15.8	16.4	43.8	890.2
75,0°	28.6	37.1	36.4	38.7	34.5	26.6	24.0	21.3	16.4	13.8	13.1	36.4	926.7
77,5°	24.0	27.9	27.3	29.2	24.0	19.4	17.7	16.4	12.8	11.5	11.8	26.1	952.7
80,0°	20.7	19.7	18.7	21.3	18.7	17.7	15.4	14.1	11.2	10.2	9.9	15.7	968.4
82,5°	15.1	14.1	12.8	15.4	15.4	15.8	14.4	12.8	9.2	8.9	8.5	4.3	972.7
85,0°	9.5	8.2	7.2	9.5	9.5	9.5	9.5	9.5	7.6	6.9	6.6	3.0	975.7
87,5°	7.6	6.6	5.6	7.2	7.2	7.6	7.2	6.9	5.6	5.6	5.3	2.6	978.3
90,0°	6.6	5.3	4.6	5.3	5.6	5.6	5.3	5.3	4.6	4.3	3.9	2.2	980.6
92,5°	5.6	4.9	3.9	4.6	4.9	4.6	4.6	4.6	3.9	3.9	3.9	2.0	982.6
95,0°	5.3	4.6	3.9	4.3	4.6	4.3	4.3	3.9	3.9	3.6	3.3	1.9	984.4
97,5°	4.9	4.3	3.3	3.9	3.9	3.9	3.9	3.9	3.6	3.3	3.3	1.7	986.1
100,0°	4.9	4.3	3.6	3.6	3.9	3.9	3.6	3.9	3.3	3.3	3.3	1.6	987.7
102,5°	4.3	3.9	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	1.5	989.2
105,0°	4.3	3.6	3.3	3.3	3.3	3.3	3.3	3.3	3.0	2.6	2.6	1.4	990.6
107,5°	3.9	3.6	3.3	3.3	3.0	3.0	2.6	2.6	2.6	2.6	2.6	1.3	991.9
110,0°	3.6	3.6	3.0	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	1.2	993.1
112,5°	3.6	3.3	3.0	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	1.2	994.3

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5263ER14H000032 EAN: 4058352564868	LP number 57133_16
Table of values for luminous intensities		Maximum luminous intensity



C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	5.9	4.9	4.9	4.9	4.9	4.6	4.6	4.6	4.6	4.9	4.9	5.3	5.3
117,5°	4.3	4.3	4.3	4.6	4.3	4.3	4.3	4.3	4.3	4.3	4.6	4.6	4.6
120,0°	4.3	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.9
122,5°	3.0	3.0	3.0	3.0	2.6	2.6	2.3	2.3	2.6	2.6	2.6	3.0	2.6
125,0°	2.0	2.0	2.0	2.0	2.0	1.6	1.6	1.6	1.6	1.6	1.6	2.0	2.0
127,5°	2.0	1.6	1.6	1.6	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
130,0°	1.3	1.3	1.3	3.0	3.0	3.0	3.0	1.3	1.3	1.3	1.3	1.3	1.3
132,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.0	1.0	1.3	1.0	1.0	1.0
135,0°	1.6	1.3	1.3	1.0	1.3	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7
137,5°	1.3	1.3	1.3	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
140,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
142,5°	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
145,0°	1.0	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
147,5°	1.0	1.3	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5263ER14H000032 EAN: 4058352564868	LP number 57133_16
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	5.6	5.9	5.9	5.9	5.9	3.9	4.6	4.3	4.3	4.3	3.6	3.6	3.6
117,5°	4.9	5.3	5.6	5.6	4.3	2.0	4.3	4.3	3.6	3.6	3.6	3.6	3.3
120,0°	3.9	4.3	4.6	4.6	3.3	2.0	3.6	3.6	3.0	3.0	3.0	3.0	3.0
122,5°	3.0	3.3	3.3	3.3	2.3	1.3	2.6	2.3	2.3	2.3	2.3	2.3	2.3
125,0°	2.0	2.0	2.0	2.0	1.3	0.7	2.0	2.0	2.0	2.0	2.0	2.0	2.0
127,5°	1.3	1.3	1.3	1.3	1.3	0.7	1.6	2.0	1.6	2.0	2.0	2.0	2.0
130,0°	1.3	1.3	1.3	1.3	1.0	0.7	1.6	1.3	1.3	1.6	1.6	2.0	1.6
132,5°	1.3	1.3	1.3	1.0	0.7	0.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3
135,0°	0.7	0.7	0.7	0.7	0.7	0.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3
137,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3
140,0°	0.7	0.7	0.7	0.7	0.7	0.7	1.0	1.0	1.3	1.3	1.3	1.3	1.3
142,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3
145,0°	0.7	0.7	0.7	0.7	0.7	0.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3
147,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.0	1.3	1.0	1.3	1.3	1.3	1.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	3.3	3.3	3.0	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	1.1	995.4
117,5°	3.0	3.0	3.0	2.6	2.6	2.0	2.3	2.6	2.6	2.3	2.6	0.9	996.3
120,0°	2.6	2.6	2.6	2.3	2.0	2.0	2.0	2.0	2.0	2.0	2.6	0.8	997.1
122,5°	2.3	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	0.6	997.6
125,0°	2.0	2.0	2.0	2.0	2.0	1.6	1.6	1.6	2.0	2.0	2.0	0.4	998.0
127,5°	2.0	2.0	2.0	2.0	2.0	1.6	1.6	1.6	1.6	1.6	2.0	0.3	998.4
130,0°	1.6	1.6	1.6	1.3	1.3	1.3	1.3	1.6	1.3	1.3	1.3	0.3	998.7
132,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.2	999.0
135,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.2	999.2
137,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.2	999.4
140,0°	1.3	1.3	1.3	1.3	1.3	1.0	1.3	1.3	0.7	1.3	1.3	0.2	999.5
142,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.0	1.0	1.3	1.3	1.3	0.2	999.7
145,0°	1.3	1.3	1.3	1.3	1.3	1.0	1.3	1.3	1.3	1.0	0.7	0.2	999.9
147,5°	1.3	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.7	1.0	1.3	0.1	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5263ER14H000032 EAN: 4058352564868	LP number 57133_16
--	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1470	14.2	14.6	14.4
95	239	252	1395	13.4	13.8	13.6
90	224	249	1321	12.7	13.1	12.9
85	210	247	1250	12.1	12.4	12.2
80	196	245	1177	11.4	11.7	11.6
75	182	242	1104	10.7	11.0	10.8
70	168	239	1029	10.1	10.2	10.1
65	154	236	953	9.4	9.6	9.5
60	141	232	882	8.8	8.9	8.9
55	128	229	810	8.2	8.4	8.3
50	115	225	737	7.6	7.7	7.6
45	102	221	663	7.0	7.2	7.1
40	89	216	588	6.2	6.4	6.3
35	76	210	513	5.7	5.9	5.8
30	64	204	442	5.0	5.2	5.1
25	51	195	365	4.4	4.5	4.4
24	49	194	352	4.3	4.4	4.4