




Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3E31G08MB EAN: 4058352728444	LP number 59077_345												
	<table border="0"> <tr> <td>Version</td> <td>post-top or side-entry mounting</td> </tr> <tr> <td>Optic</td> <td>asymmetric, wide distribution (STW1.0a)</td> </tr> <tr> <td>Cover</td> <td>toughened safety glass</td> </tr> <tr> <td>Lamps</td> <td>LED 3000 K CRI ≥ 70</td> </tr> <tr> <td>Controlgear</td> <td>ECG SITECO iQ</td> </tr> <tr> <td>Rated values</td> <td> Net luminous flux = 19500 lm Power consumption = 146.7 W Luminous efficacy = 132.9 lm/W </td> </tr> </table>	Version	post-top or side-entry mounting	Optic	asymmetric, wide distribution (STW1.0a)	Cover	toughened safety glass	Lamps	LED 3000 K CRI ≥ 70	Controlgear	ECG SITECO iQ	Rated values	Net luminous flux = 19500 lm Power consumption = 146.7 W Luminous efficacy = 132.9 lm/W	serial documentation 15.07.2022 
Version	post-top or side-entry mounting													
Optic	asymmetric, wide distribution (STW1.0a)													
Cover	toughened safety glass													
Lamps	LED 3000 K CRI ≥ 70													
Controlgear	ECG SITECO iQ													
Rated values	Net luminous flux = 19500 lm Power consumption = 146.7 W Luminous efficacy = 132.9 lm/W													

Luminous intensity in cd/klm **C180-0** **C210-30** **C215-35** **C270-90** **Imax: 809 cd/klm**

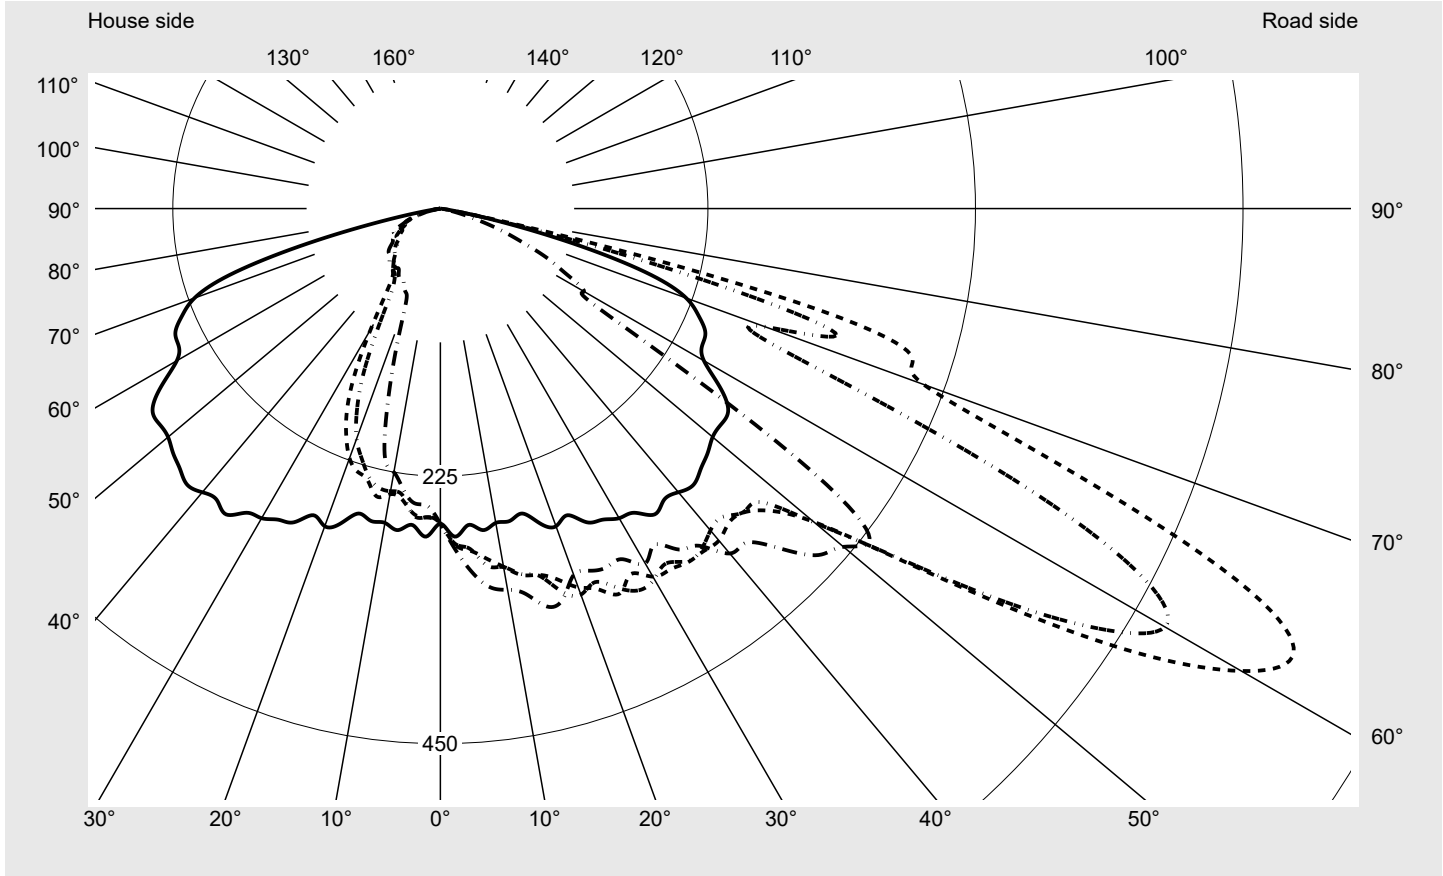

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G4
Imax 70°	498.7
Imax 80°	32.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3E31G08MB EAN: 4058352728444	LP number 59077_345
--	--	--------------------------------------

Envelope curve in cd/klm **KMK 62.5°** **KMK 60°** **KMK 57.5°** **KMK 55°** **siteco**

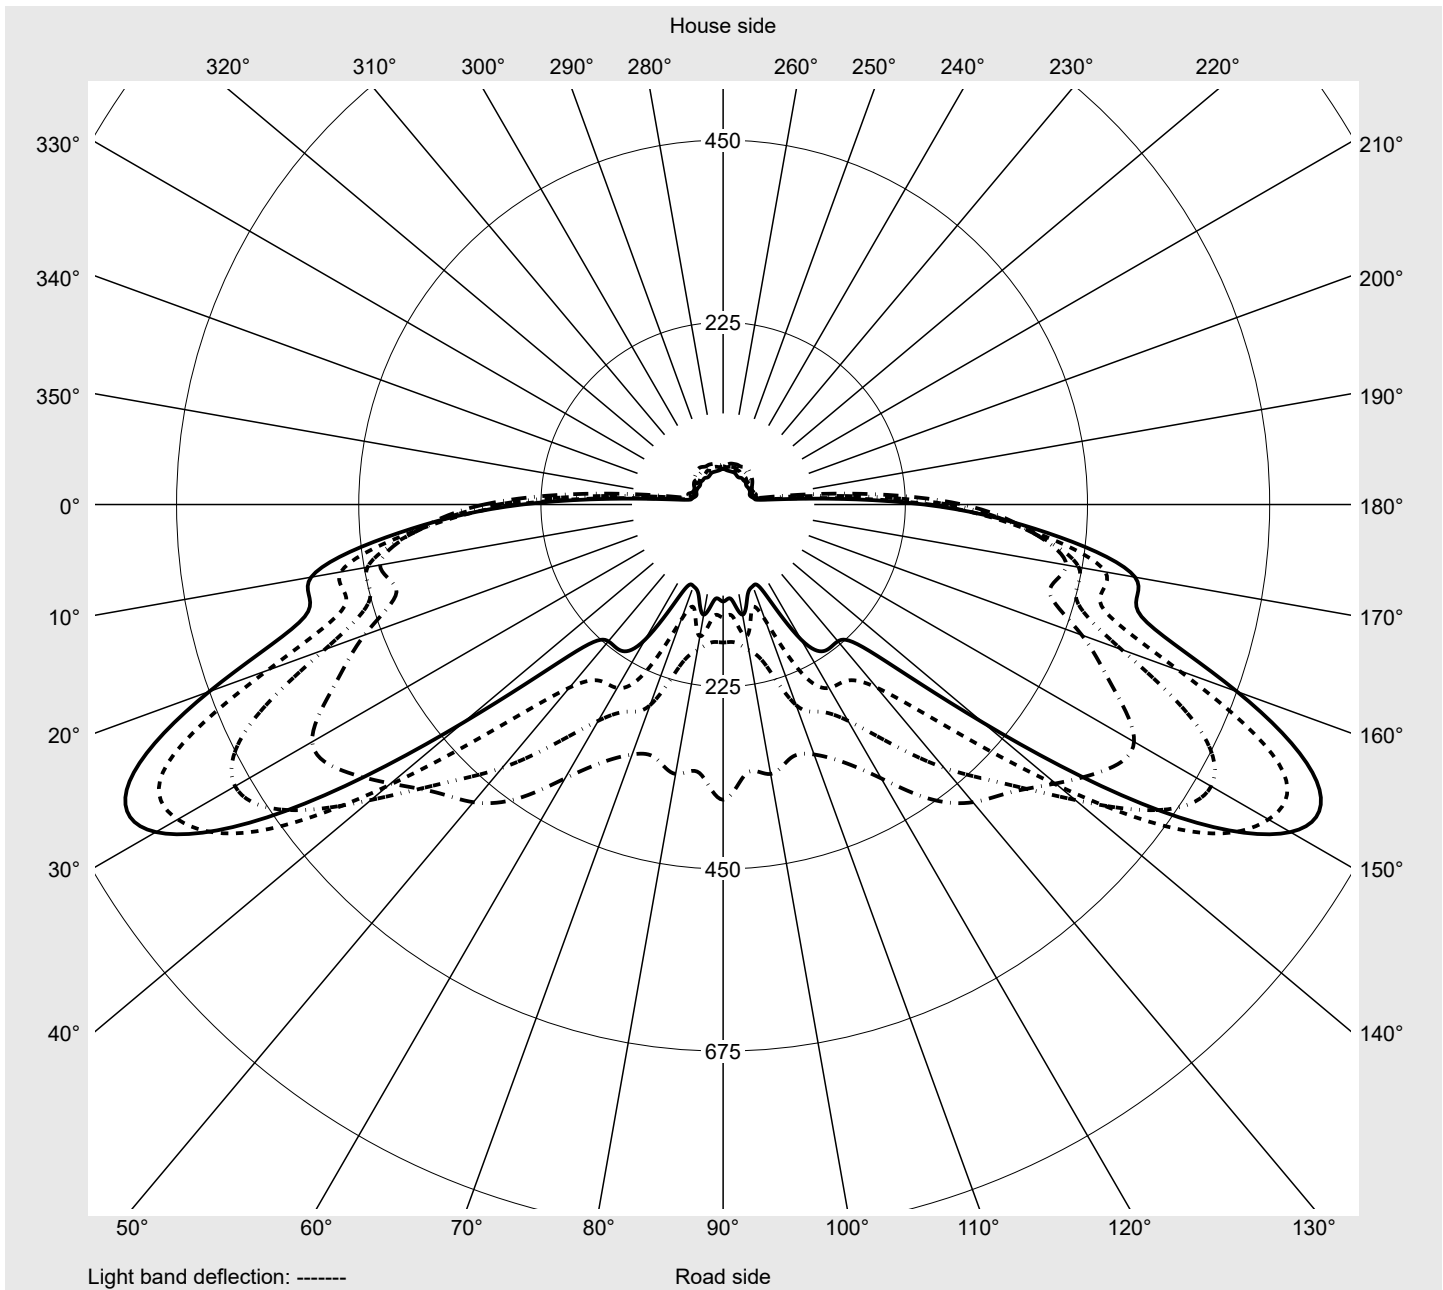

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3E31G08MB EAN: 4058352728444	LP number 59077_345
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0
2,5°	276.1	278.2	279.9	280.7	282.6	280.9	282.9	282.1	283.9	285.0	286.7	288.0	286.1
5,0°	267.2	269.0	274.7	278.5	279.8	286.4	288.9	287.4	290.8	292.6	294.2	300.0	298.6
7,5°	272.7	275.9	280.1	284.4	288.5	292.4	296.9	303.0	303.7	307.0	310.0	310.1	313.3
10,0°	268.4	272.2	277.4	291.4	300.9	306.8	305.9	306.1	302.0	308.4	313.7	316.2	320.5
12,5°	269.1	273.9	287.4	294.7	304.6	314.3	315.6	314.8	322.9	327.5	331.4	330.3	330.5
15,0°	265.5	276.8	296.7	300.8	305.0	315.9	318.9	319.5	329.6	338.0	337.2	339.7	342.1
17,5°	277.4	287.6	299.4	305.4	315.7	326.6	326.9	337.2	336.9	335.5	339.7	341.4	338.5
20,0°	284.3	295.0	304.2	313.5	321.0	328.4	338.9	345.5	343.3	344.8	347.8	341.7	334.4
22,5°	279.1	294.0	312.1	323.0	327.7	341.0	346.5	340.0	341.6	352.4	351.9	343.1	331.1
25,0°	291.0	303.1	317.1	327.0	339.5	348.9	357.1	351.7	350.1	347.4	339.5	333.6	333.4
27,5°	295.0	309.9	321.7	338.0	351.4	356.8	346.6	361.8	356.7	344.1	331.2	337.6	339.9
30,0°	300.7	317.1	328.5	349.8	355.9	355.9	357.4	359.7	352.9	344.8	333.1	337.4	338.9
32,5°	303.3	318.9	336.3	353.9	359.5	349.5	359.8	353.7	348.0	346.4	340.3	346.7	346.0
35,0°	314.0	326.8	340.1	355.5	360.5	357.7	363.1	362.1	346.9	343.3	345.1	341.2	346.2
37,5°	308.9	327.9	347.5	353.8	357.0	355.0	363.3	360.9	349.1	347.9	346.4	345.8	346.0
40,0°	311.4	332.1	344.0	358.4	357.1	363.3	364.4	353.3	357.7	355.2	353.1	353.4	356.3
42,5°	315.1	342.3	354.5	357.4	364.8	358.6	358.8	351.6	354.4	362.5	363.5	361.8	376.7
45,0°	309.7	352.0	364.3	364.3	367.8	375.0	361.3	360.8	367.0	373.0	384.1	397.1	402.7
47,5°	304.8	361.9	365.7	366.2	379.0	381.6	376.2	365.3	379.3	404.4	419.2	437.2	429.1
50,0°	298.9	376.3	386.3	389.3	397.8	415.1	409.9	410.7	417.6	449.6	467.2	465.5	448.8
52,5°	297.8	384.5	408.5	405.9	426.8	460.3	481.7	479.2	484.8	487.2	491.5	476.7	441.4
55,0°	295.5	381.4	430.2	417.6	471.4	530.1	586.0	573.2	535.9	502.5	479.9	443.5	390.5
57,5°	278.4	380.3	445.9	451.7	523.6	645.7	695.9	657.7	567.6	486.1	424.4	359.9	308.3
60,0°	255.9	384.0	479.3	483.8	599.0	757.2	777.7	703.6	540.3	384.0	295.1	265.7	261.6
62,5°	248.4	402.0	516.6	535.0	675.3	808.8	809.0	659.9	419.1	256.1	220.5	220.2	192.6
65,0°	245.9	422.0	553.6	573.4	711.3	776.7	738.3	510.2	243.5	208.7	192.4	191.3	104.6
67,5°	235.0	425.3	575.2	564.4	621.8	656.3	565.5	314.5	192.3	176.6	153.1	147.2	65.3
70,0°	220.0	417.0	498.7	490.7	467.4	475.7	432.4	290.7	186.4	147.5	119.0	82.6	48.3
72,5°	186.1	339.1	400.0	304.5	275.2	335.3	416.1	348.4	176.7	109.9	75.5	56.3	39.4
75,0°	123.0	169.2	172.4	105.2	89.8	211.1	330.5	216.4	77.4	39.2	49.9	41.1	30.5
77,5°	56.5	71.0	62.1	33.2	30.7	82.6	105.1	73.0	43.5	25.3	37.7	26.1	20.2
80,0°	17.1	18.7	17.1	12.0	10.0	32.8	16.7	12.3	11.9	13.6	24.3	14.2	12.9
82,5°	2.8	2.6	2.8	2.7	4.2	12.7	4.3	4.9	3.6	2.7	7.1	7.5	9.0
85,0°	0.6	1.0	0.8	0.7	0.9	0.6	1.1	1.6	1.2	1.0	1.0	1.0	0.9
87,5°	0.2	0.1	0.2	0.1	0.2	0.2	0.1	0.1	0.1	0.1	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3E31G08MB EAN: 4058352728444	LP number 59077_345
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0
2,5°	287.5	287.6	287.1	287.4	287.0	287.0	273.3	268.1	264.9	264.2	262.9	260.1	259.7
5,0°	298.8	299.6	303.6	304.8	306.2	307.1	263.9	264.0	263.7	260.2	262.6	257.7	259.0
7,5°	311.1	312.7	314.2	315.4	319.9	321.2	264.6	260.9	257.4	253.9	248.6	246.6	243.3
10,0°	322.2	321.1	324.7	324.1	330.8	325.5	261.4	256.1	251.1	248.3	244.7	244.0	241.3
12,5°	332.1	335.3	335.1	332.5	329.2	332.0	262.3	260.1	252.5	246.3	242.6	247.9	240.3
15,0°	337.6	337.3	338.6	345.5	346.4	346.4	261.0	256.5	253.2	248.3	245.2	236.4	233.1
17,5°	341.6	341.9	341.5	339.9	341.6	343.8	270.2	262.3	253.8	247.9	241.6	232.0	220.2
20,0°	335.0	333.0	331.7	327.6	328.6	327.9	267.8	260.8	255.7	239.3	232.0	223.3	206.1
22,5°	329.0	328.2	327.2	332.2	325.7	329.6	271.4	267.7	246.7	240.9	224.1	206.9	183.3
25,0°	334.2	338.9	333.4	328.8	331.6	332.3	273.9	267.1	247.9	230.6	210.1	185.4	153.1
27,5°	345.0	340.9	338.0	336.9	330.6	332.5	281.1	265.5	244.5	212.3	189.3	154.5	114.5
30,0°	347.4	348.6	347.5	338.6	338.7	344.5	287.4	263.9	231.2	198.3	160.4	116.8	84.4
32,5°	348.4	347.2	343.8	343.5	341.8	335.2	290.9	256.1	220.6	179.3	126.7	86.3	72.1
35,0°	347.0	345.2	346.6	347.5	342.5	350.1	287.0	243.6	204.1	146.9	96.2	70.3	66.8
37,5°	350.1	351.8	356.0	359.3	353.9	357.4	278.7	226.5	179.7	108.7	69.8	65.7	65.1
40,0°	361.0	366.3	369.3	373.6	367.6	378.6	271.5	211.0	146.0	80.9	62.4	61.5	61.5
42,5°	385.5	380.9	382.4	379.9	385.9	381.1	253.2	192.1	110.3	60.5	58.0	57.7	57.7
45,0°	410.8	397.6	391.9	399.7	411.0	404.2	243.1	159.0	76.9	55.3	55.2	53.6	54.0
47,5°	433.6	414.0	411.4	415.7	420.3	431.3	227.6	126.7	55.1	50.4	51.7	51.7	52.1
50,0°	445.6	425.7	419.8	449.5	443.7	442.5	210.7	88.3	49.0	47.6	47.1	49.3	47.6
52,5°	416.0	395.0	398.9	443.8	448.1	454.9	180.9	59.1	45.7	45.0	43.8	45.3	45.8
55,0°	351.0	328.5	323.8	337.9	333.0	364.6	154.6	48.8	43.8	42.1	39.9	41.0	43.9
57,5°	282.3	263.7	206.2	182.5	171.1	170.4	121.8	44.9	41.6	41.3	39.9	40.0	43.9
60,0°	229.7	151.7	135.7	165.2	139.3	139.5	86.6	41.6	37.8	38.2	38.7	36.9	40.7
62,5°	120.0	107.2	116.5	138.1	117.6	119.8	77.0	39.6	36.3	35.0	36.5	37.2	37.1
65,0°	83.4	91.6	95.7	104.6	97.6	100.3	69.3	36.7	32.8	31.9	34.4	37.0	32.8
67,5°	67.6	73.1	74.5	77.1	78.6	76.2	54.0	28.7	29.8	27.7	32.7	34.8	32.1
70,0°	52.0	55.8	56.0	55.7	56.2	56.3	41.4	23.6	24.9	23.4	27.3	28.8	27.1
72,5°	39.0	39.0	37.7	39.2	37.6	36.6	39.4	19.2	19.3	19.8	21.9	22.2	21.5
75,0°	24.8	24.3	23.5	23.2	21.8	20.8	33.9	14.3	14.8	15.1	17.1	14.6	15.3
77,5°	14.2	13.2	12.7	11.4	11.4	9.5	22.2	10.4	8.7	9.2	11.9	11.0	10.9
80,0°	7.8	5.8	5.4	4.1	4.0	2.8	9.0	5.5	5.3	4.7	5.5	5.6	6.8
82,5°	3.8	1.6	1.4	1.0	1.4	0.9	2.5	2.3	2.2	2.3	2.5	2.8	3.4
85,0°	0.6	0.4	0.3	0.3	0.3	0.4	0.8	0.7	0.8	0.8	0.7	0.9	1.0
87,5°	0.1	0.1	0.1	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3E31G08MB EAN: 4058352728444	LP number 59077_345
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	0.4	0.4
2,5°	256.9	256.0	255.6	256.1	254.6	252.5	250.9	249.4	248.9	249.4	250.4	3.2	3.6
5,0°	255.7	253.9	254.1	252.3	249.0	249.7	248.6	248.0	246.8	248.4	248.8	6.5	10.2
7,5°	240.3	241.6	243.4	240.7	241.4	239.6	241.1	240.8	239.1	237.5	238.3	9.8	20.0
10,0°	240.0	236.3	237.0	232.8	230.3	226.3	227.2	227.7	229.3	228.1	225.1	13.0	33.0
12,5°	232.1	228.4	226.2	223.2	220.3	215.5	208.4	206.4	206.3	212.3	215.0	16.3	49.3
15,0°	228.7	218.0	206.6	202.2	200.2	193.2	184.1	176.9	174.8	172.2	172.4	19.2	68.5
17,5°	209.4	198.3	189.0	174.2	161.0	148.0	139.2	129.3	122.8	121.0	123.7	21.6	90.1
20,0°	192.2	169.1	150.1	131.9	115.1	104.2	97.2	89.9	88.2	86.4	85.0	23.5	113.6
22,5°	156.5	129.9	107.3	94.2	82.7	77.8	78.4	76.9	75.2	76.8	76.1	25.4	139.0
25,0°	117.5	93.4	80.0	74.6	74.6	73.9	73.1	74.0	72.0	74.0	72.3	27.6	166.6
27,5°	87.2	75.8	71.2	72.6	73.4	71.9	71.0	71.6	70.4	71.1	67.8	29.8	196.4
30,0°	73.6	70.2	72.9	71.5	70.4	71.0	69.8	70.1	68.1	67.3	68.0	32.0	228.4
32,5°	67.8	68.1	67.7	70.5	70.7	68.2	67.0	65.7	64.1	63.6	65.2	33.9	262.4
35,0°	66.4	67.3	66.7	66.1	65.8	64.8	64.9	64.1	64.6	62.1	61.4	35.8	298.2
37,5°	67.0	67.1	66.4	64.8	64.1	62.0	62.1	63.5	62.3	64.1	62.6	37.7	335.9
40,0°	65.2	69.2	62.8	60.8	59.4	59.4	62.3	62.4	60.3	60.0	60.4	39.8	375.7
42,5°	64.4	66.3	68.6	56.9	57.5	58.5	59.4	60.7	57.9	58.0	62.3	42.0	417.7
45,0°	61.0	62.0	77.2	58.2	58.6	59.2	60.0	59.8	60.6	60.1	60.3	44.9	462.5
47,5°	53.1	53.8	65.9	58.5	59.2	58.8	59.9	60.0	59.8	59.0	57.8	47.8	510.3
50,0°	49.0	52.4	58.1	59.5	60.2	57.5	58.4	56.2	56.5	55.8	56.8	51.7	562.1
52,5°	47.6	51.8	55.7	54.3	55.8	54.5	53.9	54.8	53.8	53.5	53.4	54.9	616.9
55,0°	47.0	49.2	51.3	53.6	53.4	51.8	52.2	51.8	51.3	49.3	48.8	55.2	672.1
57,5°	45.4	44.7	46.5	47.9	48.4	48.5	47.8	47.7	47.4	46.4	47.2	53.2	725.3
60,0°	41.2	41.2	43.3	43.3	43.7	45.9	44.1	44.4	44.6	44.1	43.7	51.8	777.1
62,5°	37.1	39.0	39.1	39.8	38.6	39.5	41.5	41.8	42.1	42.8	44.1	49.6	826.7
65,0°	33.4	34.7	37.0	36.8	35.8	36.8	38.8	37.6	40.4	42.1	41.9	46.0	872.7
67,5°	29.7	31.0	32.3	32.5	32.0	32.6	33.8	36.5	37.1	35.6	34.6	40.0	912.8
70,0°	25.9	28.0	28.5	28.5	28.1	28.2	29.6	31.2	31.7	30.2	29.9	33.5	946.3
72,5°	21.7	23.7	24.6	25.3	25.5	26.0	25.4	26.6	27.1	26.8	25.0	26.9	973.2
75,0°	17.0	18.4	21.4	20.6	20.1	20.9	20.3	21.1	22.0	20.0	20.2	15.6	988.8
77,5°	12.3	14.7	16.6	16.7	16.2	16.3	15.3	12.3	9.2	7.0	6.0	7.1	995.9
80,0°	7.5	8.6	11.2	12.9	13.0	11.5	9.3	6.4	3.8	1.9	1.2	2.8	998.7
82,5°	3.8	4.4	5.7	8.4	8.1	7.0	4.2	2.7	1.4	0.5	0.4	1.1	999.7
85,0°	1.4	1.4	1.6	1.6	1.8	1.5	0.8	0.5	0.4	0.1	0.1	0.2	1000.0
87,5°	0.2	0.2	0.2	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3E31G08MB EAN: 4058352728444	LP number 59077_345
--	--	--------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	19500	146.7	161.2	154.0
95	241	252	18502	135.9	149.3	142.6
90	229	250	17581	126.6	138.9	132.8
85	216	248	16583	117.1	128.4	122.8
80	203	246	15585	107.9	118.3	113.1
75	190	243	14587	99.3	108.6	104.0
70	178	241	13665	91.5	100.1	95.8
65	165	238	12667	83.4	91.3	87.4
60	152	235	11669	75.7	82.7	79.2
55	140	232	10748	68.9	75.2	72.1
50	127	229	9750	61.7	67.3	64.5
45	114	225	8752	54.7	59.6	57.2
40	102	221	7831	48.3	52.8	50.6
35	89	216	6833	41.7	45.4	43.6
30	76	210	5835	35.3	38.5	36.9
25	63	203	4837	29.2	31.7	30.4
20	51	195	3915	23.8	25.8	24.8
15	38	184	2917	18.1	19.5	18.8
11	27	172	2073	13.3	14.3	13.8

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	19500	141.2	147.7	144.4
95	241	252	18502	131.5	137.4	134.4
90	229	250	17581	123.1	128.5	125.8
85	216	248	16583	114.1	119.2	116.6
80	203	246	15585	105.6	110.2	107.9
75	190	243	14587	97.3	101.6	99.4
70	178	241	13665	90.1	94.0	92.0
65	165	238	12667	82.4	85.9	84.2
60	152	235	11669	74.9	78.1	76.5
55	140	232	10748	68.2	71.2	69.7
50	127	229	9750	61.2	63.8	62.5
45	114	225	8752	54.4	56.7	55.6
40	102	221	7831	48.1	50.3	49.2
35	89	216	6833	41.6	43.4	42.5
30	76	210	5835	35.3	36.8	36.0
25	63	203	4837	29.3	30.4	29.8
20	51	195	3915	23.9	24.7	24.3
15	38	184	2917	18.2	18.8	18.5
11	27	172	2073	13.4	13.9	13.6

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3E31G08MB EAN: 4058352728444	LP number 59077_345
--	--	--------------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	19500	143.5	152.2	147.8
95	241	252	18502	133.4	141.3	137.4
90	229	250	17581	124.6	131.9	128.2
85	216	248	16583	115.4	122.2	118.8
80	203	246	15585	106.6	112.7	109.6
75	190	243	14587	98.2	103.8	101.0
70	178	241	13665	90.7	95.8	93.2
65	165	238	12667	82.8	87.5	85.2
60	152	235	11669	75.2	79.5	77.4
55	140	232	10748	68.5	72.3	70.4
50	127	229	9750	61.4	64.8	63.1
45	114	225	8752	54.5	57.5	56.0
40	102	221	7831	48.2	50.9	49.6
35	89	216	6833	41.6	43.9	42.8
30	76	210	5835	35.3	37.2	36.2
25	63	203	4837	29.1	30.7	29.9
20	51	195	3915	23.8	24.9	24.4
15	38	184	2917	18.1	18.9	18.5
11	27	172	2073	13.4	14.0	13.7

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3E31G08MB EAN: 4058352728444	LP number 59077_345
--	--	--------------------------------------

Luminousfluxs table	sITeco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	19500.0	146.7
5.0	19500.0	141.2
15.0	19500.0	143.5