




# Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3V31D08MB</b> <b>EAN: 4069025163783</b>	<b>LP number</b> <b>59539_302</b>
	<b>Version</b> post-top or side-entry mounting <b>Optic</b> asymmetric, extremely wide distribution (P0.5a) <b>Cover</b> toughened safety glass <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 19170 lm Power consumption = 146.7 W Luminous efficacy = 130.7 lm/W	<b>serial documentation</b> <b>18.01.2024</b>





**Luminous intensity in cd/klm** C180-0 C190-10 C195-15 C270-90 **Imax: 326 cd/klm**

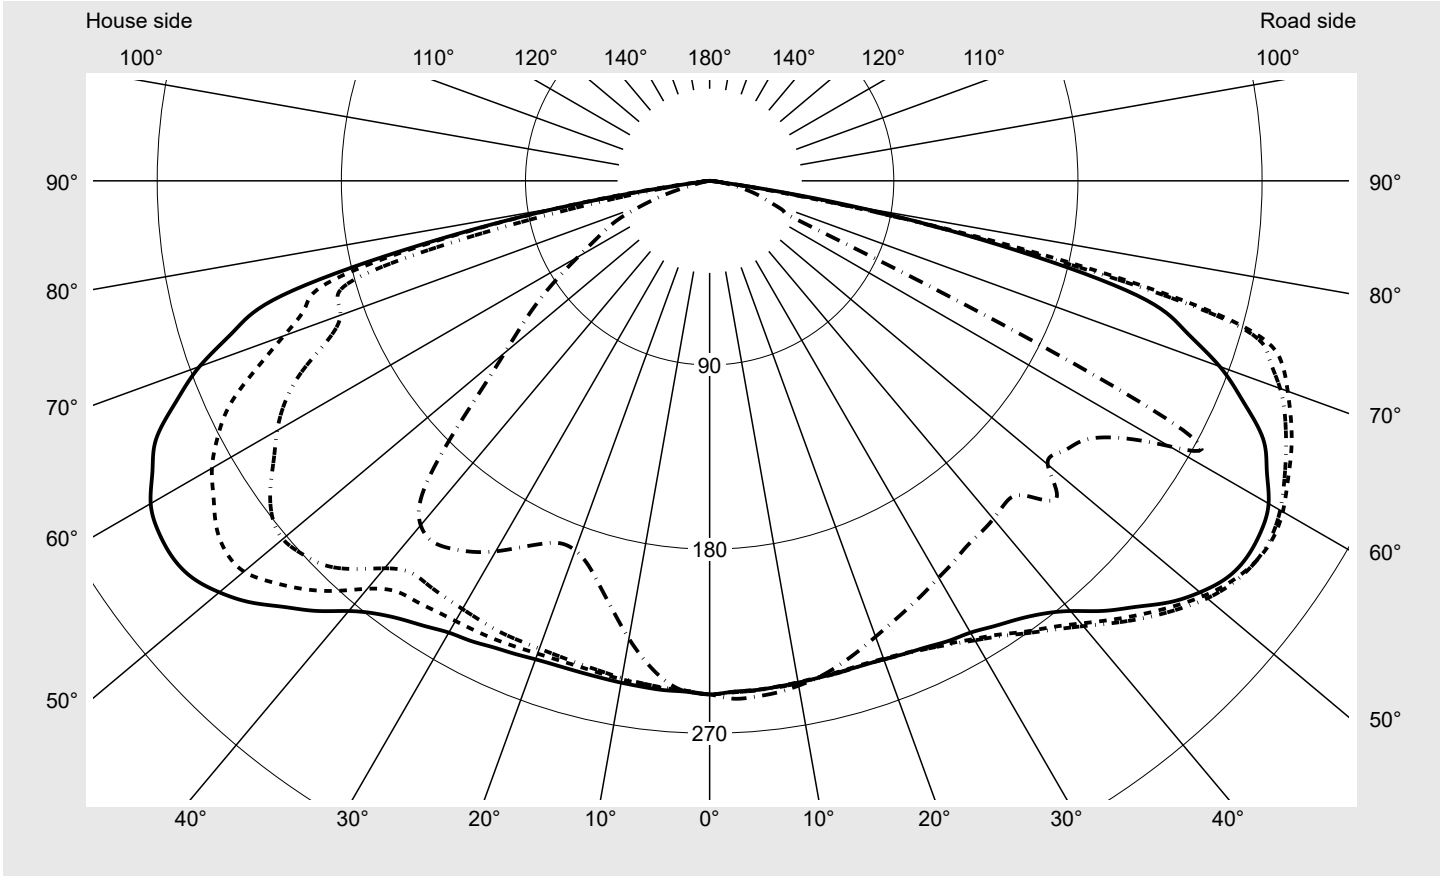


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	300.7
Imax 80°	79.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Photometric test report**

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3V31D08MB</b> <b>EAN: 4069025163783</b>	<b>LP number</b> 59539_302
------------------------------------------	----------------------------------------------------------------	-------------------------------

**Envelope curve in cd/klm**      **KMK 57.5°**    **KMK 55°**    **KMK 52.5°**    **KMK 50°**      **siteco**

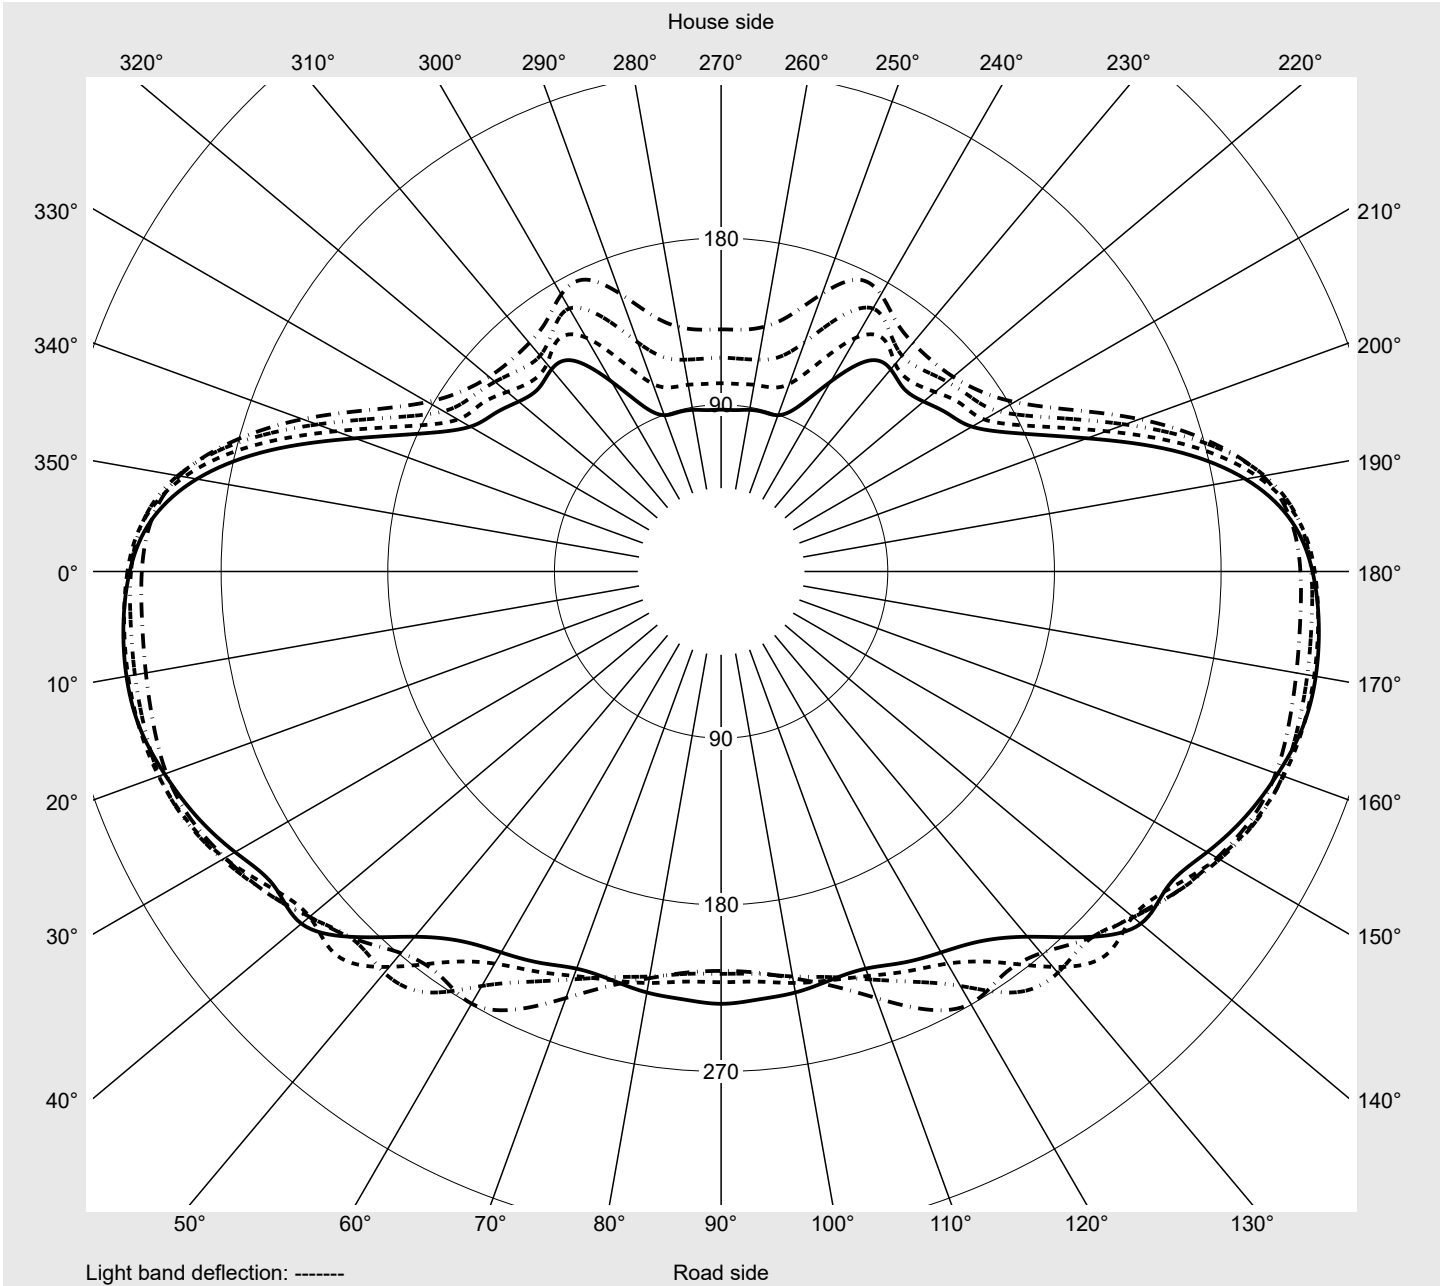

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3V31D08MB</b> <b>EAN: 4069025163783</b>	<b>LP number</b> <b>59539_302</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0
2,5°	250.0	250.0	250.1	250.3	250.7	251.0	251.0	251.2	251.5	251.6	251.7	252.0	252.3
5,0°	249.9	249.8	249.8	250.2	250.6	250.8	251.0	251.2	251.6	251.6	251.8	252.1	252.3
7,5°	249.5	249.5	249.4	249.8	250.3	250.6	250.8	250.9	251.2	251.3	251.4	251.6	251.7
10,0°	249.0	248.9	248.9	249.3	249.7	250.0	250.2	250.3	250.5	250.6	250.7	250.7	250.6
12,5°	248.6	248.5	248.3	248.8	249.3	249.5	249.6	249.6	249.6	249.6	249.6	249.6	249.4
15,0°	248.3	248.3	248.1	248.6	249.0	249.0	249.0	248.9	248.7	248.7	248.5	248.2	247.7
17,5°	248.3	248.2	247.9	248.3	248.7	248.8	248.8	248.6	248.1	247.7	247.3	246.6	245.9
20,0°	248.9	249.0	248.5	249.0	249.2	249.1	249.0	248.5	247.8	247.2	246.4	245.4	244.2
22,5°	250.1	250.1	249.8	250.3	250.5	250.3	249.9	249.1	248.0	246.9	245.8	244.0	242.5
25,0°	251.4	251.8	251.8	252.3	252.4	252.0	251.1	249.9	248.3	246.5	244.7	242.8	240.9
27,5°	253.4	254.0	254.8	255.4	255.5	255.0	253.7	252.1	249.6	247.0	244.5	242.2	239.4
30,0°	255.0	256.9	258.5	259.3	259.3	258.5	257.2	254.9	251.6	248.3	245.1	241.9	238.5
32,5°	258.2	260.9	263.0	263.9	264.2	263.3	261.6	258.6	254.5	250.7	246.4	242.2	238.0
35,0°	261.7	266.1	269.0	269.9	270.0	269.4	267.1	263.1	258.6	254.1	248.8	243.6	238.9
37,5°	266.8	271.5	274.9	276.5	276.5	275.8	273.3	268.9	263.8	258.0	251.8	246.1	240.6
40,0°	274.5	279.0	282.4	284.1	284.4	283.4	280.9	275.8	270.4	263.3	256.0	249.1	242.3
42,5°	285.1	287.7	290.9	293.0	293.3	292.0	288.8	283.0	276.7	268.6	260.2	252.3	244.4
45,0°	294.5	296.9	299.4	301.9	302.8	301.6	297.2	290.6	283.0	273.7	264.6	255.2	246.2
47,5°	304.8	305.7	307.7	310.1	311.4	309.8	304.3	297.0	287.8	277.8	267.8	257.0	248.7
50,0°	312.8	313.9	315.5	317.5	318.8	316.1	309.3	300.9	290.1	280.4	269.0	265.7	269.5
52,5°	318.7	320.1	321.5	322.6	322.8	318.8	310.8	301.1	290.5	281.1	282.9	277.4	258.4
55,0°	320.6	323.6	325.2	325.3	323.2	318.2	309.6	297.3	290.1	293.3	278.7	257.5	244.5
57,5°	319.4	324.0	326.1	325.1	319.8	312.7	303.1	295.2	295.9	279.2	257.5	243.8	237.5
60,0°	315.5	321.1	323.5	322.0	313.2	302.4	294.6	297.8	286.2	257.4	242.9	234.2	227.4
62,5°	307.0	315.3	318.5	316.7	303.4	288.4	283.0	286.1	266.8	239.5	228.9	220.3	213.3
65,0°	298.5	308.0	313.6	310.8	293.9	274.5	258.2	254.1	246.7	219.3	210.7	200.1	196.9
67,5°	282.4	297.5	307.6	304.5	284.9	260.4	237.6	233.8	224.5	196.1	181.4	175.2	177.5
70,0°	265.3	283.6	300.7	296.7	273.8	244.0	215.8	202.6	190.5	173.9	157.0	152.6	154.2
72,5°	243.6	269.1	292.8	286.6	258.3	222.1	190.7	169.6	160.0	149.0	134.1	128.7	126.5
75,0°	216.2	240.5	264.2	259.5	228.1	191.8	159.7	140.2	129.3	121.7	108.1	103.8	102.5
77,5°	145.0	162.5	166.8	154.2	137.4	126.2	120.6	109.9	99.3	92.4	79.4	77.3	75.9
80,0°	69.5	56.9	56.8	60.7	61.0	60.2	65.4	60.8	54.6	59.0	55.1	55.2	45.6
82,5°	6.3	5.3	5.3	7.2	14.9	17.9	23.4	25.2	24.8	26.7	24.9	30.5	22.9
85,0°	2.5	2.5	2.4	2.4	2.3	2.3	2.1	2.2	3.8	5.7	6.8	8.1	5.9
87,5°	1.4	1.4	1.4	1.2	1.2	1.2	1.1	1.1	1.0	1.0	1.0	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3V31D08MB</b> <b>EAN: 4069025163783</b>	<b>LP number</b> <b>59539_302</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0
2,5°	252.3	252.3	252.7	252.9	253.1	253.3	250.0	249.6	249.6	249.8	249.7	249.6	249.6
5,0°	252.3	252.4	252.6	252.9	253.0	253.1	249.5	249.0	248.8	248.8	248.3	248.1	247.8
7,5°	251.6	251.6	251.7	252.1	252.3	252.3	249.0	248.2	247.8	247.4	246.7	245.9	245.0
10,0°	250.3	250.2	250.3	250.4	250.5	250.5	248.3	247.4	246.8	245.8	244.4	242.9	241.2
12,5°	248.9	248.6	248.4	248.3	248.3	248.3	247.6	246.5	245.5	244.0	241.7	239.3	236.5
15,0°	247.0	246.2	245.8	245.4	245.2	244.9	247.3	245.8	244.5	242.2	239.2	235.6	231.8
17,5°	244.7	243.5	242.5	241.7	241.2	241.1	247.2	245.6	243.7	240.6	236.5	232.0	226.9
20,0°	242.7	241.0	239.5	238.3	237.5	237.1	247.7	245.9	243.3	239.2	234.0	228.1	221.9
22,5°	240.8	238.9	236.9	234.9	234.1	233.5	248.7	246.6	243.2	237.9	231.2	224.1	216.7
25,0°	239.0	236.8	234.2	231.8	230.7	230.1	250.0	247.4	243.1	236.4	228.5	220.4	212.1
27,5°	236.8	234.2	231.6	229.1	227.5	227.0	251.3	247.9	242.3	234.8	225.8	216.6	207.6
30,0°	235.1	231.9	229.1	226.5	224.6	223.9	252.4	248.4	241.6	232.7	222.7	212.6	203.0
32,5°	234.4	230.8	227.1	224.2	221.9	221.3	254.5	249.3	241.1	230.7	219.4	208.0	197.7
35,0°	234.7	230.0	225.7	222.3	219.4	218.5	257.2	250.7	240.7	228.3	215.2	202.1	191.5
37,5°	235.1	229.6	224.5	220.5	217.8	217.1	260.8	252.7	240.9	226.3	210.7	196.0	185.4
40,0°	235.7	229.1	223.6	219.4	216.7	215.7	268.8	260.3	247.2	229.4	209.2	191.2	180.0
42,5°	237.0	229.2	222.7	218.0	214.7	213.8	279.8	271.8	257.3	236.8	212.4	190.4	176.4
45,0°	238.2	230.1	224.1	220.4	218.0	217.4	290.5	281.9	265.7	242.9	216.1	191.3	174.9
47,5°	246.9	247.6	243.5	237.5	231.8	229.8	300.6	290.3	270.0	243.5	214.7	189.5	173.3
50,0°	260.9	245.1	231.6	223.0	217.4	215.7	309.1	297.1	272.4	240.5	207.0	183.1	170.2
52,5°	244.4	234.4	226.8	222.1	218.1	217.3	313.3	298.0	269.5	232.2	196.7	173.0	164.4
55,0°	238.2	232.4	228.5	225.6	222.3	221.8	313.2	294.4	262.1	221.4	185.8	164.2	158.0
57,5°	233.0	228.2	228.4	230.8	232.0	233.5	309.4	287.5	252.5	210.3	176.6	156.4	149.0
60,0°	223.2	221.3	227.4	239.2	253.0	259.4	304.3	280.9	244.1	201.6	167.7	146.0	137.4
62,5°	206.8	211.0	228.8	255.9	259.3	251.4	295.4	271.1	233.9	189.1	153.8	128.8	122.0
65,0°	191.1	200.2	214.8	159.1	99.5	81.1	284.6	258.6	219.5	173.2	136.8	113.8	106.5
67,5°	173.1	177.0	104.3	45.0	40.1	39.3	268.1	239.7	201.3	160.9	126.0	98.9	86.9
70,0°	153.9	102.1	38.9	34.7	33.3	32.7	246.7	221.4	192.0	159.1	115.1	78.0	67.2
72,5°	111.9	41.5	29.4	28.3	27.3	27.0	224.7	207.4	190.7	144.1	81.8	52.9	48.5
75,0°	61.2	23.5	22.1	21.8	21.5	21.6	197.8	193.8	171.7	100.8	45.9	35.1	33.8
77,5°	29.7	16.3	15.8	15.8	15.3	15.1	138.8	139.4	99.3	39.4	22.0	21.2	22.0
80,0°	13.6	10.4	10.2	9.9	9.6	9.4	79.4	70.3	36.0	12.7	11.5	11.9	12.6
82,5°	6.5	5.7	5.7	5.6	5.2	5.2	10.5	13.4	8.3	5.6	5.6	5.7	6.0
85,0°	2.4	2.3	2.3	2.2	2.1	2.1	2.5	2.5	2.5	2.4	2.4	2.3	2.3
87,5°	0.9	0.9	0.9	0.8	0.9	0.9	1.4	1.4	1.5	1.4	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3V31D08MB</b> <b>EAN: 4069025163783</b>	<b>LP number</b> <b>59539_302</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	0.4	0.4
2,5°	249.5	249.6	249.6	249.4	249.5	249.6	249.9	249.8	249.8	249.8	250.0	3.0	3.4
5,0°	247.3	247.0	246.7	246.3	246.1	245.9	245.8	245.6	245.4	245.5	245.5	6.0	9.3
7,5°	243.8	242.8	241.6	240.6	239.8	239.1	238.5	237.9	237.5	237.3	237.3	8.8	18.2
10,0°	239.2	237.1	235.1	233.3	231.6	230.3	229.2	228.1	227.5	227.3	227.2	11.6	29.8
12,5°	233.5	230.3	227.4	224.7	222.2	220.1	218.5	217.4	216.5	216.1	216.0	14.2	44.0
15,0°	227.8	223.5	219.5	216.0	213.0	210.5	208.6	207.2	206.3	205.9	205.8	16.8	60.8
17,5°	221.8	216.7	211.9	207.7	204.2	201.5	199.5	198.2	197.5	197.2	197.1	19.2	80.0
20,0°	215.8	210.0	205.0	200.6	197.2	194.7	193.1	192.4	192.1	192.1	192.2	21.6	101.6
22,5°	210.0	204.1	199.0	194.9	192.2	190.6	190.1	190.3	190.7	191.4	191.7	24.0	125.5
25,0°	204.8	198.6	194.1	191.3	190.1	190.3	191.3	192.8	194.3	195.5	195.9	26.4	151.9
27,5°	199.8	194.0	190.6	189.8	190.5	192.5	195.2	197.9	200.0	201.7	202.1	28.9	180.8
30,0°	195.2	190.2	188.5	189.8	192.7	196.4	200.1	203.5	206.3	208.3	209.1	31.3	212.2
32,5°	190.1	186.9	187.5	190.9	195.4	199.9	204.5	208.4	211.9	214.2	215.0	33.8	246.0
35,0°	185.4	184.1	186.9	191.8	197.2	202.0	207.3	211.8	215.6	218.4	219.5	36.3	282.3
37,5°	180.7	181.6	185.8	191.4	196.6	201.5	207.1	212.4	217.4	221.0	222.3	38.8	321.1
40,0°	176.7	178.7	183.2	188.2	193.3	198.3	204.5	211.1	216.0	218.7	219.7	41.2	362.3
42,5°	172.5	174.4	178.4	183.2	188.3	194.4	202.4	209.1	210.7	209.0	208.0	43.7	406.0
45,0°	168.5	169.0	172.8	177.7	183.6	192.3	199.7	198.2	190.3	183.1	180.9	46.0	452.0
47,5°	165.7	164.8	167.4	172.3	179.5	187.1	185.5	173.5	160.7	153.4	151.6	48.2	500.1
50,0°	163.6	160.9	161.1	164.8	172.7	173.9	159.6	143.1	134.2	131.1	130.7	49.4	549.6
52,5°	159.4	154.0	152.1	158.4	164.0	151.5	131.7	119.8	116.1	115.3	115.4	50.2	599.8
55,0°	150.8	145.1	146.3	153.1	145.8	124.0	107.8	103.0	102.4	101.7	101.7	50.5	650.3
57,5°	142.8	139.6	142.5	139.0	118.5	98.1	89.8	89.0	88.6	87.5	87.4	50.3	700.6
60,0°	133.7	133.9	130.8	113.2	90.4	79.0	76.1	75.9	75.7	74.4	74.2	49.7	750.2
62,5°	121.6	118.6	103.6	83.7	70.2	66.2	64.9	64.9	65.1	63.8	63.5	48.1	798.4
65,0°	104.0	95.2	77.1	64.1	59.9	58.1	56.9	56.9	57.6	55.8	55.5	43.5	841.8
67,5°	82.3	70.1	58.1	53.2	52.4	50.9	49.3	49.4	50.1	47.9	46.8	38.6	880.4
70,0°	61.0	51.7	46.0	45.5	45.4	43.4	40.4	39.0	38.7	35.7	35.0	34.6	915.0
72,5°	43.8	39.1	37.3	37.4	36.9	33.9	30.2	28.6	27.5	24.9	24.2	30.4	945.4
75,0°	32.1	30.1	29.5	29.0	27.9	24.8	21.3	19.4	16.5	13.2	12.4	25.4	970.8
77,5°	22.1	21.5	20.5	20.2	18.7	15.1	11.1	9.0	7.4	5.4	5.2	17.0	987.8
80,0°	12.1	11.9	10.1	9.0	8.4	7.2	5.8	4.6	3.8	2.1	1.9	8.5	996.3
82,5°	5.8	5.3	4.7	4.5	4.4	3.7	3.0	2.4	1.7	1.2	1.0	2.7	999.0
85,0°	2.1	2.1	1.9	1.8	1.7	1.5	1.3	1.1	0.9	0.8	0.7	0.7	999.7
87,5°	1.1	1.1	1.1	1.0	1.0	0.9	0.8	0.7	0.7	0.7	0.7	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3V31D08MB</b> <b>EAN: 4069025163783</b>	<b>LP number</b> 59539_302
------------------------------------------	----------------------------------------------------------------	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	19170	146.7	161.2	154.0
95	241	252	18189	135.9	149.3	142.6
90	229	250	17283	126.6	138.9	132.8
85	216	248	16302	117.1	128.4	122.8
80	203	246	15321	107.9	118.3	113.1
75	190	243	14340	99.3	108.6	104.0
70	178	241	13434	91.5	100.1	95.8
65	165	238	12453	83.4	91.3	87.4
60	152	235	11472	75.7	82.7	79.2
55	140	232	10566	68.9	75.2	72.1
50	127	229	9585	61.7	67.3	64.5
45	114	225	8604	54.7	59.6	57.2
40	102	221	7698	48.3	52.8	50.6
35	89	216	6717	41.7	45.4	43.6
30	76	210	5736	35.3	38.5	36.9
25	63	203	4755	29.2	31.7	30.4
20	51	195	3849	23.8	25.8	24.8
15	38	184	2868	18.1	19.5	18.8
11	27	172	2038	13.3	14.3	13.8

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	19170	141.2	147.7	144.4
95	241	252	18189	131.5	137.4	134.4
90	229	250	17284	123.1	128.5	125.8
85	216	248	16302	114.1	119.2	116.6
80	203	246	15321	105.6	110.2	107.9
75	190	243	14340	97.3	101.6	99.4
70	178	241	13434	90.1	94.0	92.0
65	165	238	12453	82.4	85.9	84.2
60	152	235	11472	74.9	78.1	76.5
55	140	232	10566	68.2	71.2	69.7
50	127	229	9585	61.2	63.8	62.5
45	114	225	8604	54.4	56.7	55.6
40	102	221	7698	48.1	50.3	49.2
35	89	216	6717	41.6	43.4	42.5
30	76	210	5736	35.3	36.8	36.0
25	63	203	4755	29.3	30.4	29.8
20	51	195	3849	23.9	24.7	24.3
15	38	184	2868	18.2	18.8	18.5
11	27	172	2038	13.4	13.9	13.6

## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3V31D08MB</b> <b>EAN: 4069025163783</b>	<b>LP number</b> 59539_302
------------------------------------------	----------------------------------------------------------------	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	19170	143.5	152.2	147.8
95	241	252	18188	133.4	141.3	137.4
90	229	250	17283	124.6	131.9	128.2
85	216	248	16301	115.4	122.2	118.8
80	203	246	15320	106.6	112.7	109.6
75	191	244	14415	98.8	104.5	101.6
70	178	241	13434	90.7	95.8	93.2
65	165	238	12452	82.8	87.5	85.2
60	152	235	11471	75.2	79.5	77.4
55	140	232	10566	68.5	72.3	70.4
50	127	229	9585	61.4	64.8	63.1
45	114	225	8604	54.5	57.5	56.0
40	102	221	7698	48.2	50.9	49.6
35	89	216	6717	41.6	43.9	42.8
30	76	210	5736	35.3	37.2	36.2
25	64	204	4830	29.6	31.2	30.4
20	51	195	3849	23.8	24.9	24.4
15	38	184	2868	18.1	18.9	18.5
11	27	172	2038	13.4	14.0	13.7

**Photometric test report**

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3V31D08MB</b> <b>EAN: 4069025163783</b>	<b>LP number</b> 59539_302
------------------------------------------	----------------------------------------------------------------	-------------------------------

**Luminousfluxs table** **sITeco**

Temperature °C	Luminous flux lm	Power consumption W
25.0	19170.0	146.7
5.0	19170.0	141.2
15.0	19170.0	143.5