

Photometric test report

Family
CITY-LIGHT PLUS LED

Order number: **5XA5275KF14HP**
EAN: **4058352835272**

LP number
58710_19



Version post-top- or mounting to wall arm
Optic asymmetric, wide distribution (ST1.2a)
Cover cover transparent, PMMA
Lamps LED 4000 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 4710 lm
Power consumption = 33.6 W
Luminous efficacy = 140.2 lm/W

serial
documentation
24.05.2022

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 821 cd/klm

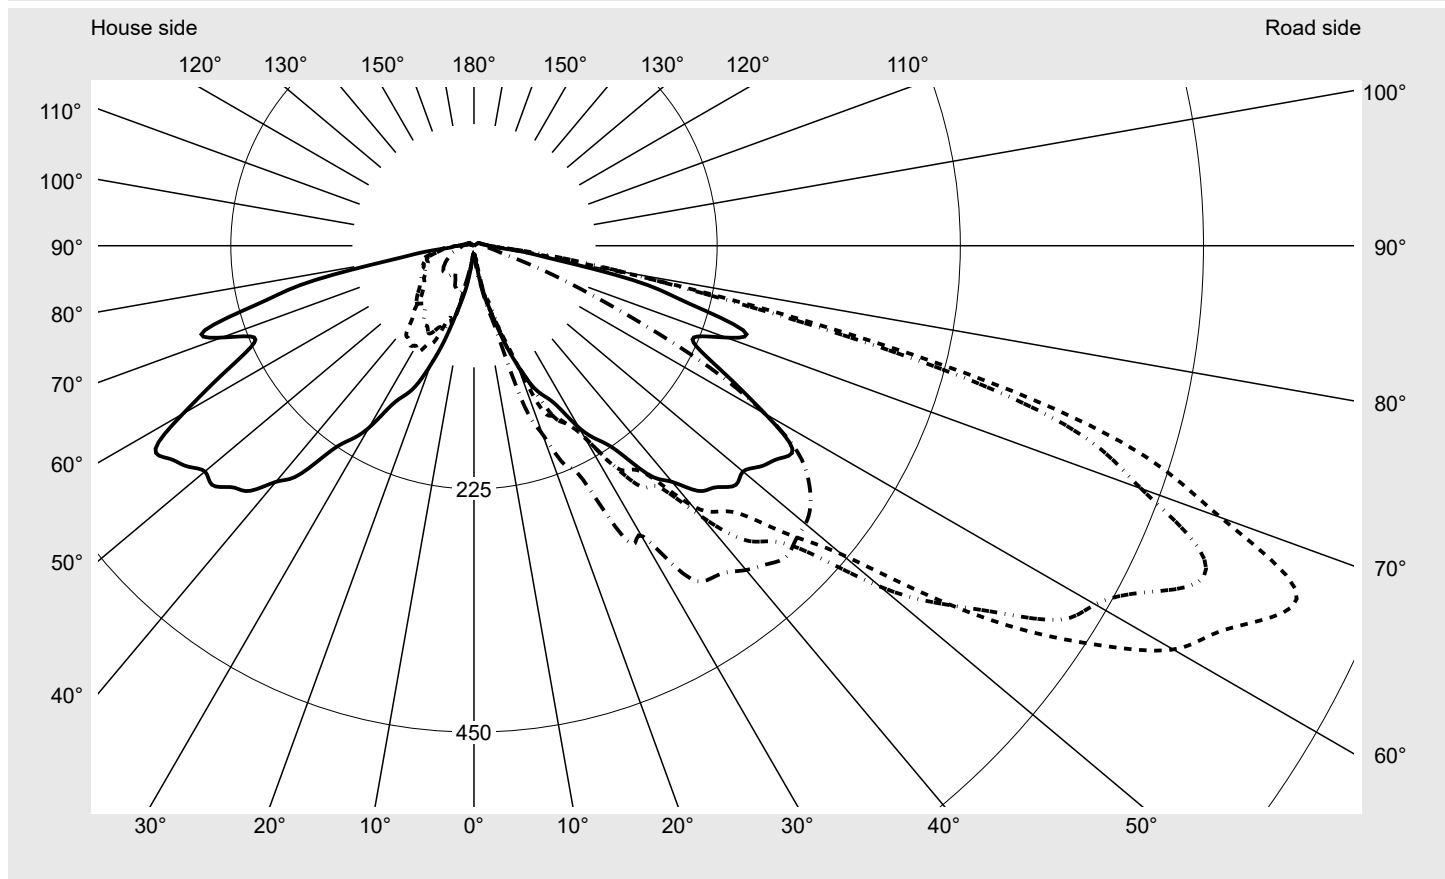

Luminaire output ratios

Eta 100.0%
Eta 0° - 90° 97.3%
Eta 90° - 180° 2.7%

Luminous intensity class acc. to EN13201-2

Class: G1
Imax 70° 735.4
Imax 80° 151.9
Imax 90° 15.0
Imax >90° 13.0
Imax >95° 9.8


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275KF14HP EAN: 4058352835272	LP number 58710_19
---	---	-------------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°**

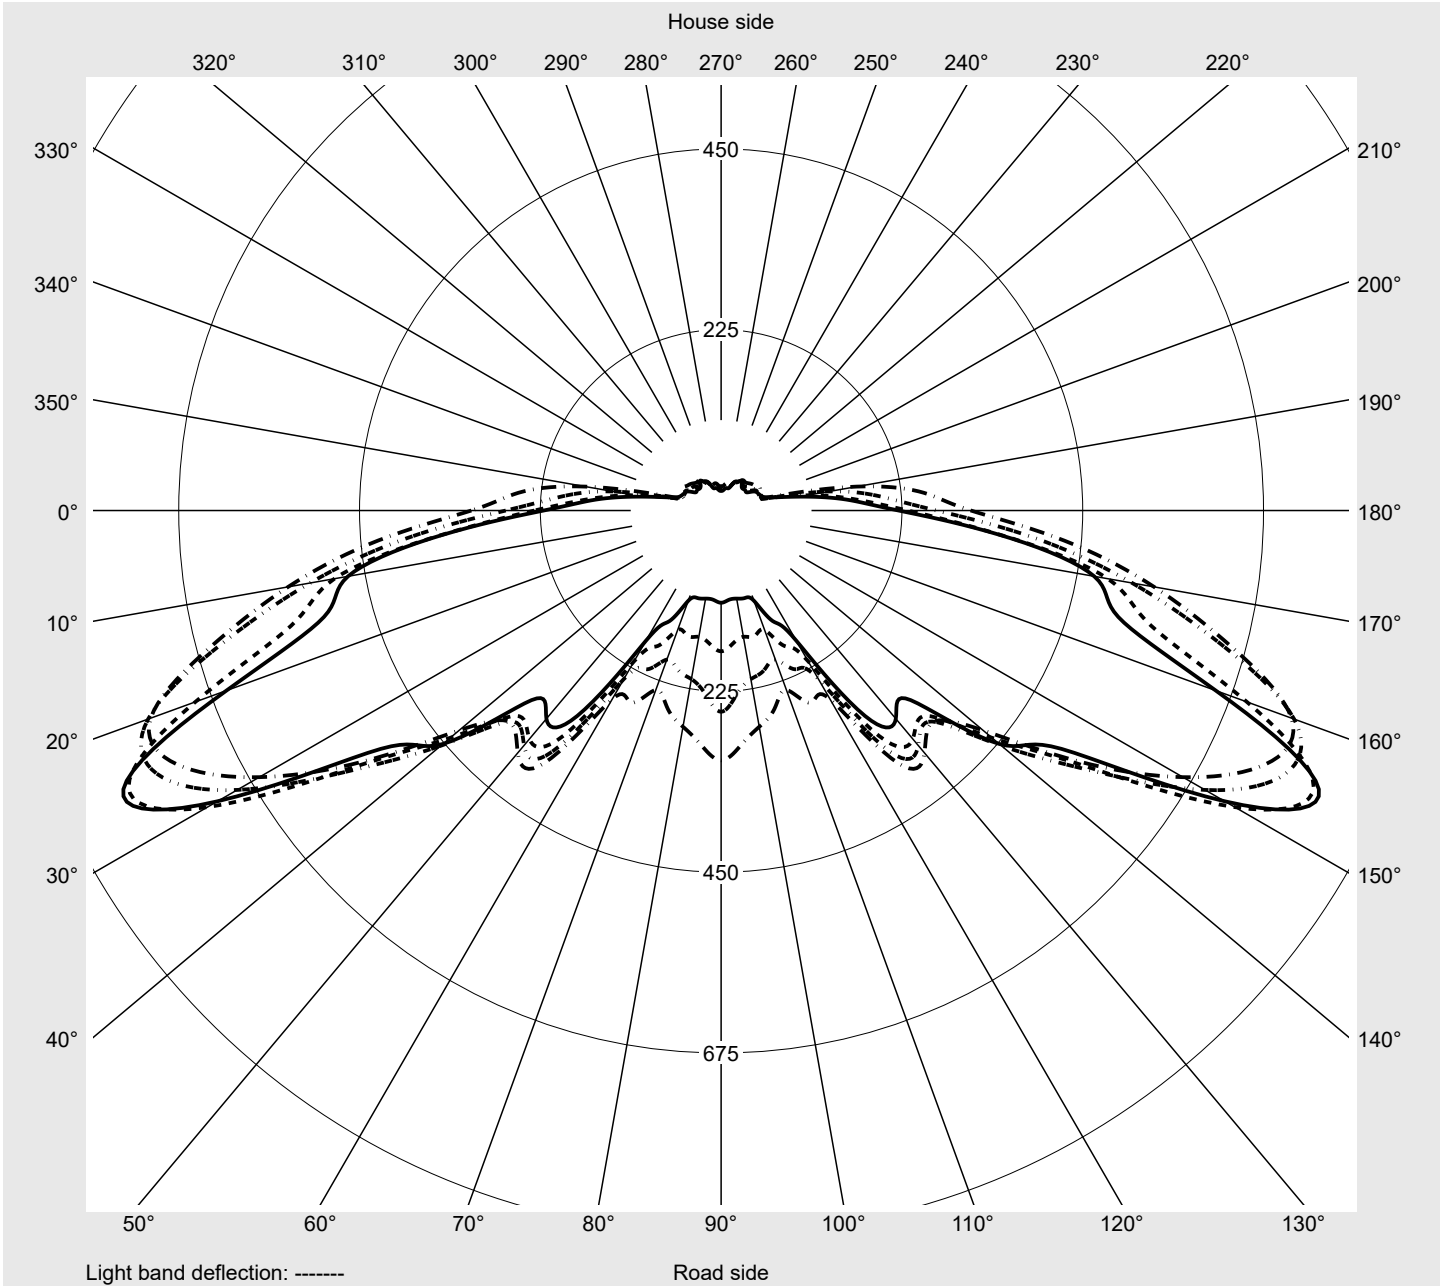

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275KF14HP EAN: 4058352835272	LP number 58710_19
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3
2,5°	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.5	8.3	8.7	8.7	8.7
5,0°	9.1	9.3	9.6	10.0	10.2	10.2	10.0	10.0	10.4	10.9	11.5	12.2	12.6
7,5°	17.2	17.8	17.0	15.4	13.9	12.6	11.7	12.0	12.8	14.1	16.1	18.0	19.3
10,0°	36.3	35.0	33.0	31.5	28.5	24.3	20.4	21.1	26.1	30.0	33.9	33.7	31.7
12,5°	50.9	59.1	52.6	50.9	51.1	51.7	53.7	53.7	54.3	53.9	55.6	52.2	50.0
15,0°	68.5	60.0	65.9	75.0	74.8	66.7	54.8	53.7	57.6	63.7	76.1	75.6	78.5
17,5°	93.9	100.4	103.7	98.9	101.1	86.1	92.4	102.6	84.6	111.5	101.1	94.6	100.4
20,0°	117.6	135.6	145.6	141.1	137.4	117.2	117.2	110.2	92.8	107.4	130.0	144.3	142.2
22,5°	140.0	151.3	166.3	169.8	182.6	163.9	142.4	144.1	107.2	130.0	140.4	147.4	153.2
25,0°	153.2	172.8	162.8	175.2	172.4	173.7	174.6	170.0	125.0	141.7	148.2	158.2	175.9
27,5°	167.4	187.8	198.9	195.4	196.5	185.9	185.6	192.2	158.2	179.3	171.3	166.7	185.4
30,0°	194.5	218.9	235.6	232.4	220.9	204.5	205.6	198.5	166.3	208.2	195.9	184.8	204.5
32,5°	212.8	221.7	231.1	245.0	246.3	242.2	241.7	220.6	171.1	221.9	245.0	223.0	218.7
35,0°	232.6	258.0	260.6	255.6	259.3	253.0	273.0	244.1	190.4	245.2	254.5	264.1	252.2
37,5°	268.2	293.0	298.0	282.8	290.0	270.4	281.5	276.5	224.1	272.4	275.4	301.1	278.0
40,0°	285.2	291.3	306.9	307.6	316.7	314.1	326.5	289.8	234.5	314.3	300.4	305.8	295.4
42,5°	307.8	300.0	319.1	326.1	325.2	333.7	368.9	328.0	247.8	331.5	328.5	317.4	304.3
45,0°	316.1	320.8	353.0	367.8	360.6	352.1	386.7	359.3	281.7	343.7	354.3	339.1	310.0
47,5°	328.0	340.4	402.1	427.4	413.4	395.8	420.2	388.4	314.1	356.1	369.5	363.7	313.5
50,0°	325.0	367.1	451.9	470.0	478.0	444.5	491.0	433.4	323.2	361.9	388.4	376.3	313.2
52,5°	335.2	371.7	460.0	505.4	543.0	533.9	543.9	481.5	351.3	370.0	393.9	394.1	308.5
55,0°	343.7	396.9	473.4	555.8	606.3	619.3	591.9	505.8	375.8	372.4	399.3	404.1	306.7
57,5°	349.3	426.5	520.0	614.7	703.2	688.4	643.9	520.2	404.7	375.2	396.9	401.5	297.4
60,0°	310.8	428.4	547.1	658.6	755.4	747.3	663.6	545.0	425.6	372.4	393.7	383.7	271.1
62,5°	268.0	391.7	519.5	644.7	758.8	774.9	695.4	565.2	455.4	371.3	381.5	366.3	242.2
65,0°	232.4	349.5	488.7	554.1	696.2	813.6	738.2	555.6	440.0	361.3	371.1	342.1	216.5
67,5°	220.9	348.2	471.5	511.7	655.2	820.8	723.6	517.1	451.9	333.7	338.2	311.9	186.9
70,0°	248.5	366.7	464.7	511.5	618.6	735.4	656.7	474.5	396.7	298.5	309.1	281.1	156.9
72,5°	261.9	374.1	438.7	498.9	601.0	654.1	595.6	413.4	333.2	233.9	238.5	225.4	128.0
75,0°	205.2	325.2	385.0	425.0	508.0	508.0	465.6	296.1	222.8	151.5	194.8	204.3	113.7
77,5°	158.7	226.3	250.0	286.1	318.2	293.7	264.8	175.9	124.6	98.7	146.9	165.2	98.9
80,0°	83.5	95.2	118.5	151.9	144.1	133.7	140.6	108.5	85.4	57.8	59.6	68.0	46.5
82,5°	50.4	57.2	62.8	88.0	72.8	55.2	73.3	67.2	60.0	39.3	28.7	22.8	18.0
85,0°	25.0	26.5	28.9	33.5	26.7	28.7	35.4	32.4	27.6	19.3	12.4	13.7	12.6
87,5°	19.3	18.0	18.9	19.3	18.3	19.1	21.1	17.8	15.4	11.7	9.8	11.3	11.3
90,0°	14.1	13.5	14.3	14.1	13.7	12.8	12.4	11.3	10.0	8.9	7.8	9.8	10.0
92,5°	12.6	12.2	12.6	12.6	12.0	11.5	11.1	10.2	9.1	8.0	7.2	9.1	9.3
95,0°	10.7	10.4	10.9	10.7	10.2	9.8	9.6	8.9	8.3	7.4	6.7	8.0	8.5
97,5°	9.3	9.3	9.8	9.8	9.3	8.9	8.5	8.3	7.4	6.7	6.5	7.4	8.0
100,0°	8.7	8.5	8.9	8.7	8.3	8.0	7.8	7.4	7.0	6.5	6.3	7.0	7.4
102,5°	7.8	8.0	8.0	8.0	7.6	7.6	7.4	7.0	6.5	6.1	5.9	6.5	7.0
105,0°	7.4	7.2	7.6	7.4	7.2	7.0	6.7	6.5	6.1	6.1	5.7	6.3	6.7
107,5°	6.7	7.0	7.2	7.0	6.7	6.5	6.3	6.1	5.9	5.7	5.7	6.1	6.5
110,0°	6.3	6.3	6.5	6.5	6.3	6.1	5.9	5.7	5.7	5.7	5.4	5.7	6.1
112,5°	6.1	6.1	6.3	6.3	5.9	5.7	5.7	5.4	5.4	5.2	5.2	5.7	5.7

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275KF14HP EAN: 4058352835272	LP number 58710_19
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3
2,5°	8.7	8.9	8.9	9.1	9.1	9.1	8.0	8.0	8.0	8.0	8.0	8.0	8.0
5,0°	13.0	13.5	13.7	13.9	13.9	14.3	9.1	9.1	8.9	8.9	8.7	8.7	8.7
7,5°	20.9	23.0	23.9	26.5	30.0	30.0	16.5	15.2	13.7	12.8	12.6	12.4	12.2
10,0°	34.3	36.5	33.3	34.1	37.0	37.8	38.7	39.3	40.6	38.3	33.5	34.1	30.2
12,5°	50.6	51.3	61.1	64.3	62.4	60.4	53.0	43.7	37.2	37.2	39.8	47.8	49.6
15,0°	80.2	84.1	88.7	89.8	88.9	85.6	80.6	78.7	67.4	60.2	71.1	69.3	63.3
17,5°	101.1	112.8	118.5	139.1	154.6	156.5	91.3	96.3	73.7	64.6	70.9	73.3	66.1
20,0°	133.0	137.6	156.7	172.2	178.0	185.6	123.3	130.2	97.6	71.7	76.1	83.3	73.7
22,5°	161.9	162.2	191.1	197.4	215.4	219.5	131.3	127.2	99.6	85.0	96.3	81.5	79.8
25,0°	189.8	183.0	216.1	227.6	240.0	239.1	152.2	127.2	104.1	84.8	100.2	87.2	72.6
27,5°	217.6	200.2	250.0	265.0	285.4	309.1	166.3	147.2	98.9	83.7	110.6	91.1	71.3
30,0°	248.5	240.6	281.3	283.7	291.1	309.5	188.2	163.9	108.0	81.7	107.2	86.3	64.6
32,5°	264.1	255.8	312.1	309.1	331.3	359.1	198.2	171.1	100.9	83.3	109.6	86.3	66.1
35,0°	295.8	285.4	330.4	329.8	344.5	377.4	224.8	189.1	107.4	88.7	105.0	80.6	68.9
37,5°	310.4	299.5	341.1	341.3	354.8	381.3	246.3	208.5	110.0	90.6	103.0	74.6	71.5
40,0°	328.9	310.8	350.0	352.4	362.4	391.7	261.5	219.1	119.6	92.8	89.3	70.4	73.3
42,5°	353.0	318.5	356.7	363.9	374.3	400.0	294.5	230.6	124.6	91.9	82.2	72.6	76.7
45,0°	364.1	324.1	366.5	372.8	380.0	407.8	319.3	246.9	128.0	86.5	71.5	74.6	78.3
47,5°	366.9	323.2	367.8	374.1	380.8	403.4	323.7	246.1	125.9	76.5	65.0	71.7	75.4
50,0°	355.2	316.1	362.6	372.4	379.8	400.4	324.5	241.9	124.1	67.0	61.1	67.6	69.8
52,5°	339.1	300.2	351.3	364.1	373.2	392.6	323.2	238.0	116.1	58.0	58.0	63.5	65.0
55,0°	318.5	283.0	331.1	345.2	359.5	377.8	327.1	235.4	106.5	57.2	56.1	60.9	60.4
57,5°	293.2	264.3	299.1	316.3	334.1	354.8	304.3	207.8	84.6	55.2	54.8	57.8	56.3
60,0°	263.7	237.6	255.8	273.2	292.1	310.8	253.2	171.5	68.5	53.0	51.5	55.6	53.0
62,5°	218.0	197.4	205.9	213.0	228.9	250.4	199.5	136.7	58.3	50.6	49.3	51.5	47.2
65,0°	185.9	158.0	161.5	159.6	166.3	175.2	164.8	109.1	59.3	50.6	49.8	50.0	43.0
67,5°	151.7	119.6	112.8	111.3	111.5	114.8	156.5	99.3	62.8	53.3	50.6	47.4	39.3
70,0°	125.4	96.7	72.8	69.6	68.9	74.3	171.3	104.3	66.1	52.2	49.3	45.4	37.0
72,5°	93.0	75.9	49.6	43.7	41.1	43.5	166.9	103.0	63.0	51.5	51.5	45.4	34.1
75,0°	71.1	48.7	35.2	29.8	26.7	27.4	109.1	79.6	57.8	47.8	49.6	45.0	32.8
77,5°	52.0	31.1	25.4	22.2	20.4	20.9	86.5	63.0	52.0	45.0	44.6	40.6	31.3
80,0°	27.0	18.9	17.8	17.0	16.5	16.5	59.3	51.7	45.0	40.4	38.0	34.8	28.3
82,5°	15.7	14.1	13.7	13.5	13.0	13.0	39.8	38.9	37.4	33.9	32.6	30.2	24.8
85,0°	12.2	12.0	12.0	11.7	11.3	11.7	24.3	27.0	30.4	31.1	28.5	25.9	22.0
87,5°	11.1	11.1	11.1	10.9	10.4	10.4	20.2	22.6	23.9	23.0	21.7	20.9	18.7
90,0°	10.0	10.0	10.0	10.0	9.1	9.1	14.3	14.8	15.0	14.8	14.6	14.6	13.7
92,5°	9.3	9.3	9.6	9.1	8.9	8.7	12.6	13.0	13.0	13.0	12.8	12.8	12.2
95,0°	8.7	8.7	8.7	8.7	8.3	8.3	10.7	11.1	11.1	10.7	10.7	10.2	9.8
97,5°	8.3	8.3	8.3	8.3	8.0	7.8	9.3	9.6	9.3	9.3	8.9	8.9	8.5
100,0°	7.6	7.8	7.8	7.8	7.8	7.8	8.5	8.5	8.5	8.3	7.8	7.6	7.2
102,5°	7.4	7.4	7.4	7.4	7.4	7.4	7.8	7.8	7.6	7.4	7.2	7.0	6.5
105,0°	7.0	7.0	7.2	7.0	7.0	7.0	7.2	7.2	7.0	6.7	6.5	6.1	5.9
107,5°	6.5	7.0	7.0	7.0	7.0	6.5	6.7	6.7	6.5	6.3	6.1	5.7	5.4
110,0°	6.3	6.5	6.5	7.0	6.5	5.7	6.3	6.1	6.1	5.9	5.7	5.4	5.2
112,5°	6.1	6.1	6.5	6.5	5.9	3.9	5.9	5.9	5.7	5.4	5.2	5.2	4.8

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275KF14HP EAN: 4058352835272	LP number 58710_19
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	0.0	0.0
2,5°	8.3	8.3	8.3	8.5	8.5	8.5	8.7	8.5	8.5	8.5	8.7	0.1	0.1
5,0°	8.7	8.9	8.9	8.9	8.9	9.1	9.1	9.1	8.9	8.9	8.7	0.2	0.4
7,5°	11.3	11.3	11.3	11.5	10.9	10.9	10.9	10.9	10.7	10.7	10.4	0.5	0.9
10,0°	25.2	20.4	18.3	16.7	19.1	21.3	21.7	21.3	20.4	20.7	21.3	1.4	2.3
12,5°	41.5	27.6	17.4	17.8	23.5	28.0	30.7	30.2	31.7	34.8	36.1	2.7	5.0
15,0°	60.6	48.9	37.4	38.9	42.4	40.2	38.9	37.8	39.1	40.6	43.5	4.5	9.5
17,5°	63.9	50.4	33.3	34.3	44.3	48.3	43.5	43.7	44.3	45.4	45.6	6.8	16.3
20,0°	63.0	50.2	41.3	43.0	48.0	45.6	38.7	38.9	43.5	45.0	45.2	9.5	25.8
22,5°	63.5	44.1	38.7	40.9	44.6	43.5	38.7	37.6	40.6	41.7	42.6	12.0	37.8
25,0°	55.9	40.6	36.5	38.5	41.7	40.4	36.7	35.6	38.9	40.4	41.3	14.3	52.1
27,5°	52.0	40.0	36.5	37.2	39.3	39.1	38.3	37.0	37.6	36.7	37.4	17.3	69.4
30,0°	50.0	42.4	38.7	38.3	38.5	36.5	35.0	35.6	35.6	34.6	34.3	20.5	89.9
32,5°	55.9	46.5	38.3	37.6	38.7	38.7	36.1	35.9	33.3	32.6	32.2	23.8	113.7
35,0°	65.9	54.6	46.5	44.1	43.3	40.2	34.8	35.6	32.0	30.9	30.0	27.6	141.3
37,5°	70.2	58.9	51.1	48.9	45.4	40.2	35.2	37.6	34.6	32.8	31.7	31.6	172.9
40,0°	70.4	58.9	51.3	49.1	45.2	40.4	37.2	40.9	38.7	37.0	36.1	35.3	208.2
42,5°	72.8	59.8	52.4	49.8	45.2	41.1	37.0	40.9	39.1	37.8	37.0	39.0	247.1
45,0°	74.1	61.5	54.3	50.9	44.8	42.4	38.0	41.3	39.1	37.4	36.5	42.9	290.0
47,5°	72.6	60.4	53.9	52.0	44.1	43.5	38.9	41.5	39.1	37.4	36.5	46.8	336.8
50,0°	67.6	58.3	52.4	50.6	42.8	43.0	40.0	41.7	39.8	37.4	37.0	50.5	387.3
52,5°	64.3	56.1	51.1	50.0	42.2	42.0	38.7	40.4	38.9	36.1	35.6	53.9	441.2
55,0°	59.8	53.7	49.8	48.7	41.3	40.2	37.6	38.3	38.0	35.2	34.3	57.0	498.2
57,5°	55.9	51.3	47.6	46.5	40.6	38.9	35.0	36.3	35.9	32.6	32.2	59.6	557.8
60,0°	50.9	48.0	46.3	46.1	39.8	37.6	33.5	34.3	34.1	30.9	30.4	60.0	617.9
62,5°	45.6	42.6	42.2	45.4	40.6	37.8	31.3	32.4	31.7	28.3	28.3	58.1	676.0
65,0°	42.0	40.4	40.2	45.2	42.2	38.7	31.5	30.4	29.8	26.7	26.1	55.1	731.1
67,5°	39.1	38.3	39.8	44.1	41.7	39.1	30.4	28.9	27.6	25.0	24.3	52.3	783.4
70,0°	35.4	34.3	38.0	43.0	40.6	35.2	29.8	27.0	25.7	23.5	22.6	49.1	832.5
72,5°	30.4	32.0	34.6	39.6	38.9	31.7	28.5	25.7	23.5	21.5	20.9	44.7	877.2
75,0°	28.3	28.7	29.1	32.8	31.3	27.6	25.0	24.1	21.5	19.3	18.3	36.3	913.4
77,5°	24.8	23.9	24.8	26.7	24.3	22.0	20.9	20.7	19.3	17.4	16.5	25.0	938.4
80,0°	21.3	18.0	18.7	21.7	21.3	20.2	19.3	18.7	17.2	15.9	14.3	14.2	952.7
82,5°	17.8	15.0	16.3	19.1	18.7	18.9	18.3	17.6	16.1	14.8	13.0	9.0	961.6
85,0°	15.2	12.2	13.7	16.7	16.7	17.4	16.5	16.3	15.2	13.7	11.7	5.6	967.2
87,5°	13.3	10.4	12.2	15.2	15.2	15.4	15.2	15.2	14.1	13.0	11.3	4.3	971.5
90,0°	10.0	8.3	10.2	13.5	13.9	13.9	13.9	13.9	13.3	12.2	10.4	3.3	974.9
92,5°	9.1	7.4	9.1	11.7	12.2	12.0	12.0	12.2	11.3	10.7	9.1	3.0	977.8
95,0°	7.8	6.5	7.4	9.1	9.6	9.6	9.6	9.6	9.1	8.5	7.4	2.5	980.3
97,5°	6.7	6.1	6.3	7.6	7.8	7.8	7.8	7.8	7.4	7.0	6.1	2.2	982.6
100,0°	6.3	5.7	5.4	6.3	6.7	6.5	6.5	6.5	6.3	6.1	5.7	2.0	984.5
102,5°	5.7	5.2	5.0	5.7	6.1	6.1	5.9	5.9	5.7	5.2	5.2	1.8	986.4
105,0°	5.4	5.0	4.8	5.2	5.2	5.2	5.2	5.2	5.2	4.8	4.3	1.7	988.0
107,5°	5.2	4.8	4.6	4.8	4.8	4.8	4.8	4.8	4.8	4.3	3.9	1.6	989.6
110,0°	4.8	4.6	4.3	4.3	4.3	4.3	4.3	4.6	4.3	4.1	3.5	1.4	991.0
112,5°	4.8	4.3	4.3	4.1	4.3	4.1	4.3	4.3	4.3	3.5	2.6	1.3	992.3

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275KF14HP EAN: 4058352835272	LP number 58710_19
--------------------------------------	---	------------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
---	-----------------------------------	---------------

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	5.9	5.9	5.9	5.9	5.7	5.4	5.4	5.2	5.2	5.2	5.2	5.4	5.7
117,5°	5.4	5.7	5.7	5.7	5.4	5.2	5.2	5.0	5.0	5.0	5.2	5.2	5.4
120,0°	5.2	5.2	5.4	5.2	5.0	5.0	4.8	4.8	4.8	4.8	4.8	5.0	5.2
122,5°	4.8	4.8	5.0	5.0	4.6	4.3	4.3	4.3	4.3	4.6	4.3	4.6	4.8
125,0°	4.3	4.3	4.6	4.3	3.7	3.5	3.7	3.7	3.7	3.7	3.7	3.7	3.7
127,5°	2.8	2.8	2.8	2.8	2.8	2.8	2.4	2.4	2.4	2.4	2.4	2.4	2.6
130,0°	2.2	2.2	2.2	2.2	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
132,5°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.5	1.5	1.5	1.5	1.3
135,0°	1.7	1.7	1.7	1.7	1.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
137,5°	1.3	1.5	1.5	1.3	1.3	1.3	1.3	1.3	1.3	1.1	0.9	0.9	0.9
140,0°	1.3	1.3	1.1	1.1	1.1	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
142,5°	1.1	1.1	1.1	0.9	0.9	0.9	0.9	0.9	0.9	0.7	0.7	0.4	0.4
145,0°	1.1	1.1	1.1	0.9	0.9	0.9	0.9	0.9	0.7	0.7	0.7	0.7	0.4
147,5°	1.1	1.1	1.1	0.9	0.9	0.9	0.9	0.9	0.9	0.7	0.4	0.4	0.4
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275KF14HP EAN: 4058352835272	LP number 58710_19
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	5.7	6.1	6.1	6.3	5.0	2.2	5.7	5.7	5.4	5.2	5.2	4.8	4.8
117,5°	5.7	5.7	6.1	6.1	4.6	2.2	5.4	5.2	5.2	5.0	4.8	4.8	4.3
120,0°	5.2	5.7	5.7	5.7	4.1	2.2	5.2	5.0	4.8	4.8	4.6	4.3	4.3
122,5°	4.8	4.8	5.2	5.2	3.5	1.7	4.6	4.6	4.3	4.3	4.3	3.9	3.9
125,0°	3.9	3.9	3.9	3.9	2.6	1.7	3.9	3.7	3.7	3.7	3.5	3.5	3.5
127,5°	2.6	2.6	2.6	2.6	1.7	1.3	2.8	2.8	2.8	2.8	2.8	2.8	2.8
130,0°	1.7	1.7	1.7	1.7	1.3	0.9	2.2	2.2	2.2	2.2	2.2	2.2	2.2
132,5°	1.5	1.5	1.7	1.3	1.1	0.9	1.7	1.7	1.7	1.7	1.7	1.7	1.7
135,0°	1.3	1.3	1.3	1.3	0.9	0.9	2.0	2.0	1.7	1.7	1.7	1.7	1.7
137,5°	0.9	0.9	0.9	0.9	0.9	0.9	1.5	1.7	1.7	1.7	1.7	1.7	1.7
140,0°	0.9	0.9	0.9	0.9	0.4	0.4	1.3	1.3	1.3	1.3	1.3	1.3	1.3
142,5°	0.4	0.4	0.4	0.4	0.4	0.4	1.3	1.3	1.3	1.3	1.3	1.3	1.3
145,0°	0.4	0.4	0.4	0.4	0.4	0.4	1.1	1.3	1.3	1.3	1.3	1.3	1.3
147,5°	0.4	0.4	0.4	0.4	0.4	0.4	1.1	1.1	1.1	1.1	1.1	1.1	1.1
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	4.3	4.3	4.1	3.9	3.9	3.9	3.9	3.9	3.9	3.3	2.2	1.2	993.6
117,5°	4.3	4.1	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.0	2.2	1.2	994.8
120,0°	4.3	3.9	3.9	3.9	3.5	3.5	3.5	3.7	3.5	2.8	2.2	1.1	995.8
122,5°	3.9	3.7	3.7	3.5	3.5	3.3	3.3	3.5	3.5	2.6	2.2	1.0	996.8
125,0°	3.3	3.3	3.0	3.0	2.8	2.6	2.6	2.6	2.6	2.2	1.7	0.8	997.6
127,5°	2.6	2.6	2.6	2.4	2.4	2.2	2.2	2.2	2.2	1.7	1.7	0.5	998.1
130,0°	2.2	2.2	2.2	2.2	2.2	1.7	1.7	1.7	1.7	1.7	1.3	0.4	998.5
132,5°	2.0	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.5	1.3	1.3	0.3	998.8
135,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.5	1.3	1.3	1.3	0.3	999.1
137,5°	1.7	1.7	1.7	1.7	1.5	1.3	1.3	1.3	1.3	1.3	1.3	0.2	999.4
140,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.1	1.3	1.1	0.9	0.9	0.2	999.6
142,5°	1.3	1.3	1.3	1.3	1.3	1.1	1.1	0.9	0.9	0.9	0.9	0.2	999.7
145,0°	1.3	1.3	1.3	1.3	1.3	1.1	1.1	0.9	0.9	0.9	0.9	0.1	999.9
147,5°	1.3	1.1	0.9	1.1	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.1	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275KF14HP EAN: 4058352835272	LP number 58710_19
---	---	-------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4710	33.6	35.9	34.8
95	241	252	4469	31.4	33.5	32.4
90	229	250	4246	29.4	31.4	30.4
85	216	248	4005	27.4	29.2	28.3
80	203	246	3764	25.5	27.1	26.3
75	190	243	3523	23.6	25.2	24.4
70	178	241	3301	21.9	23.3	22.6
65	165	238	3060	20.2	21.5	20.8
60	152	235	2819	18.5	19.6	19.0
55	140	232	2596	16.9	18.0	17.4
50	127	229	2355	15.3	16.2	15.8
45	114	225	2114	13.7	14.5	14.1
40	102	221	1891	12.3	13.0	12.6
35	89	216	1650	10.8	11.4	11.1
30	76	210	1409	9.3	9.8	9.6
25	63	203	1168	7.8	8.2	8.0
20	51	195	946	6.6	6.9	6.8
15	38	184	705	5.2	5.5	5.4
11	28	173	519	4.1	4.4	4.2