




Photometric test report

| | | |
|--|---|--|
| Family Silica® 21 | Order number: 51MX23TAT4W EAN: 4058352683798 | LP number 59330_99 |
|  | Version | surface-mounted luminaire, with homogeneous illumination, prismatic cover, direct distribution, extremely wide distribution, UGR≤19 (L65≤3000cd/m²), tunable white |
| | Lamps | LED 2700 K CRI ≥ 80 |
| | Controlgear | ECG-DALI |
| | Setting | individual position |
| | Rated values | Net luminous flux = 3230 lm Power consumption = 36.9 W Luminous efficacy = 87.5 lm/W |
| | | serial documentation 03.05.2023 |
| | |  |

Luminous intensity in cd/klm C180-0 C270-90 Imax: 642 cd/klm

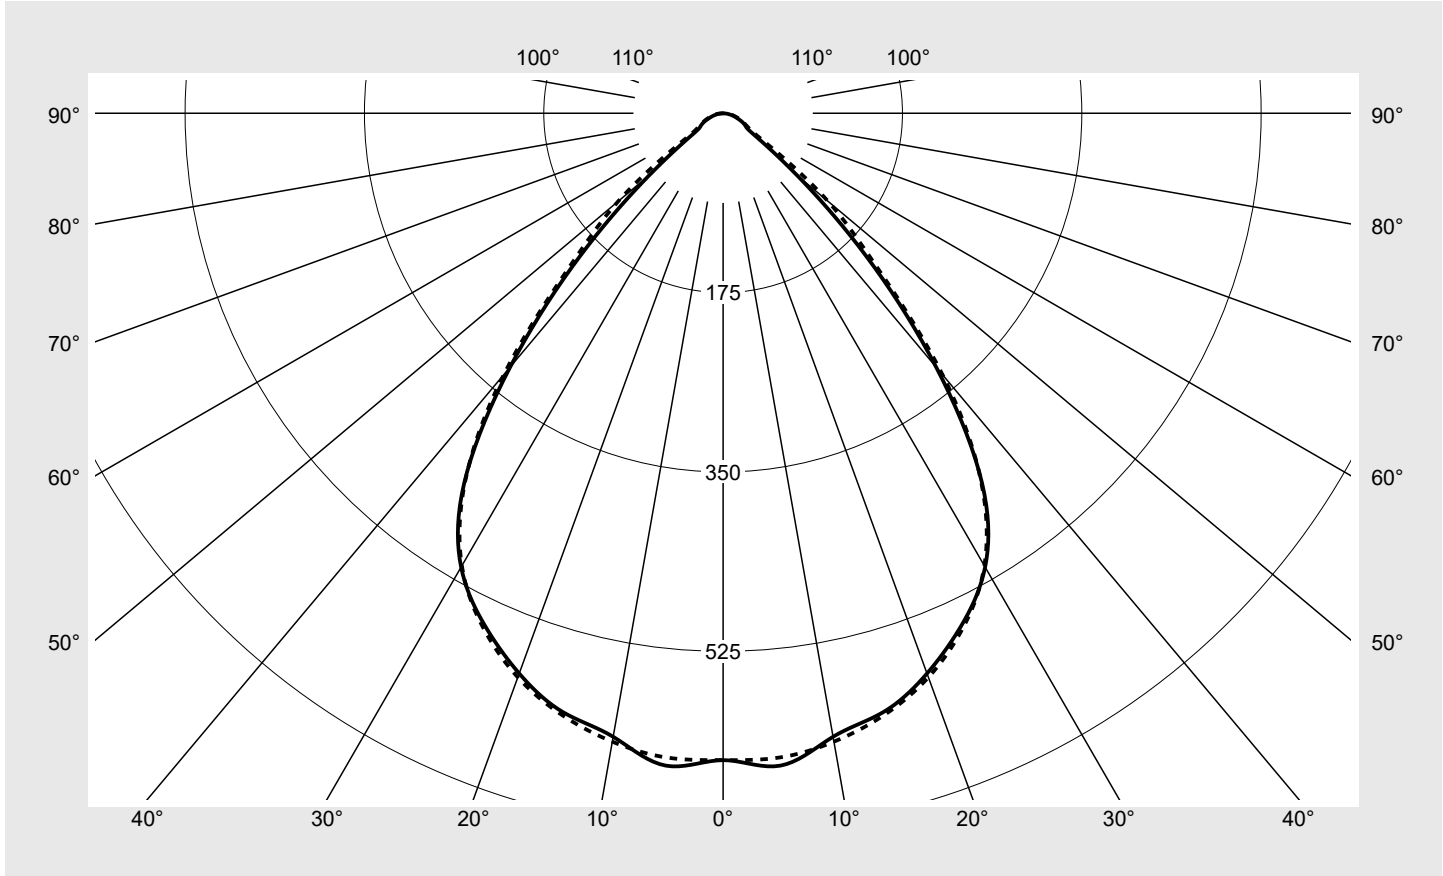

| Classifications | |
|-----------------|------------------------------------|
| DIN 5040 | A 6 0 |
| CIE | N1=78 N2=96 N3=99 N4=100 N5=100 |

| Luminaire light output ratios | |
|-------------------------------|--------|
| η_{LB} | 100.0% |
| ϕ_u | 100.0% |
| ϕ_o | 0.0% |

| Measurement conditions |
|---------------------------|
| DIN EN 13032 and DIN 5032 |

Photometric test report

| | | |
|--|---|------------------------------|
| Family Silica® 21 | Order number: 51MX23TAT4W EAN: 4058352683798 | LP number 59330_99 |
| Table of values for luminous intensities | | Maximum luminous intensity |
| | | siteco |

| C-planes γ | 0° 180° | 15° | 30° | 45° | 60° | 75° | 90° 270° | Phi-zone | Total Phi-zone |
|------------------------------|------------|----------------------|----------------------|----------------------|----------------------|----------------------|-------------|-------------------------|-------------------|
| | | 165° 195° 345° | 150° 210° 330° | 135° 225° 315° | 120° 240° 300° | 105° 255° 285° | | | |
| Luminous intensity in cd/klm | | | | | | | | Luminous flux in lm/klm | |
| 0° | 631.2 | 631.2 | 631.2 | 631.2 | 631.2 | 631.2 | 631.2 | 3.8 | 3.8 |
| 5° | 639.0 | 636.9 | 635.8 | 640.8 | 642.0 | 634.8 | 631.1 | 30.5 | 34.2 |
| 10° | 617.8 | 615.8 | 612.2 | 616.7 | 624.6 | 629.4 | 622.7 | 59.0 | 93.2 |
| 15° | 604.8 | 603.1 | 597.6 | 597.0 | 601.6 | 607.9 | 607.8 | 85.4 | 178.7 |
| 20° | 581.7 | 581.2 | 575.6 | 575.6 | 576.2 | 579.7 | 585.7 | 108.5 | 287.2 |
| 25° | 550.9 | 551.4 | 546.3 | 545.8 | 546.2 | 547.0 | 553.9 | 127.0 | 414.1 |
| 30° | 511.3 | 512.1 | 506.5 | 506.8 | 506.5 | 506.0 | 509.9 | 139.2 | 553.4 |
| 35° | 440.5 | 440.8 | 437.0 | 438.8 | 441.2 | 438.6 | 439.0 | 138.1 | 691.5 |
| 40° | 323.4 | 324.8 | 326.1 | 329.4 | 332.6 | 332.8 | 333.0 | 115.9 | 807.4 |
| 45° | 198.4 | 199.0 | 200.7 | 203.5 | 206.3 | 209.2 | 212.1 | 79.1 | 886.5 |
| 50° | 93.9 | 108.5 | 122.0 | 111.2 | 100.2 | 119.3 | 133.6 | 47.2 | 933.7 |
| 55° | 37.7 | 51.0 | 48.2 | 55.0 | 41.5 | 57.5 | 53.4 | 22.4 | 956.1 |
| 60° | 25.5 | 26.5 | 28.2 | 26.2 | 26.1 | 27.8 | 29.0 | 12.8 | 968.9 |
| 65° | 21.0 | 20.8 | 21.7 | 21.1 | 22.1 | 22.0 | 22.3 | 10.7 | 979.6 |
| 70° | 15.2 | 15.5 | 16.2 | 16.1 | 16.4 | 16.6 | 17.4 | 8.3 | 987.9 |
| 75° | 10.6 | 11.0 | 12.1 | 11.5 | 11.8 | 12.4 | 12.4 | 6.2 | 994.1 |
| 80° | 6.4 | 6.8 | 7.5 | 8.1 | 7.5 | 8.4 | 8.5 | 4.1 | 998.3 |
| 85° | 2.4 | 2.5 | 2.6 | 3.2 | 3.5 | 4.1 | 4.3 | 1.7 | 1000.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |

Photometric test report

| | | |
|-----------------------------|---|------------------------------|
| Family Silica® 21 | Order number: 51MX23TAT4W EAN: 4058352683798 | LP number 59330_99 |
|-----------------------------|---|------------------------------|

| | | | | | | | | | | |
|-----------|---------------|--------|--|--|--|--|--|--|--|--|
| UGR-Table | Standard room | siteco | | | | | | | | |
|-----------|---------------|--------|--|--|--|--|--|--|--|--|

| | | | | | | | | | | | |
|------------------------------|---------------------|------|------|------|------|--------------------|------|------|------|------|------|
| Reflection factor of ceiling | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | |
| Reflection factor of walls | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | |
| Reflection factor of floor | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | |
| Room dimensions | View crosswise (C0) | | | | | View endwise (C90) | | | | | |
| x | y | | | | | | | | | | |
| 2H | 2H | 18.4 | 19.7 | 18.7 | 20.1 | 20.4 | 18.6 | 20.0 | 18.9 | 20.3 | 20.6 |
| | 3H | 18.4 | 19.7 | 18.8 | 20.0 | 20.3 | 18.7 | 19.9 | 19.1 | 20.2 | 20.6 |
| | 4H | 18.5 | 19.6 | 18.9 | 20.0 | 20.3 | 18.7 | 19.9 | 19.1 | 20.2 | 20.6 |
| | 6H | 18.5 | 19.5 | 18.9 | 19.9 | 20.3 | 18.8 | 19.8 | 19.2 | 20.2 | 20.6 |
| | 8H | 18.6 | 19.5 | 19.0 | 19.9 | 20.3 | 18.9 | 19.8 | 19.3 | 20.2 | 20.6 |
| | 12H | 18.6 | 19.4 | 19.0 | 19.8 | 20.2 | 18.9 | 19.8 | 19.4 | 20.2 | 20.6 |
| 4H | 2H | 18.3 | 19.4 | 18.7 | 19.8 | 20.1 | 18.5 | 19.6 | 18.9 | 20.0 | 20.4 |
| | 3H | 18.4 | 19.4 | 18.9 | 19.8 | 20.2 | 18.7 | 19.6 | 19.1 | 20.0 | 20.4 |
| | 4H | 18.5 | 19.4 | 19.0 | 19.8 | 20.2 | 18.8 | 19.6 | 19.2 | 20.0 | 20.5 |
| | 6H | 18.6 | 19.3 | 19.1 | 19.8 | 20.2 | 18.9 | 19.6 | 19.4 | 20.1 | 20.5 |
| | 8H | 18.6 | 19.3 | 19.1 | 19.7 | 20.2 | 19.0 | 19.6 | 19.5 | 20.1 | 20.6 |
| | 12H | 18.7 | 19.2 | 19.2 | 19.7 | 20.2 | 19.1 | 19.6 | 19.6 | 20.1 | 20.6 |
| 8H | 4H | 18.5 | 19.2 | 19.0 | 19.6 | 20.1 | 18.8 | 19.4 | 19.3 | 19.9 | 20.3 |
| | 6H | 18.7 | 19.2 | 19.2 | 19.7 | 20.2 | 19.0 | 19.5 | 19.5 | 20.0 | 20.5 |
| | 8H | 18.7 | 19.2 | 19.2 | 19.7 | 20.2 | 19.1 | 19.5 | 19.6 | 20.0 | 20.5 |
| | 12H | 18.7 | 19.1 | 19.3 | 19.6 | 20.2 | 19.2 | 19.5 | 19.7 | 20.0 | 20.6 |
| 12H | 4H | 18.5 | 19.1 | 19.0 | 19.5 | 20.0 | 18.8 | 19.3 | 19.3 | 19.8 | 20.3 |
| | 6H | 18.7 | 19.1 | 19.2 | 19.6 | 20.1 | 19.0 | 19.4 | 19.5 | 19.9 | 20.4 |
| | 8H | 18.7 | 19.1 | 19.3 | 19.6 | 20.2 | 19.1 | 19.5 | 19.6 | 20.0 | 20.5 |

| | | | |
|-----------------|---------------------------------|-------------------------------|--------------------|
| Luminance table | Max. for $\gamma \geq 65^\circ$ | Photometric dimensions in mm: | L = 1200 B = 50 |
|-----------------|---------------------------------|-------------------------------|--------------------|

| C-planes | γ | Luminance in cd/m ² | | | | | | | |
|----------|----------|--------------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-------------|--|
| | | 0° 180° | 15° 165° 195° 345° | 30° 150° 210° 330° | 45° 135° 225° 315° | 60° 120° 240° 300° | 75° 105° 255° 285° | 90° 270° | |
| 45° | | 15103.3 | 15152.2 | 15280.3 | 15493.5 | 15704.6 | 15929.7 | 16146.3 | |
| 50° | | 7863.9 | 9084.5 | 10219.2 | 9316.7 | 8395.1 | 9990.0 | 11187.5 | |
| 55° | | 3538.7 | 4785.7 | 4525.4 | 5159.6 | 3891.9 | 5393.0 | 5015.7 | |
| 60° | | 2744.2 | 2856.9 | 3031.1 | 2815.5 | 2807.8 | 2995.8 | 3120.2 | |
| 65° | | 2671.0 | 2653.7 | 2764.5 | 2687.3 | 2814.5 | 2800.8 | 2839.9 | |
| 70° | | 2391.8 | 2442.2 | 2542.1 | 2530.8 | 2576.9 | 2607.1 | 2739.5 | |
| 75° | | 2200.0 | 2280.1 | 2509.9 | 2401.5 | 2455.0 | 2575.0 | 2579.4 | |
| 80° | | 1979.7 | 2103.4 | 2322.3 | 2525.7 | 2337.8 | 2614.0 | 2619.9 | |
| 85° | | 1496.6 | 1518.8 | 1620.1 | 1980.9 | 2135.3 | 2509.6 | 2632.5 | |

Photometric test report

| | | |
|------------------------------------|---|-------------------------------------|
| Family Silica® 21 | Order number: 51MX23TAT4W EAN: 4058352683798 | LP number 59330_99 |
|------------------------------------|---|-------------------------------------|



Luminance values in cd/m²

| | | | | |
|--------------|--------------|--------------|--------------|--------------|
| γ 65° | γ 70° | γ 75° | γ 80° | γ 85° |
|--------------|--------------|--------------|--------------|--------------|

