




Photometric test report

Family Silica® 21 Ring	Order number: 5PJBO2D1104A EAN: 4058352958971	LP number 59505_5
	Version suspended luminaire incl. Pendant, black, outer ring side luminous, cover opal, polycarbonate, frosted, diffuse beam	serial documentation 08.11.2023
	Lamps LED 3000 K CRI ≥ 80	
	Controlgear ECG-DALI	
Rated values Net luminous flux = 4700 lm Power consumption = 80.0 W Luminous efficacy = 58.8 lm/W		

Luminous intensity in cd/klm C180-0 **Imax: 173 cd/klm**

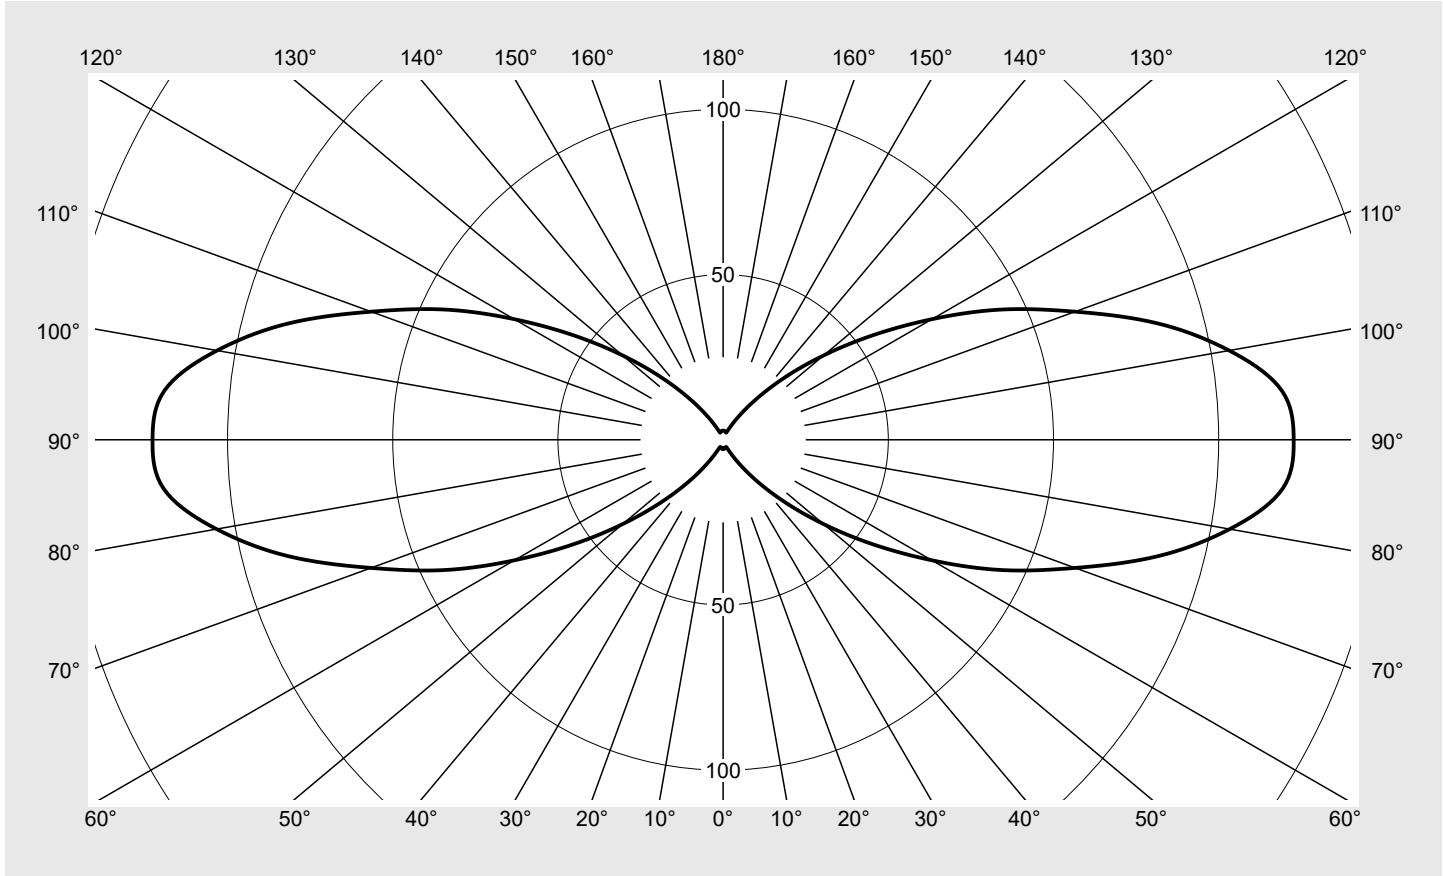

Classifications	
DIN 5040	C 1 1
CIE	N1=2 N2=16 N3=49 N4=50 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	50.0%
ϕ_o	50.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 Ring	Order number: 5PJBO2D1104A EAN: 4058352958971	LP number 59505_5
----------------------------------	--	-----------------------------

Table of values for luminous intensities	Maximum luminous intensity	sITeco
---	-----------------------------------	---------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	2.4	0.0	0.0
5°	2.8	0.1	0.1
10°	2.7	0.3	0.4
15°	2.6	0.4	0.8
20°	2.4	0.4	1.2
25°	2.7	0.6	1.8
30°	5.1	1.4	3.2
35°	10.0	3.1	6.4
40°	17.4	6.1	12.5
45°	27.2	10.5	23.0
50°	39.7	16.7	39.7
55°	55.0	24.7	64.4
60°	72.9	34.6	99.0
65°	93.3	46.4	145.4
70°	113.4	58.4	203.8
75°	136.2	72.1	275.9
80°	155.7	84.0	360.0
85°	170.0	92.8	452.8
90°	172.7	94.7	547.4
95°	169.8	92.7	640.2
100°	155.5	84.0	724.1
105°	136.1	72.1	796.2
110°	113.4	58.4	854.6
115°	93.3	46.4	901.0
120°	73.0	34.7	935.6
125°	55.0	24.7	960.3
130°	39.7	16.7	977.0
135°	27.2	10.5	987.5
140°	17.3	6.1	993.6
145°	10.0	3.1	996.8
150°	5.2	1.4	998.2
155°	2.7	0.6	998.8
160°	2.4	0.4	999.2
165°	2.6	0.4	999.6
170°	2.7	0.3	999.9
175°	2.8	0.1	1000.0
180°	2.6	0.0	1000.0

Photometric test report

Family Silica® 21 Ring	Order number: 5PJBO2D1104A EAN: 4058352958971	LP number 59505_5
----------------------------------	--	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	24.4	25.9	25.1	26.7	27.6	24.4	25.9	25.1	26.7	27.6
	3H	29.1	30.5	29.9	31.3	32.3	29.1	30.5	29.9	31.3	32.3
	4H	31.5	32.8	32.3	33.6	34.7	31.5	32.8	32.3	33.6	34.7
	6H	33.8	35.0	34.6	35.9	36.9	33.8	35.0	34.6	35.9	36.9
	8H	34.8	36.0	35.6	36.8	37.9	34.8	36.0	35.6	36.8	37.9
	12H	35.8	36.9	36.7	37.8	38.9	35.8	36.9	36.7	37.8	38.9
4H	2H	26.0	27.3	26.7	28.1	29.1	26.0	27.3	26.7	28.1	29.1
	3H	30.5	31.6	31.3	32.5	33.5	30.5	31.6	31.3	32.5	33.5
	4H	32.9	33.9	33.7	34.8	35.9	32.9	33.9	33.7	34.8	35.9
	6H	35.2	36.2	36.1	37.1	38.2	35.2	36.2	36.1	37.1	38.2
	8H	36.3	37.2	37.2	38.1	39.3	36.3	37.2	37.2	38.1	39.3
	12H	37.4	38.2	38.3	39.1	40.3	37.4	38.2	38.3	39.1	40.3
8H	4H	33.7	34.5	34.5	35.5	36.6	33.7	34.5	34.5	35.5	36.6
	6H	36.1	36.9	37.0	37.8	39.1	36.1	36.9	37.0	37.8	39.1
	8H	37.4	38.1	38.3	39.0	40.3	37.4	38.1	38.3	39.0	40.3
	12H	38.6	39.2	39.5	40.2	41.5	38.6	39.2	39.5	40.2	41.5
12H	4H	33.8	34.6	34.7	35.6	36.8	33.8	34.6	34.7	35.6	36.8
	6H	36.4	37.1	37.3	38.1	39.3	36.4	37.1	37.3	38.1	39.3
	8H	37.7	38.4	38.7	39.3	40.6	37.7	38.4	38.7	39.3	40.6

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 57	H(C0) = 48 H(C90) = 48	H(C180) = 48 H(C270) = 48
------------------------	---------------------------------	--------------------------------------	---------------------------	------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45°	34183.3
50°	49947.0
55°	69749.7
60°	94050.9
65°	123289.7
70°	154765.9
75°	193770.1
80°	233232.2
85°	271009.9

Photometric test report

Family Silica® 21 Ring	Order number: 5PJBO2D1104A EAN: 4058352958971	LP number 59505_5
---	--	------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

