

Photometric test report

Family
Silica® 21

Order number: **51MX11TBT5W**
EAN: **4058352754719**

LP number
59274_47

serial
documentation
03.05.2023

siteco

Version recessed luminaire, reflector, black, direct distribution, narrow distribution, $UGR \leq 19$ ($L65 \leq 3000 \text{ cd/m}^2$), tunable white

Lamps LED 2700 K | CRI ≥ 80

Controlgear ECG-DALI

Setting individual position


Rated values Net luminous flux = 4650 lm
Power consumption = 45.8 W
Luminous efficacy = 101.5 lm/W

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 1470 cd/klm

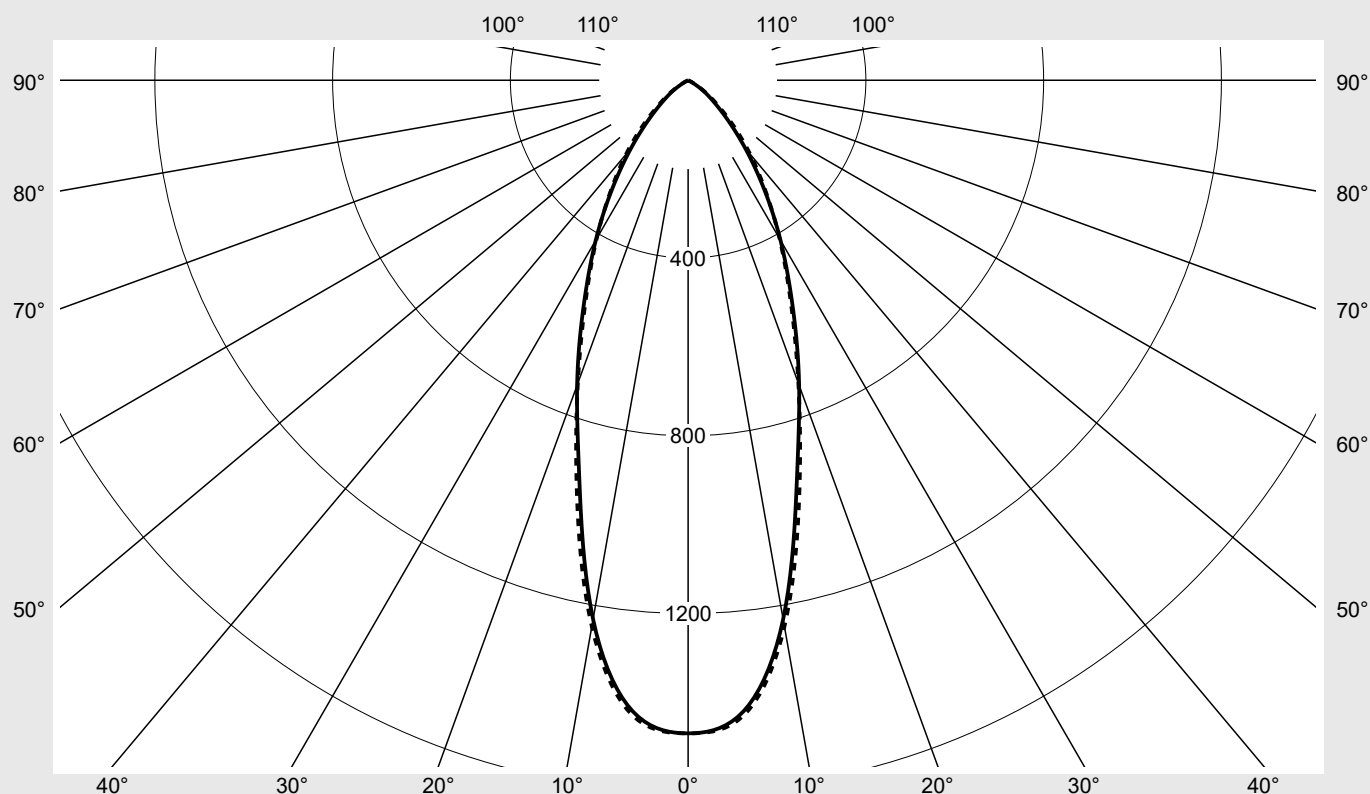

Classifications

DIN 5040 A 7 0
CIE N1=85 N2=99 N3=100
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX11TBT5W EAN: 4058352754719	LP number 59274_47
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	1469.7	1469.7	1469.7	1469.7	1469.7	1469.7	1469.7	8.8	8.8
5°	1425.9	1423.7	1417.2	1426.5	1433.0	1431.2	1434.7	68.2	77.0
10°	1231.5	1233.2	1235.5	1249.4	1249.6	1243.0	1248.1	118.2	195.2
15°	943.7	950.9	962.6	981.4	980.5	965.2	966.6	137.0	332.2
20°	730.3	729.1	721.8	719.8	726.6	719.9	725.4	135.8	468.0
25°	554.7	552.6	536.3	523.0	531.2	537.4	545.0	124.7	592.7
30°	415.7	413.6	392.8	386.6	400.6	405.5	411.7	110.2	702.9
35°	297.0	298.7	284.3	282.2	303.6	308.4	303.5	93.1	796.0
40°	200.5	204.3	201.1	204.4	221.4	223.2	217.2	74.2	870.2
45°	125.8	129.2	131.9	140.1	150.2	148.5	143.7	53.9	924.1
50°	74.7	77.5	82.6	89.5	95.9	91.3	86.7	36.2	960.3
55°	42.1	44.5	49.0	54.2	57.0	52.1	48.8	22.6	982.9
60°	13.9	17.2	26.8	30.8	30.6	21.8	18.2	11.3	994.3
65°	4.2	5.3	8.3	15.7	9.7	6.0	5.5	4.1	998.4
70°	1.8	1.9	1.6	3.1	2.1	2.4	2.5	1.1	999.6
75°	0.4	0.5	0.5	0.7	0.7	0.7	0.5	0.3	999.9
80°	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.1	999.9
85°	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.1	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 21		Order number: 51MX11TBT5W EAN: 4058352754719							LP number 59274_47	
UGR-Table		Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)			
x	y									
2H	2H	16.6	17.9	17.0	18.2	18.5	17.2	18.5	17.6	18.8
	3H	16.5	17.6	16.9	17.9	18.3	17.1	18.2	17.5	18.5
	4H	16.4	17.4	16.8	17.8	18.1	17.0	18.0	17.4	18.4
	6H	16.4	17.2	16.8	17.6	18.0	17.0	17.9	17.4	18.2
	8H	16.4	17.2	16.8	17.5	18.0	17.0	17.8	17.5	18.2
	12H	16.4	17.1	16.8	17.5	17.9	17.0	17.7	17.4	18.1
4H	2H	16.6	17.6	17.0	17.9	18.3	17.2	18.2	17.6	18.5
	3H	16.4	17.3	16.9	17.6	18.1	17.0	17.8	17.5	18.2
	4H	16.4	17.1	16.8	17.5	17.9	16.9	17.6	17.4	18.1
	6H	16.3	16.9	16.7	17.3	17.8	16.9	17.5	17.3	17.9
	8H	16.2	16.8	16.7	17.2	17.7	16.8	17.3	17.3	17.8
	12H	16.2	16.7	16.7	17.1	17.6	16.8	17.2	17.3	17.7
8H	4H	16.2	16.8	16.7	17.2	17.7	16.8	17.3	17.3	17.8
	6H	16.1	16.6	16.6	17.0	17.5	16.7	17.1	17.2	17.6
	8H	16.1	16.4	16.6	16.9	17.5	16.6	17.0	17.1	17.5
	12H	16.0	16.3	16.6	16.8	17.4	16.6	16.9	17.1	17.4
12H	4H	16.2	16.7	16.7	17.1	17.6	16.8	17.2	17.3	17.7
	6H	16.1	16.4	16.6	16.9	17.5	16.7	17.0	17.2	17.5
	8H	16.0	16.3	16.6	16.8	17.4	16.6	16.9	17.1	17.4

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1470 B = 49	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	11481.0	11794.1	12044.7	12792.5	13711.6	13561.9	13115.7
50°	7504.0	7783.0	8297.8	8984.0	9628.1	9169.6	8703.1
55°	4738.3	5006.9	5511.6	6098.8	6410.3	5861.2	5487.0
60°	1797.5	2215.8	3464.6	3982.0	3945.0	2813.8	2344.9
65°	640.5	811.4	1274.4	2400.2	1484.8	922.2	835.6
70°	339.9	362.4	307.5	581.0	394.9	457.7	476.6
75°	90.3	126.0	123.7	164.1	164.1	162.9	133.2
80°	32.0	35.3	42.4	51.3	63.9	78.1	78.1
85°	56.3	56.3	70.4	88.1	112.6	134.1	148.1

Photometric test report

Family
Silica® 21

Order number: 51MX11TBT5W
EAN: 4058352754719

LP number
59274_47

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco

